


### Features

- ◆ Ultra compact 15W converter
- ◆ Ultra wide 4:1 input voltage range
- ◆ Cost efficient open frame design with industry standard pin-out
- ◆ Surface-mount (SM) and through-hole version
- ◆ I/O isolation voltage 2250V, rated for basic insulation
- ◆ Extended operating temperature range  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- ◆ Remote On/Off
- ◆ Lead free design, RoHS compliant
- ◆ 3-years product warranty

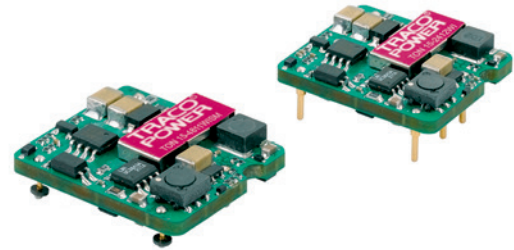

The TON-15WI series is a generation of high performance 15W dc-dc converters with ultra-wide input voltage range and precisely regulated output voltage. The ultra compact open frame design with industry standard pin-out provides the designer now a 50% smaller, cost efficient alternative to existing 10 to 15W converters in the market. Built-in filters for both input and output minimize the need for external filtering.

Further features include remote On/Off, output voltage trimming, over voltage protection and short circuit protection. Typical applications are distributed power systems, instrumentation and industrial electronics, everywhere where space on the PCB is a critical factor.

### Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TON 15-2410WI	9 – 36 VDC (24 VDC nominal)	3.3 VDC	4'000 mA	85 %
TON 15-2411WI		5.0 VDC	3'000 mA	87 %
TON 15-2412WI		12 VDC	1'300 mA	86 %
TON 15-2413WI		15 VDC	1'000 mA	86 %
TON 15-4810WI	18 – 75 VDC (48 VDC nominal)	3.3 VDC	4'000 mA	85 %
TON 15-4811WI		5.0 VDC	3'000 mA	87 %
TON 15-4812WI		12 VDC	1'300 mA	86 %
TON 15-4813WI		15 VDC	1'000 mA	86 %

Add suffix **SM** for surface mount version

### Input Specifications

Input current at no load	24 V; 3.3/5 Vout models: 24 V; 12/15 Vout models: 48 V; 3.3/5 Vout models: 48 V; 12/15 Vout models:	65 mA typ. 10 mA typ. 40 mA typ. 15 mA typ.
Input current at full load	24 V; 3.3 Vout models: 24 V; other output models: 48 V; 3.3 Vout models: 48 V; other output models:	680 mA typ. 790 mA typ. 340 mA typ. 390 mA typ.
Input voltage variation (dv/dt)		5 V/ms, max. (complies with ETS 300 132 part. 4.4)
Start-up voltage / under voltage lockout	24 V models: 48 V models:	9 VDC / 8 VDC 18 VDC / 16 VDC
Surge voltage (100 msec. max.)	24 V models: 48 V models:	50 V max. 100 V max.
Input filter		capacitor type (see application note for compliance to EN 55022 class A/B)
Radiated immunity		EN 61000-4-3 10 V/m, perf. criteriy A
Fast transient / surge		EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 1$ kV perf. criteria A with external input capacitor e.g. Nippon chemi-con KY 220 $\mu$ F, 100 V, ESR 48 mOhm
Conducted immunity		EN 61000-4-6, 3 Vrms, perf. criteria A
Reflected ripple current		30 mA <sub>p-p</sub> typ.

### Output Specifications

Voltage set accuracy		$\pm 1$ %
Output voltage adjustment		$\pm 10$ % (see application note)
Regulation	- Input variation Vin min. to Vin max. - Load variation 0 – 100 %	0.2 % max. 0.2 % max.
Minimum load		0 % of rated max. load
Temperature coefficient		$\pm 0.02$ %/K
Ripple and noise (20 MHz Bandwidth, measured with 1 $\mu$ F M/C and 10 $\mu$ F TC)		100 mV <sub>pk-pk</sub> typ
Start up time	- Power On (constant resistive load) - Remote On	30 ms typ. 30 ms typ.
Transient response setting time (25% load step chang)		250 $\mu$ s typ.
Short circuit protection		indefinite (automatic recovery)
Over load protection		at 150 % of Iout max., foldback
Over voltage protection	3.3 Vout models: 5 Vout models: 12 Vout models: 15 Vout models:	3.7 – 5.4 Vout 5.6 – 7.0 Vout 13.8 – 17.5 Vout 16.8 – 20.5 Vout
Capacitive load	3.3 Vout & 5.0 Vout models: 12 Vout models: 15 Vout models:	1'000 $\mu$ F max. 330 $\mu$ F max. 220 $\mu$ F max.

### General Specifications

Temperature ranges	- Operating - Storage	-40°C to +85°C (with derating) -55°C to +125°C
Derating		6.7 %/K above 75°C
Humidity (non condensing)		5 % to 95 % rel H

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**General Specifications**

Thermal shock		acc. MIL-STD-810F
Vibration		acc. MIL-STD-810F
Reliability, calculated MTBF (MIL-HDBK-217F, at 25°C, ground benign)		>2.4 Mio. h
Isolation voltage (60 sec) – Input / Output		2'250 VDC (complies with basic insulation rating per EN 60950-1)
Isolation resistance – Input / Output		>1'000 M Ohm
Isolation capacitance – Input / Output		1500 pF max.
Switching frequency (Pulse width modulation PWM)	3.3 / 5 Vout models: 12 / 15 Vout models:	350 kHz typ. 400 kHz typ.
Remote On/Off – On: – Off: – Off idle current:		3.0 to 15 VDC or open circuit. 0 to 1.2 VDC or short circuit pin 6 and pin 2 2.5 mA typ. negative remote On/Off logic on demand
Safety standards		UL 60950-1, EN 60950-1, IEC 60950-1
Safety approval		<a href="http://www.ul.com">www.ul.com</a> -> certifications -> File e188913
Environmental compliance – Reach – RoHS		<a href="http://www.tracopower.com/products/reach-declaration.pdf">www.tracopower.com/products/reach-declaration.pdf</a> RoHS directive 2011/65/EU


**Physical Specifications**

Weight		10.5g (0.36oz)
Soldering profile for trough hole version		max. 265°C / 10 sec. (wave soldering)
Lead-free reflow solder process for SMD-package models		as per J-STD-020D.01 (to find at: <a href="http://www.jedec.org">www.jedec.org</a> - free registration required)
Washing procedure		<a href="http://www.tracopower.com/products/ton15-clean.pdf">www.tracopower.com/products/ton15-clean.pdf</a>

**Application note:** [www.tracopower.com/products/ton15wi-application.pdf](http://www.tracopower.com/products/ton15wi-application.pdf)

**Outline Dimensions**

SMD version (SM) thru hole version (TH)

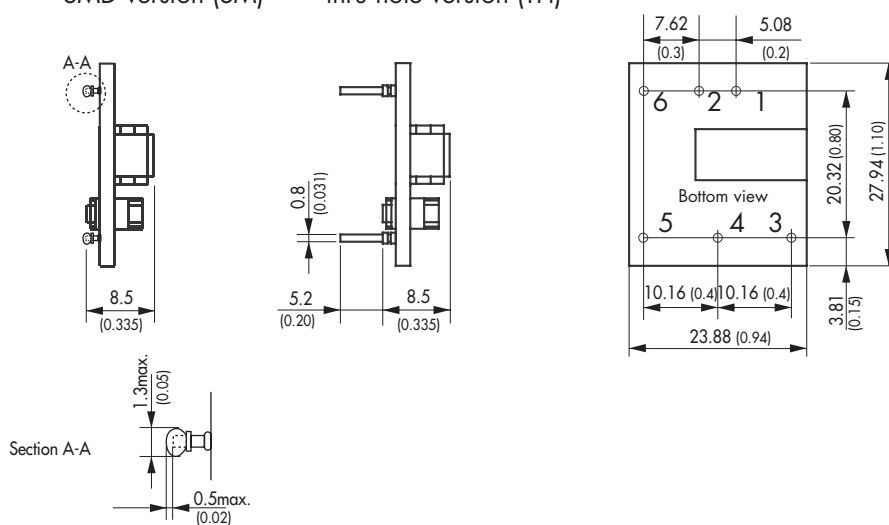

Pin-Out	
Pin	Single
1	+Vin (Vcc)
2	-Vin (GND)
3	+Vout
4	Trim
5	-Vout
6	Remote On/Off

Dimensions in [mm], ( ) = Inch  
Tolerances: ±0.5 (±0.02)  
Pin pitch tolerances: ±0.25 (±0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.