



ACC600 Series

Convection Cooled Open Frame Power Supplies

The ACC600 Series of open frame power supplies feature a wide universal AC input range of 85 – 264 VAC, offering up to 600 W of output power with convection cooling (U-Channel), in a compact footprint, with a variety of single output voltages.

The high efficiency and high power density of the ACC series ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

These power supplies are ideal for medical, telecom, datacom, industrial equipment and other applications.



Key Features & Benefits

- 5 x 8.5 x 1.61 Inch Form Factor (127 x 216 x 41 mm)
- Convection Cooling Rated
- Universal Input
- Current Sharing Option
- Peak Power Capability
- 5 VDC Stand by
- 12 V fan output
- Power Good / Power Fail Signal
- Suitable in POE applications
- Lesser than 1U high
- Having high voltage output range up to 58 VDC
- N+1 redundant power supply
- Single wire current sharing
- Built in OR-ing diode / FET (- R suffix)

Applications

- Instrumentation
- Lighting
- Industrial Applications
- Applied Computing
- Renewable Energy
- Test and Measurement
- Robotics
- Wireless Communication



bel POWER SOLUTIONS & PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

| MODEL NUMBER* | VOLTAGE | TYPE | MAX. LOAD (CONVECTION) | MIN. LOAD | RIPPLE & NOISE |
|---------------|---------|-----------|------------------------|-----------|----------------|
| ACC600-1T12 | 12 V | U-Channel | 25 A | 0.0 A | 2% |
| ACC600-1T15 | 15 V | U-Channel | 25 A | 0.0 A | 2% |
| ACC600-1T24 | 24 V | U-Channel | 25 A | 0.0 A | 2% |
| ACC600-1T30 | 30 V | U-Channel | 20 A | 0.0 A | 2% |
| ACC600-1T48 | 48 V | U-Channel | 12.5 A | 0.0 A | 2% |
| ACC600-1T58 | 58 V | U-Channel | 10.34 A | 0.0 A | 2% |

* To order product without the redundancy diode option please add the suffix-Sxxx to your required part number. Please contact the factory for availability.

2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|---------------------|--|-----------------------------------|
| Input Voltage | Universal | 85 – 264 VAC / 120 – 390 VDC |
| Input Frequency | | 47 – 63 Hz |
| Input Current | 120 VAC: 240 VAC: | 6.5 A max. 3.2 A max. |
| Input Protection | In Live & Neutral both | F16 A / 250 V |
| No Load Power | Over entire input range with main output kept OFF using Remote ON/OFF | 3 W typ. |
| Inrush Current | 240 VAC: | 25 A max. |
| Leakage Current | 240 VAC / 50 Hz | 400 μ A |
| Touch Current: | | < 100 μ A |
| Power Factor | 120 VAC: 240 VAC: | 0.98 0.95 |
| Switching Frequency | PFC converter: Variable Resonant converter: Variable | 85 kHz typical 100 kHz typical |

3. OUTPUT SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|-----------------------------|--|--------------------------------|
| Output Power | Convection | 600 W |
| Efficiency | 120 VAC: 240 VAC: | 88% Typical 93% |
| Hold-up Time | 120 VAC / 240 VAC: | 8 ms |
| Line Regulation | | +/-0.5% |
| Load Regulation | | +/-1.0% |
| Transient Response | 50% to 100% load change, 50 Hz, 50% duty cycle, 0.1 A/ μ s | < 10%, recovery time < 5 ms |
| Voltage Adjustment | | +/-3% |
| Set Point Tolerance | | +/-1% |
| Rise Time | | <100 ms |
| Over Current Protection | Hic-Up Type, autorecovery | 110% |
| Over Voltage Protection | Latch Type, AC Power to be recycled for recovery | 114% |
| Short Circuit Protection | Latch Type, AC Power to be recycled for recovery | |
| Over Temperature Protection | Autorecovery | 130 - 140°C primary heat sink |
| Current Share | Up to 3 supplies connected in parallel (optional) | |



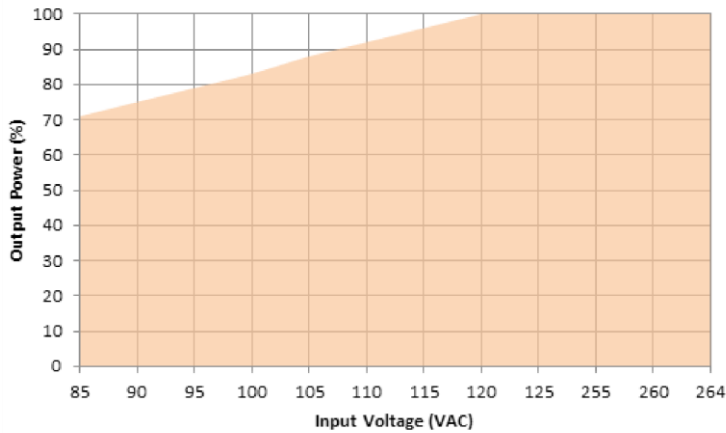


Figure 1. Power Derating w.r.t Input

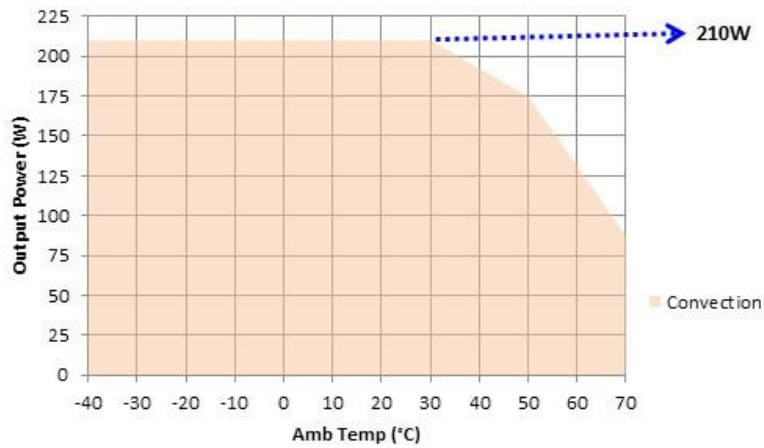


Convection load: 300 W up to 30 °C
 De-rate between 30-50 °C @ 0.833% per °C
 De-rate above 50 °C @ 2.5% per °C

Figure 2. Power Derating Curve 12 V

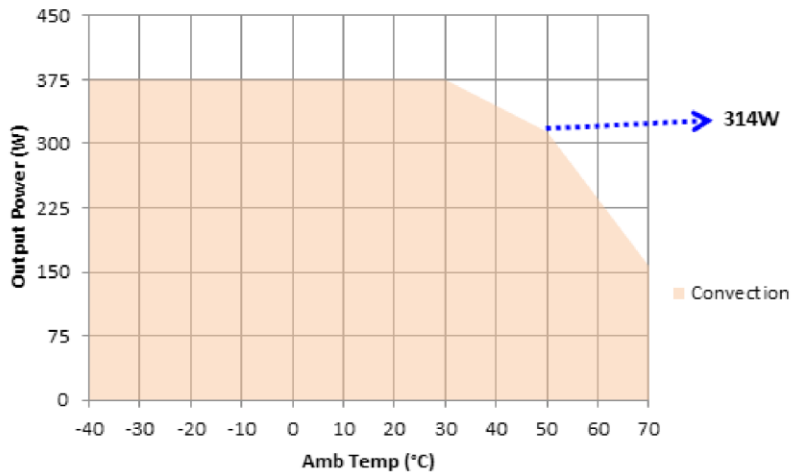

Convection load: 375 W up to 30 °C
 De-rate between 30-50 °C @ 0.8133% per °C
 De-rate above 50 °C @ 2.5% per °C

Figure 3. Power Derating Curve 15 V

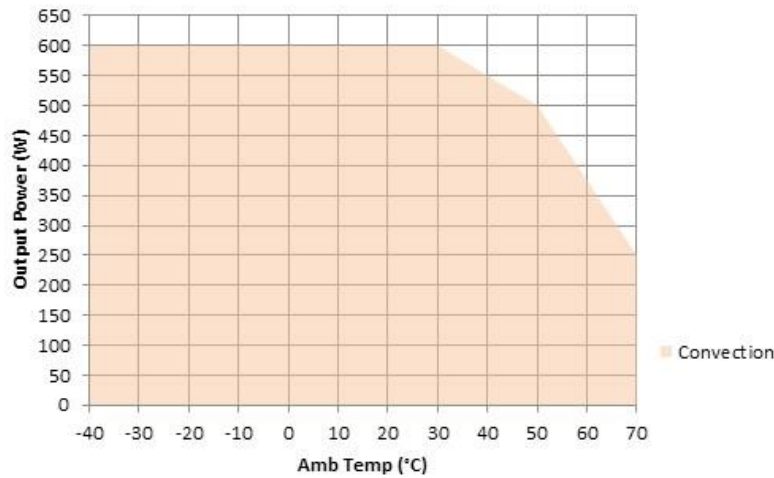

Convection load: 600 W up to 30 °C
 De-rate between 30-50 °C @ 0.833% per °C
 De-rate above 50 °C @ 2.5% per °C

Figure 4. Power Derating Curve 24 V and above

4. ENVIRONMENTAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|-----------------------|------------------------------|--------------------------|
| Operating Temperature | Refer to derating curve | -40 to +70°C |
| Storage Temperature | | -40 to +85°C |
| Relative Humidity | Non-condensing | 5% to 95% |
| Altitude | Operating: Non-operating: | 16,000 ft. 40,000 ft. |
| MTBF | Telcordia -SR332-issue 3 | 3.37 million hours |

5. EMC SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | CRITERIA |
|------------------------------------|-------------------------|---|
| Conducted Emissions | EN55032 | Class B |
| Radiated Emissions | EN 55032 | Class A (Class B with External king core K5B RC 25x12x15-M or equivalent) |
| Input Current Harmonics | EN 61000-3-2 | Class A |
| Voltage Fluctuation and Flicker | EN 61000-3-3 | Pass |
| ESD Immunity | EN 61000-4-2 | A |
| Radiated Field Immunity | EN 61000-4-3 | A |
| Electrical Fast Transient Immunity | EN 61000-4-4 | A |
| Surge Immunity | EN 61000-4-5 | A |
| Conducted Immunity | EN 61000-4-6 | A |
| Magnetic Field Immunity | EN 61000-4-8 | A |
| Voltage Dips, Interruptions | EN 61000-4-11 | A & B |

6. SAFETY SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|--------------------|--|----------------------|
| Isolation Voltage | Input to Output Input to Earth | 4000 VDC 2500 VDC |
| Safety Standard(s) | IEC/EN 62368-1, ED 2 UL62368-1, CSA C22.2 No. 62368-1 | |
| Agency Approvals | Nemko, UL, C-UL | |
| CE mark | Complies with LVD Directive | |

NOTES:

1. For Ripple measurement minimum output power requirement is 25 W. Ripple is peak to peak with 20 MHz bandwidth and 10 μ F (Tantalum capacitor) in parallel with a 0.1 μ F capacitor at rated line voltage and load ranges. Please contact factory/ sales representative for minimum load required for ripple to be within specification.
2. Combined output power of main output, fan supply and standby supply shall not exceed max. power rating.
3. Standby output voltage 5 V / 1.5 A (convection) with tolerance including set point accuracy, line and load regulation is +/-10%. Ripple and noise is less than 5%.
4. Specifications are for nominal input voltage, 25°C unless otherwise stated.
5. PSU is supplied with J3, pin-6 and pin-7 shorted to enable main output without remote on/off feature.

7. SIGNALS

| PARAMETER | DESCRIPTION / CONDITION |
|--------------------------|--|
| Power Good / Fail Signal | Power Good: Is a TTL signal which goes high after main output reaches 90% of its set value. The delay is 0.1 s to 0.5 s Power Fail: The same signal goes low at least 1ms before main output falls to 90% of set value at AC Power off |
| Remote Sense | Compensates for 200 mV drop |
| Remote On / Off | Pin 6 & Pin 7 of J3 can be used for Remote on/off. Shorting Pin 6 to Pin 7 enables main output while keeping the pins open disables main output |
| OCP Limit Set | Pin 8 & Pin 9 of J3 must be left open |

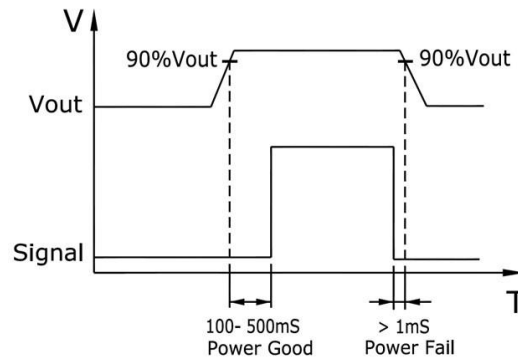


Figure 5. Power Good / Fail Signal Diagram


8. CONNECTOR & PIN DESCRIPTION

| CONNECTOR | PIN | DESCRIPTION / CONDITION | MANUFACTURER / PN |
|---------------------|-----------------|--|--|
| AC Input Connector | J1 | Pin 1 AC Line Pin 2 Neutral Pin 3 Earth | TE Connectivity: NC6-P107-03 |
| DC Output Connector | J2 | J2-A +VE J2-B -VE | 6-32 inches Screw Pan HD Mating: Designed to accept Ring Tongue Terminal AMP: 8-31886-1, wherein one 16 AWG (max) wire can be crimped. Note: One Ring Tongue Terminal with 16 AWG is recommended for current up to 11 A only. Use multiple tongue terminals with wire for more current. |
| Aux (Fan) Output | J3 ¹ | Pin 1 GND Pin 2 5V AUX Pin 3 PGPF Pin 4 VS - Pin 5 VS + Pin 6 GND Pin 7 RMT Pin 8 CL2 Pin 9 CL1 Pin 10 LS | Molex: 22-23-2101 Mating: 22-01-2107; Pins: 08-50-0113 |
| Fan Output | J10, J11 | Pin 1 +VE Pin 2 -VE | |

9. MECHANICAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION |
|------------|---|
| Weight | 1100 g |
| Dimensions | 127 x 216 x 41 mm (5.0 x 8.5 x 1.61 inches) |
| Cooling | Convection: 600 W (U-Channel) |

¹ PSU is supplied with J3, pin-6 and pin-7 shorted to enable main output without remote on/off feature.

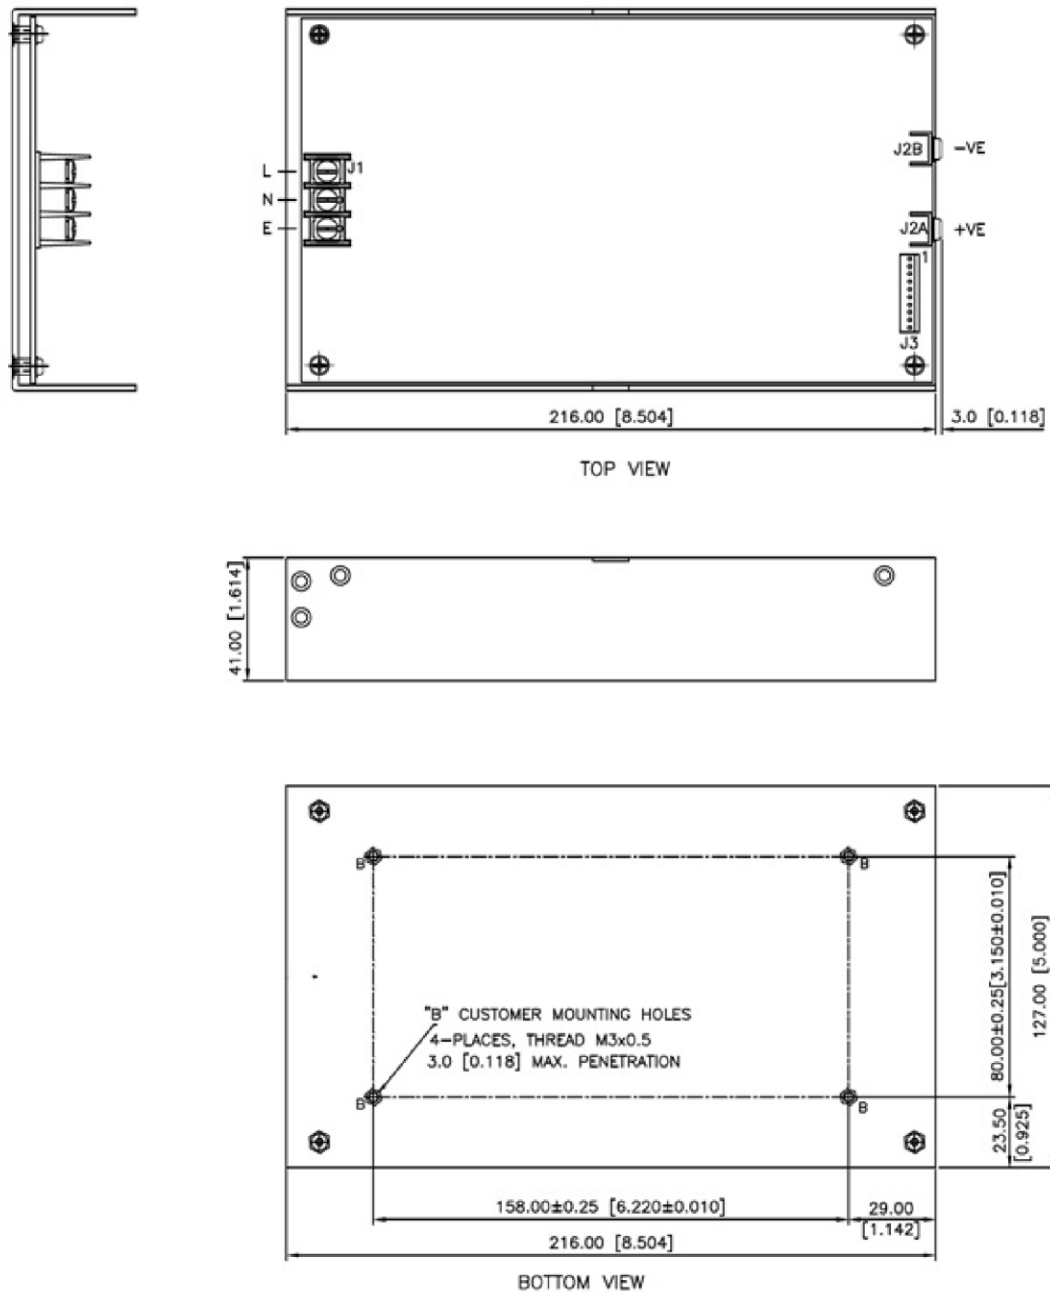

MECHANICAL OUTLINE DIMENSIONS
 ALL DIMENSIONS ARE IN MM [INCHES]
 GEN.TOLERANCE: ±1.0 MM [±0.04]

Figure 6. Mechanical drawings

10. INSTALLTION INSTRUCTION FOR CURRENT SHARING

During the installation and setup of parallel supplies in a system it is important that a single remote sense point be used for all the supplies. The remote sense voltage between the supplies must be adjusted to within 1% to ensure the supplies are inside the 1% capture window. If the supplies are not initially adjusted inside the capture window the supplies will not current share satisfactorily.

SET-UP PROCEDURE:

1. Connect load cables to the outputs of each supply.
2. Connect the remote sense lines to the load in twisted style. (A common remote sense point must be used for all the supplies in parallel).
3. Connect all the "LS" signal (Pin 10) on the J3 connector between the supplies.
4. Adjust remote sense voltage of each supply to within 1% of rated output voltage or readjust to required set point. (Adjustment to be done with all other parallel supplies off).
5. Current sharing between the supplies can be verified by monitoring the output current of each supply with a hall effect DC current probe. The supplies should share to within 10% of the total load current.
6. The current share circuit has a capture window voltage of +/- 1% of the rated output voltage. If the output remote sense voltage of one of the supplies is adjusted outside the 1% window the supplies will not current share satisfactorily.

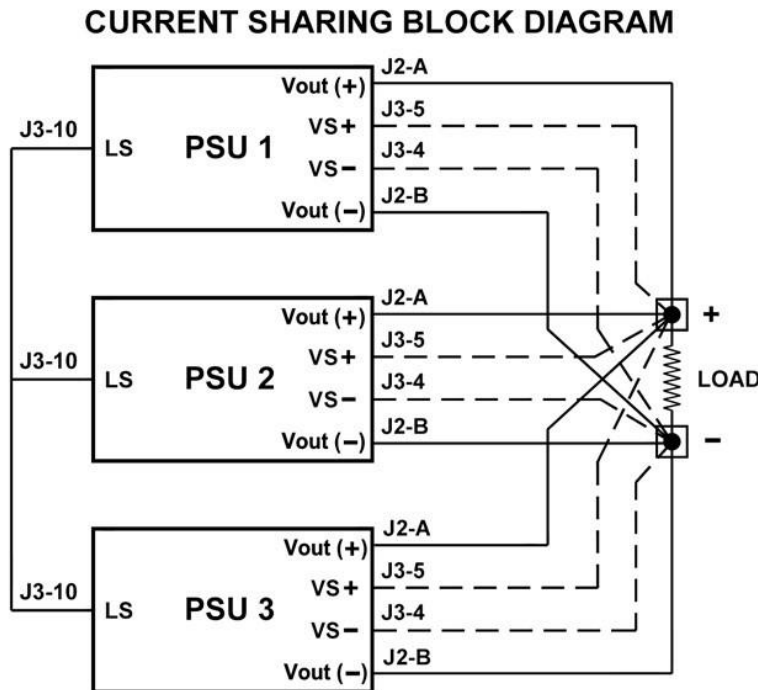


Figure 7. Current Sharing Block Diagram

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.