




# NEW!

# High Frequency, High Current Power Inductors

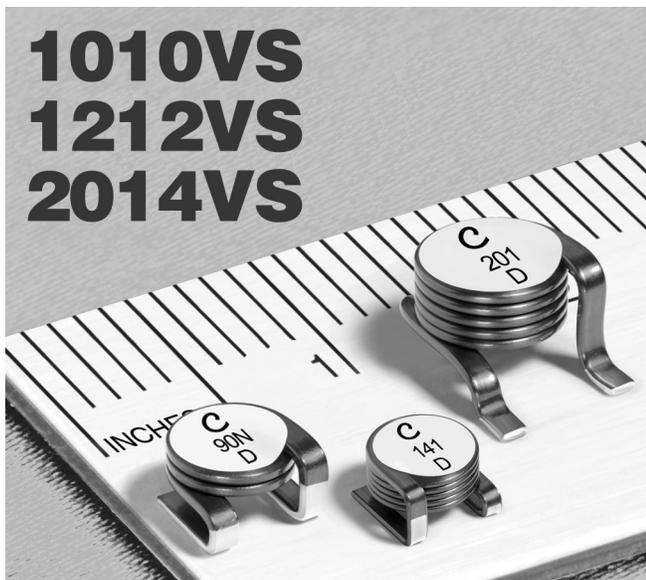

**1010VS**  
**1212VS**  
**2014VS**

- Excellent Q factors – up to 230 at 400 MHz!
- Current handling as high as 57 Amps
- Inductance values from 22 to 257 nH

**Environmental** RoHS compliant, halogen free

**Terminations** RoHS compliant tin-silver over copper

**Ambient temperature** –40°C to +125°C with Irms current, +125°C to +145°C with derated current

**Storage temperature** Component: –40°C to +145°C.  
Tape and reel packaging: –40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Temperature Coefficient of Inductance (TCL)** +5 to +70 ppm/°C

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Mean Time Between Failures (MTBF)** 1 billion hours

**PCB washing** Tested with pure water or alcohol only. For other solvents, see Doc787\_PCB\_Washing.pdf.

| Part number <sup>1</sup> | Inductance <sup>2</sup><br>±20%<br>(nH) | Q <sup>3</sup><br>typ | Q test<br>freq<br>(MHz) | SRF typ <sup>4</sup><br>(MHz) | DCR<br>(mOhm) |      | Irms (A) <sup>5</sup> |              | Weight<br>(g) |
|--------------------------|---|-----------------------|-------------------------|-------------------------------|---------------|------|-----------------------|--------------|---------------|
|                          |   |                       |                         |                               | typ           | max  | 20°C<br>rise          | 40°C<br>rise |               |
| 1010VS-23NME_            | 23.5                                    | 95                    | 100                     | 923                           | 1.05          | 1.20 | 18.0                  | 26.0         | 0.49          |
| 1010VS-46NME_            | 46.5                                    | 150                   | 100                     | 526                           | 1.50          | 1.62 | 17.9                  | 25.5         | 0.65          |
| 1010VS-79NME_            | 79.0                                    | 135                   | 50                      | 386                           | 1.95          | 2.11 | 17.8                  | 25.0         | 0.82          |
| 1010VS-111ME_            | 111                                     | 150                   | 50                      | 382                           | 2.53          | 2.73 | 15.7                  | 22.0         | 0.98          |
| 1010VS-141ME_            | 146                                     | 140                   | 50                      | 433                           | 3.08          | 3.33 | 14.1                  | 19.3         | 1.23          |
| 1212VS-22NME_            | 22.0                                    | 200                   | 100                     | 918                           | 0.48          | 0.55 | 40.5                  | 57.0         | 2.20          |
| 1212VS-42NME_            | 42.0                                    | 195                   | 50                      | 557                           | 0.70          | 0.77 | 38.0                  | 52.0         | 2.70          |
| 1212VS-66NME_            | 66.0                                    | 200                   | 50                      | 480                           | 0.90          | 0.99 | 35.0                  | 48.0         | 3.20          |
| 1212VS-90NME_            | 90.0                                    | 175                   | 50                      | 444                           | 1.10          | 1.21 | 33.0                  | 45.0         | 3.70          |
| 1212VS-111ME_            | 117                                     | 165                   | 50                      | 399                           | 1.30          | 1.43 | 32.0                  | 44.0         | 4.20          |
| 2014VS-33NME_            | 33                                      | 230                   | 100                     | 620                           | 0.63          | 0.74 | 32.5                  | 43.0         | 1.60          |
| 2014VS-66NME_            | 66                                      | 200                   | 50                      | 413                           | 0.90          | 1.00 | 31.5                  | 42.5         | 2.30          |
| 2014VS-111ME_            | 108                                     | 210                   | 50                      | 320                           | 1.20          | 1.34 | 31.0                  | 42.0         | 3.10          |
| 2014VS-151ME_            | 155                                     | 205                   | 50                      | 296                           | 1.44          | 1.60 | 29.4                  | 39.7         | 3.60          |
| 2014VS-201ME_            | 202                                     | 200                   | 50                      | 262                           | 1.70          | 1.82 | 26.3                  | 35.8         | 4.40          |
| 2014VS-251ME_            | 257                                     | 200                   | 50                      | 230                           | 1.94          | 2.15 | 24.9                  | 34.5         | 5.00          |

1. When ordering, specify **packaging** code:

2014VS-251MEC

- Packaging:** C = 7" machine-ready reel. EIA-481 embossed plastic tape.
- B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.
- D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked.

2. Inductance measured at 1.0 MHz, 0.1 Vrms, 0 A using an Agilent/HP HP4291A impedance analyzer with an Agilent/HP 16193A test fixture or equivalents.
3. Q measured at the specified frequency using an Agilent/HP 4291A impedance analyzer or equivalent.
4. SRF measured using an Agilent/HP 8753 network analyzer or equivalent and a Coilcraft CCF1199 test fixture
5. Current that causes the specified temperature rise from 25°C ambient.
6. Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 893-1 Revised 01/23/13

© Coilcraft Inc. 2013


This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

**NEW!**








# High Frequency, High Current Power Inductors – 1010VS, 1212VS, 2014VS

**L vs Frequency**

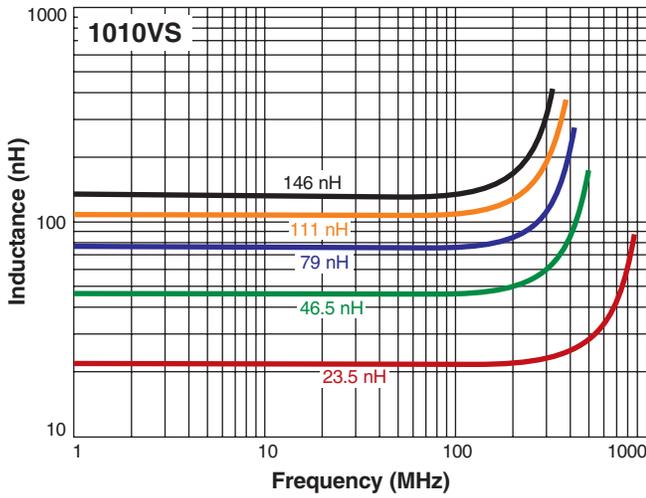

**Q vs Frequency**

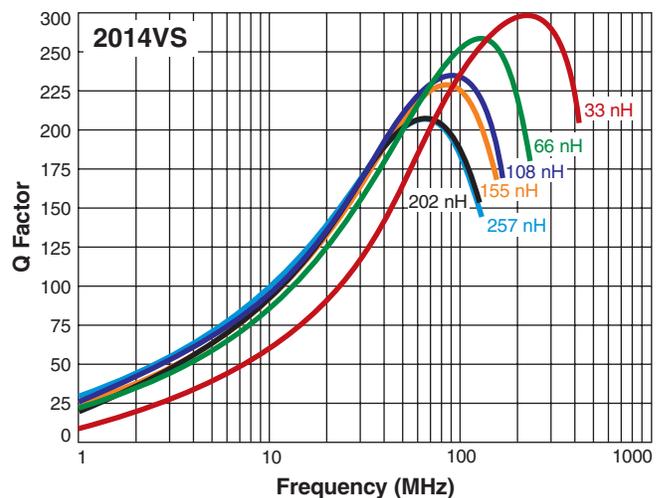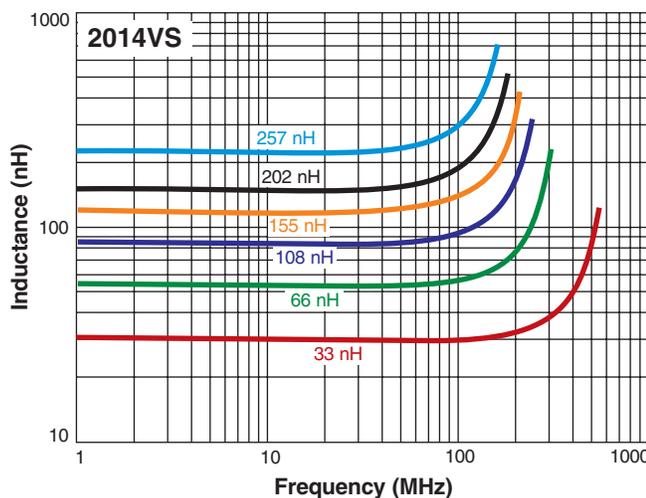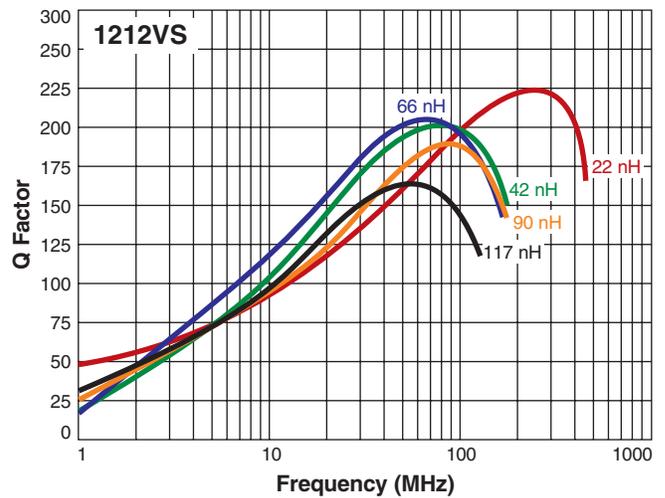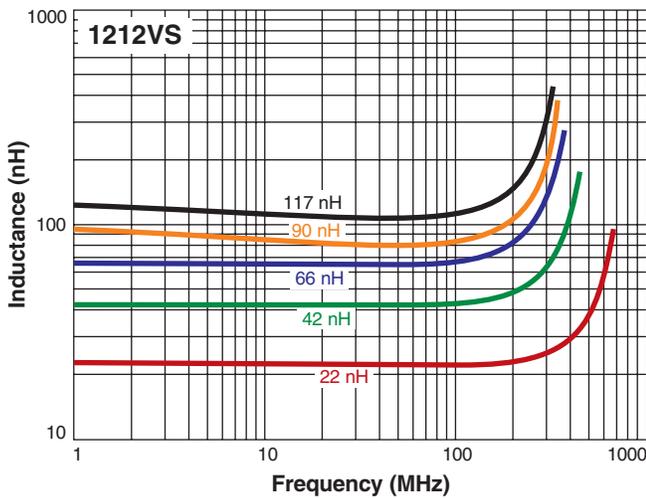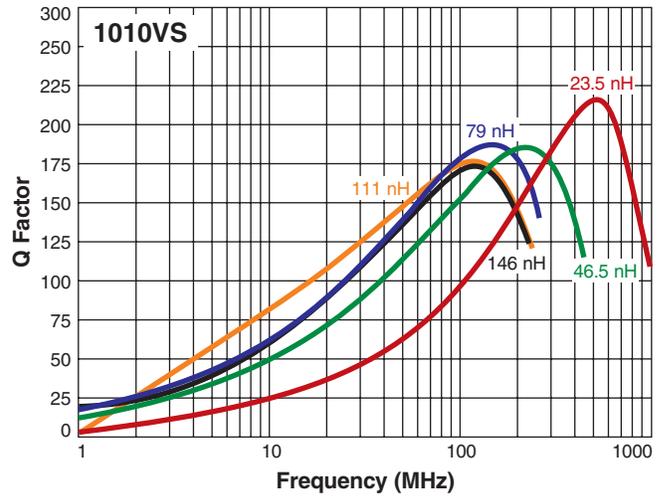

**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg


Document 893-2 Revised 01/23/13  
 © Coilcraft Inc. 2013  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

**NEW!**




# High Frequency, High Current Power Inductors – 1010VS, 1212VS, 2014VS


## 1010VS

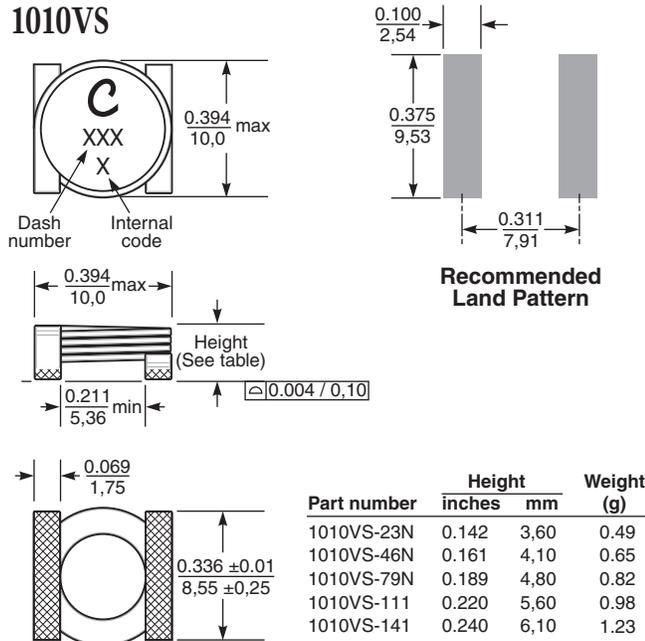

## 2014VS

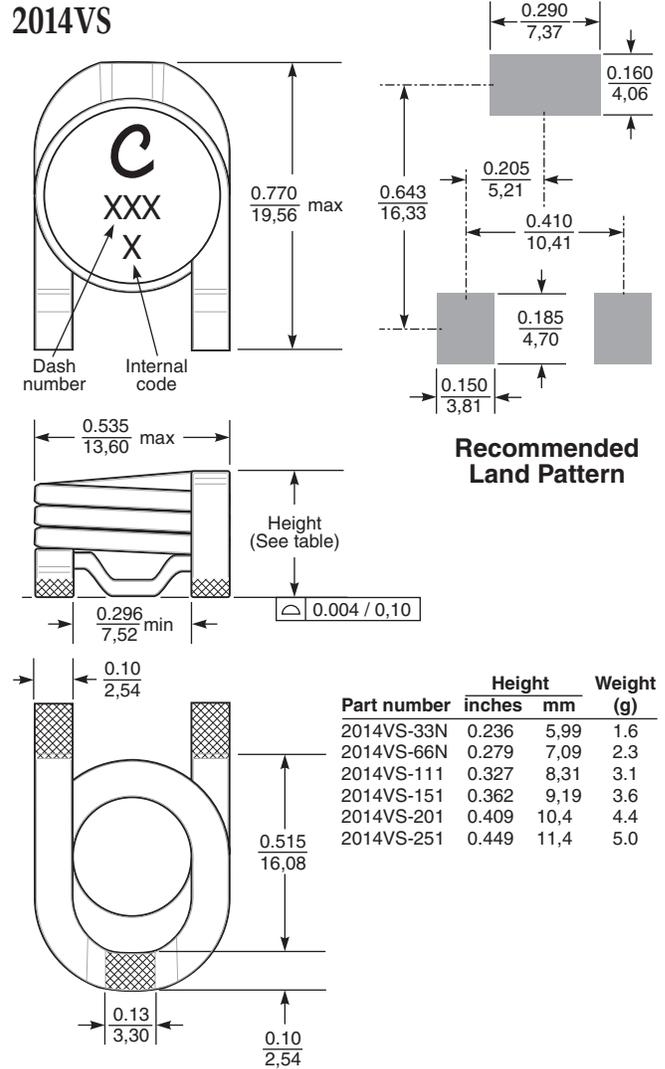

## 1212VS

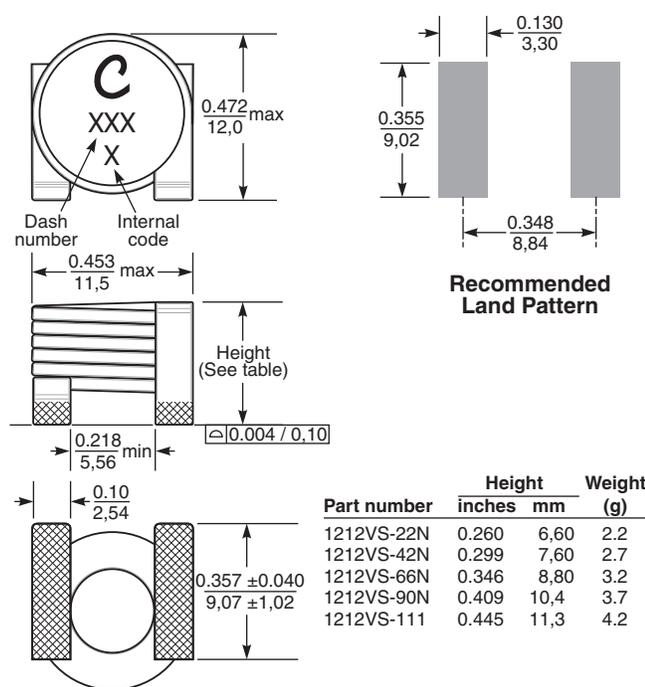

### Packaging

- 1010VS-23N** 250/7" reel ; 1000/13" reel ; 3.81 mm pocket depth
- 1010VS-46N** 250/7" reel ; 900/13" reel ; 4.32 mm pocket depth
- 1010VS-79N** 200/7" reel ; 800/13" reel ; 5.05 mm pocket depth  
Plastic tape: 24 mm wide, 0.35 mm thick, 16 mm pocket spacing
- 1010VS-111** 175/7" reel ; 700/13" reel ; 5.84 mm pocket depth
- 1010VS-141** 150/7" reel ; 600/13" reel ; 6.35 mm pocket depth  
Plastic tape: 24 mm wide, 0.40 mm thick, 16 mm pocket spacing
- 1212VS-22N** 450/13" reel ; 8.86 mm pocket depth
- 1212VS-42N** 400/13" reel ; 7.87 mm pocket depth
- 1212VS-66N** 350/13" reel ; 9.02 mm pocket depth
- 1212VS-90N** 300/13" reel ; 10.67 mm pocket depth
- 1212VS-111** 250/13" reel ; 11.68 mm pocket depth  
Plastic tape: 24 mm wide, 0.50 mm thick, 20 mm pocket spacing
- 2014VS-33N** 500/13" reel ; 6.22 mm pocket depth
- 2014VS-66N** 450/13" reel ; 7.37 mm pocket depth
- 2014VS-111** 400/13" reel ; 8.56 mm pocket depth
- 2014VS-151** 350/13" reel ; 9.45 mm pocket depth
- 2014VS-201** 350/13" reel ; 10.67 mm pocket depth
- 2014VS-251** 250/13" reel ; 11.68 mm pocket depth  
Plastic tape: 44 mm wide, 0.50 mm thick, 20 mm pocket spacing

All dimensions are in  $\frac{\text{inches}}{\text{mm}}$ .



**US** +1-847-639-6400 sales@coilcraft.com  
**UK** +44-1236-730595 sales@coilcraft-europe.com  
**Taiwan** +886-2-2264 3646 sales@coilcraft.com.tw  
**China** +86-21-6218 8074 sales@coilcraft.com.cn  
**Singapore** + 65-6484 8412 sales@coilcraft.com.sg

Document 893-3 Revised 01/23/13  
 © Coilcraft Inc. 2013  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.