

Solderable GaAs Constant Gamma Flip-Chip Varactor Diode

V3

Features

- Usable Past 70GHz
- Constant Gamma for Linear Tuning
- Low Parasitic Capacitance
- High Q
- Silicon Nitride Passivation
- Polyimide Scratch Protection
- Surface Mount Configuration
- Lead Free (RoHs Compliant)
- Available in Pocket Tape and Reel.
- Can withstand 500 Temperature Cycles (-65 Deg.C. to +150 Deg.C), mounted with 96.5Sn/3.5Ag solder without Mechanical Degradation.
- Can be Mounted with Solder or Conductive Epoxy.

Description

M/A-COM Technology Solutions' MAVR-000120-1411 is a gallium arsenide flip chip hyperabrupt varactor diode. This device is fabricated on OMCVD epitaxial wafers using a process designed for high device uniformity and extremely low parasitics. This diode is fully passivated with silicon nitride and has an additional layer of polyimide for scratch protection. The protective coatings prevent damage to the junction during automated or manual handling. The flip chip configuration is suitable for pick and place insertion.

Ordering Information

| Part Number | Package |
|--------------------|-------------|
| MAVR-000120-14110P | Pocket Tape |
| MAVR-000120-14110G | Gel Pack |


Absolute Maximum Ratings ^{1,2}

| | |
|-----------------------|-----------------|
| Operating Temperature | -40°C to +125°C |
| Storage Temperature | -65°C to +150°C |
| Power Dissipation | 100 mW |
| Mounting Temperature | +260C |

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

Chip Layout

Front View (Circuit Side)



Back View (Operator Side)



1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
 • India Tel: +91.80.43537383 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

MAVR-000120-1411

Solderable GaAs Constant Gamma Flip-Chip Varactor Diode

V3


Electrical Specifications @ $T_A = +25\text{ }^\circ\text{C}$

Breakdown Voltage @ $I_R = 10\text{mA}$, $V_b = 20\text{ V}$ Minimum
 Reverse Leakage Current @ $V_R = 14\text{V}$, $I_R = 100\text{ nA}$ Maximum


| Part Number | Ct (pF) | | | Ct (pF) | | | Ct (pF) | | | Q Factor (pF) | | | Gamma (pF) | | |
|------------------|----------------------------|------|------|----------------------------|------|------|-----------------------------|------|------|-----------------------------|------|------|-----------------------------|------|------|
| | f=1MHZ, $V_R = 0\text{ V}$ | | | f=1MHZ, $V_R = 4\text{ V}$ | | | f=1MHZ, $V_R = 10\text{ V}$ | | | f=50MHZ, $V_R = 4\text{ V}$ | | | $V_R = 2\text{-}12\text{V}$ | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. |
| MAVR-000120-1141 | 1.1 | | | 0.30 | 0.40 | | 0.14 | 0.20 | | 3000 | | | 0.9 | 1.1 | |

Schematic

FLIPCHIP TUNING VARACTOR EQUIVALENT CIRCUIT

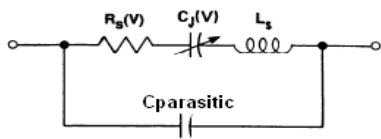

TYPICAL PERFORMANCE CURVE @ +25 °C
CAPACITANCE VS VOLTAGE
GAMMA = 1.00 +/- 10% FROM 2 to 12 Volts

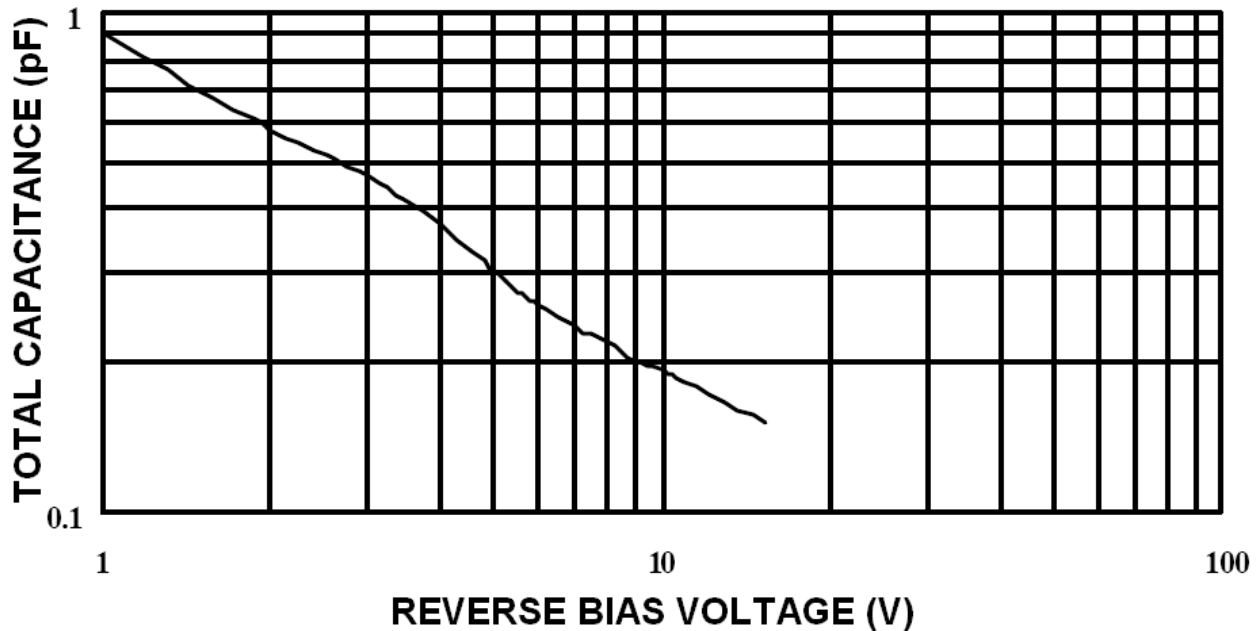

2 * Specifications are subject to change without prior notification

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
 • India Tel: +91.80.43537383 • China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Mounting Techniques

Die attach for these devices is made simple through the use of surface mount die attach technology. This chip was designed to be inserted onto hard or soft substrates with the junction side down. This chip can be mounted with conductive epoxy or with solder.

Solder Die Attach:

This device can be mounted with Sn63/Pb37 or RoHS compliant solder. Typical reflow profiles are provided on M/A-Com application note M538, "Surface Mounting Instructions" which can be found @ www.macomtech.com

Epoxy Die Attach:


This device can also be attached with conductive epoxy. The assembly can be preheated to 125 - 150°C. Use a minimum amount of epoxy. Cure epoxy as per manufacturer's instructions.

Handling Procedures


The following precautions should be observed to avoid damaging these chips:

- Cleanliness:** The chips should be handled in a clean environment. Do not attempt to clean die after installation.
- Static Sensitivity:** Semiconductor devices are ESD sensitive and can be damaged by static electricity. Proper ESD techniques should be used when handling these devices.
- General Handling:** The protective polymer coating on the active areas of these die provides scratch protection, particularly for the metal air bridge which contacts the anode. Die can be handled with tweezers or vacuum pickups and are suitable for use with automatic pick-and-place equipment.

Flip Chip Outline Drawing

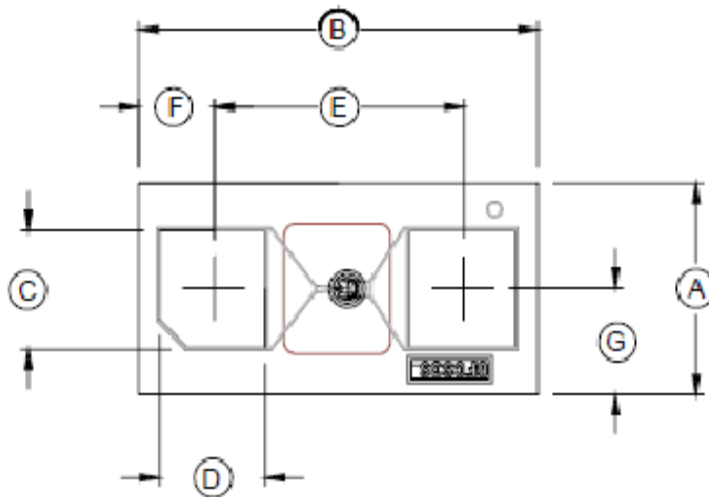

Case Style 1500

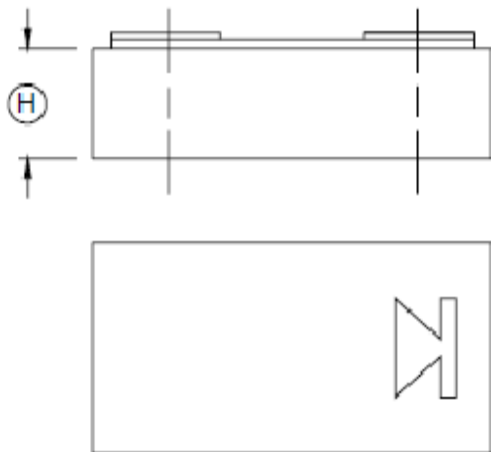

| DIM. | INCHES | | MILLIMETERS | |
|------|--------|--------|-------------|-------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 0.015 | 0.017 | 0.381 | 0.431 |
| B | 0.029 | 0.031 | 0.736 | 0.787 |
| C | 0.008 | 0.009 | 0.203 | 0.228 |
| D | 0.007 | 0.008 | 0.178 | 0.203 |
| E | 0.016 | 0.017 | 0.406 | 0.431 |
| F | 0.006 | 0.007 | 0.152 | 0.178 |
| G | 0.0075 | 0.0085 | 0.190 | 0.216 |
| H | 0.0075 | 0.0085 | 0.190 | 0.216 |

1. Pad finish is .2 microns of gold over 4 microns of nickel.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.