

Description

RClamp[®]7534P is a high performance TVS array aimed at simultaneously protecting 4 signal lines from overvoltage events caused by ESD, CDE (Cable Discharge Events) and EFT (electrical fast transients). RClamp7534P features an extremely low max capacitance of 0.19pF (Typical) and is designed to protect high speed interfaces such as HDMI 2.0, 10-gigabit Ethernet, and USB 3.0.

RClamp7534P is a bi-directional device designed to provide extremely low clamping voltage for both positive and negative ESD pulses. With a typical dynamic resistance of 1.0 Ohm, the RClamp7534P turns on quickly during overvoltage events to protect sensitive systems.

RClamp7534P is in a 5-pin SGP2010N5 package measuring 2.0 x 1.0mm with a nominal height of 0.50mm. The leads have a nominal pin-to-pin pitch of 0.40mm. Flow-through package design simplifies PCB layout and maintains signal integrity on high-speed lines. The combination of low peak ESD clamping, low dynamic resistance, and innovative package design enables this device to provide the highest level of ESD protection.

Features

- ◆ ESD protection for high-speed data lines to **IEC 61000-4-2 (ESD) $\pm 25\text{kV}$ (air), $\pm 20\text{kV}$ (contact)**
- ◆ **IEC 61000-4-5 (Lightning) 4A (8/20 μ s)**
- ◆ **IEC 61000-4-4 (EFT) 40A (5/50ns)**
- ◆ Package design optimized for high speed lines
- ◆ Protects four high-speed lines
- ◆ Low capacitance: 0.19pF Typical (I/O to Ground)
- ◆ Low ESD clamping voltage
- ◆ Low dynamic resistance: 1.0 Ohm (Typ)
- ◆ Low leakage current
- ◆ Solid-state silicon-avalanche technology

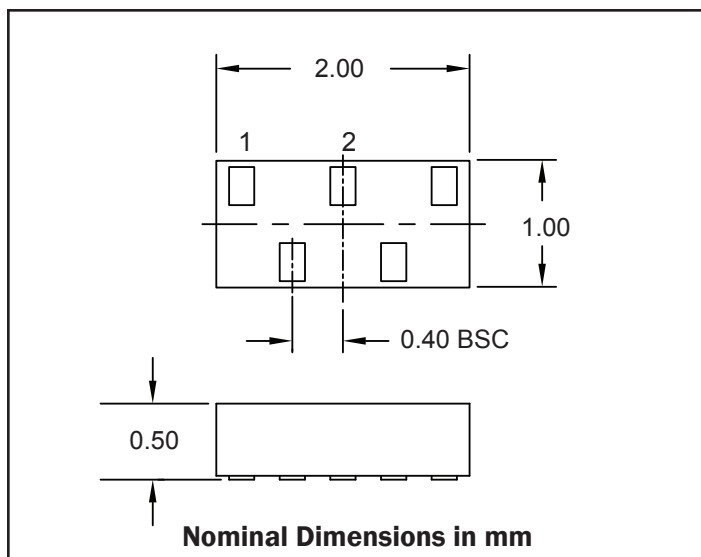
Mechanical Characteristics

- ◆ SGP2010N5 5-pin package (2.0 x 1.0 x 0.50mm)
- ◆ Pb-Free, Halogen Free, RoHS/WEEE Compliant
- ◆ Lead Finish: NiPdAu
- ◆ Marking: Marking code
- ◆ Packaging: Tape and Reel

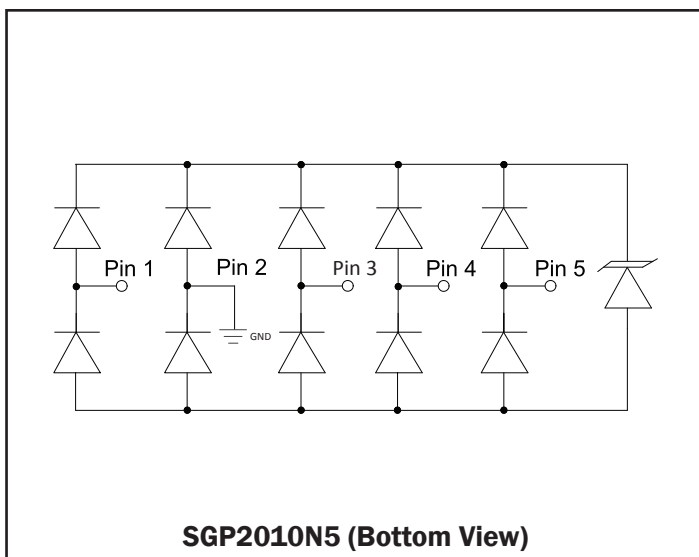
Applications

- ◆ HDMI 2.0
- ◆ USB 3.1
- ◆ Display Port 1.2
- ◆ Thunderbolt
- ◆ 10GbE
- ◆ V-By-One
- ◆ MHL

Package Dimensions



Circuit Diagram



PROTECTION PRODUCTS

Absolute Maximum Ratings

Rating	Symbol	Value	Units
Peak Pulse Current (tp = 8/20μs)	I _{PP}	4	A
ESD per IEC 61000-4-2 (Air) ⁽¹⁾ ESD per IEC 61000-4-2 (Contact) ⁽¹⁾	V _{ESD}	±25 ±20	kV
Operating Temperature	T _J	-40 to +85	°C
Storage Temperature	T _{STG}	-55 to +150	°C

Electrical Characteristics (T=25°C unless otherwise specified)

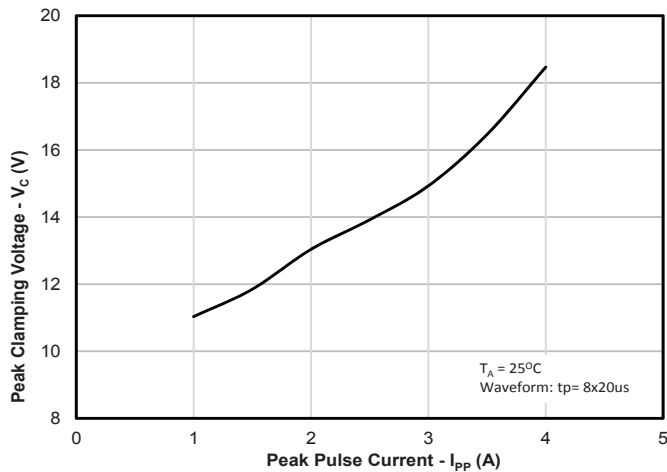
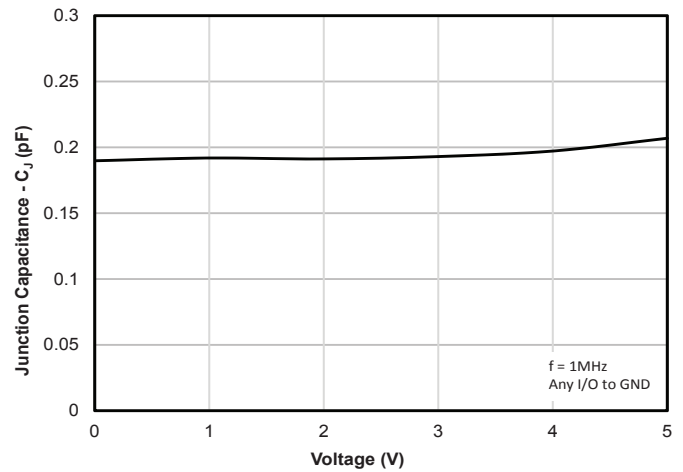
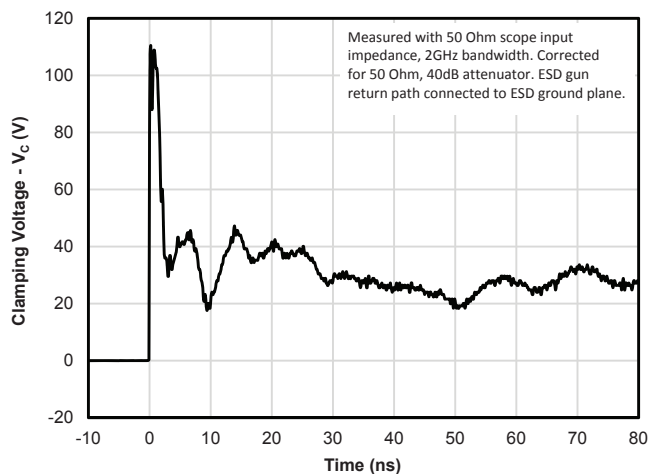
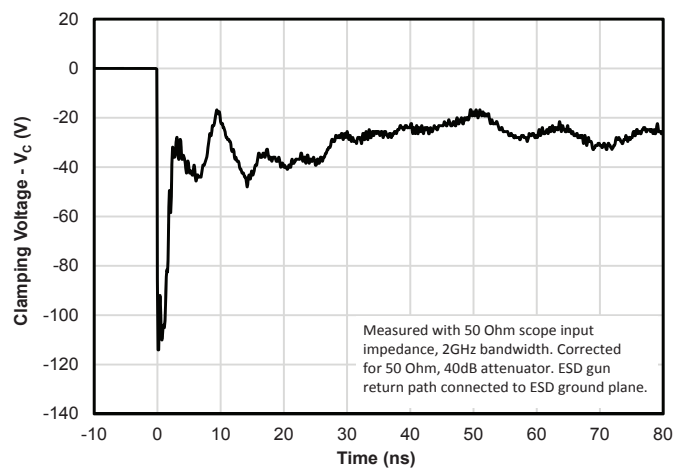
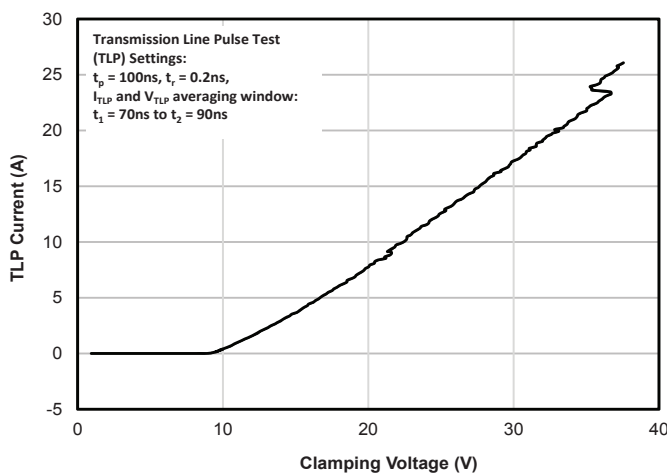
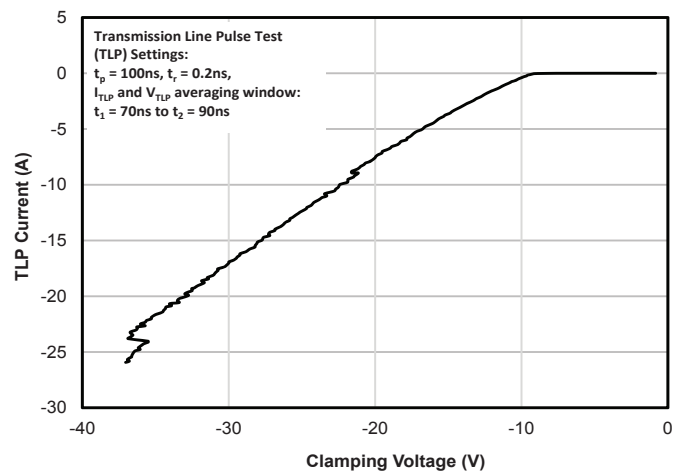
Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Stand-Off Voltage	V _{RWM}	Any I/O to Ground			5	V
Reverse breakdown Voltage	V _{BR}	I _{BR} = 1mA Any I/O to Ground	6.5	9.7	11.5	V
Reverse Leakage Current	I _R	V _{RWM} = 5V Any I/O to Ground		5	100	nA
Clamping Voltage	V _C	I _{PP} = 1A, tp = 8/20μs			15	V
		I _{PP} = 4A, tp = 8/20μs			25	V
ESD Clamping Voltage ²	V _C	I _{PP} = 4A tp = 0.2/100ns		14		V
ESD Clamping Voltage ²	V _C	I _{PP} = 16A tp = 0.2/100ns		24		V
Dynamic Resistance ^{2, 3}	R _{DYN}	tp = 100ns		1.0		Ohms
Junction Capacitance	C _J	I/O pin to GND f = 1MHz		0.19	0.22	pF

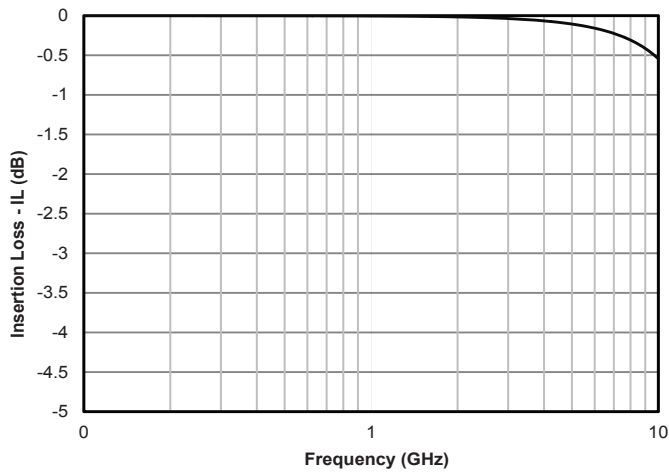
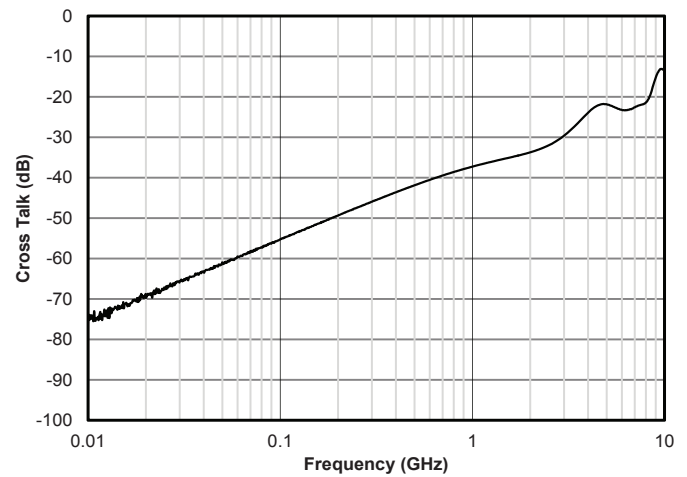
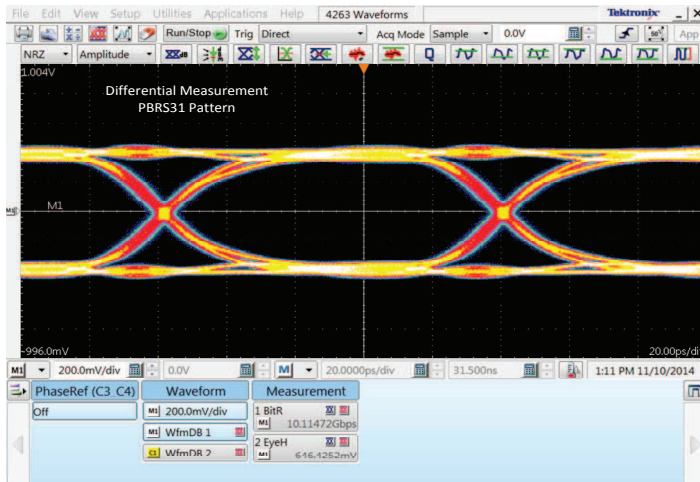
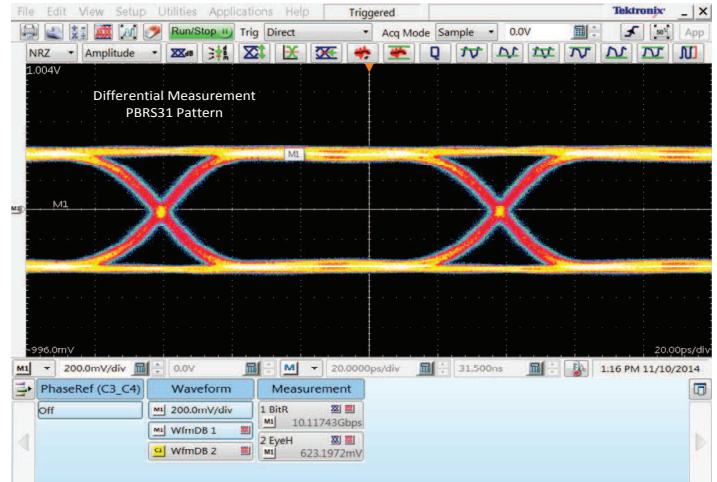
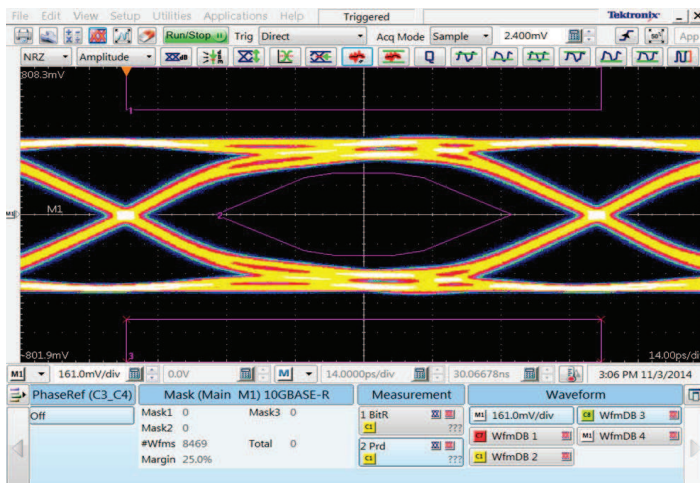
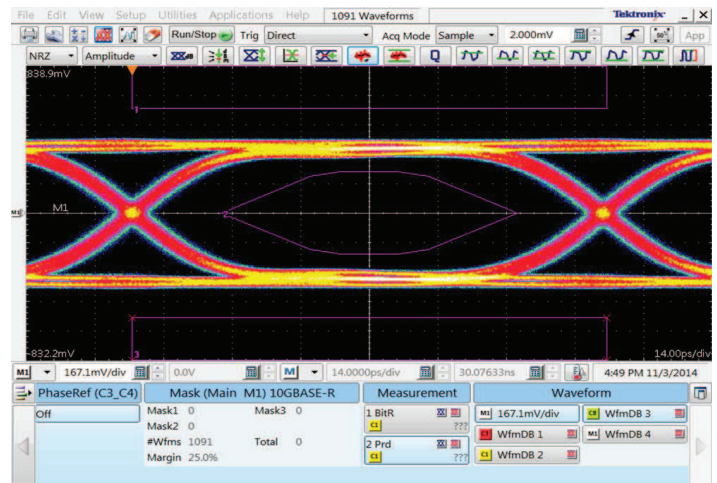
Notes

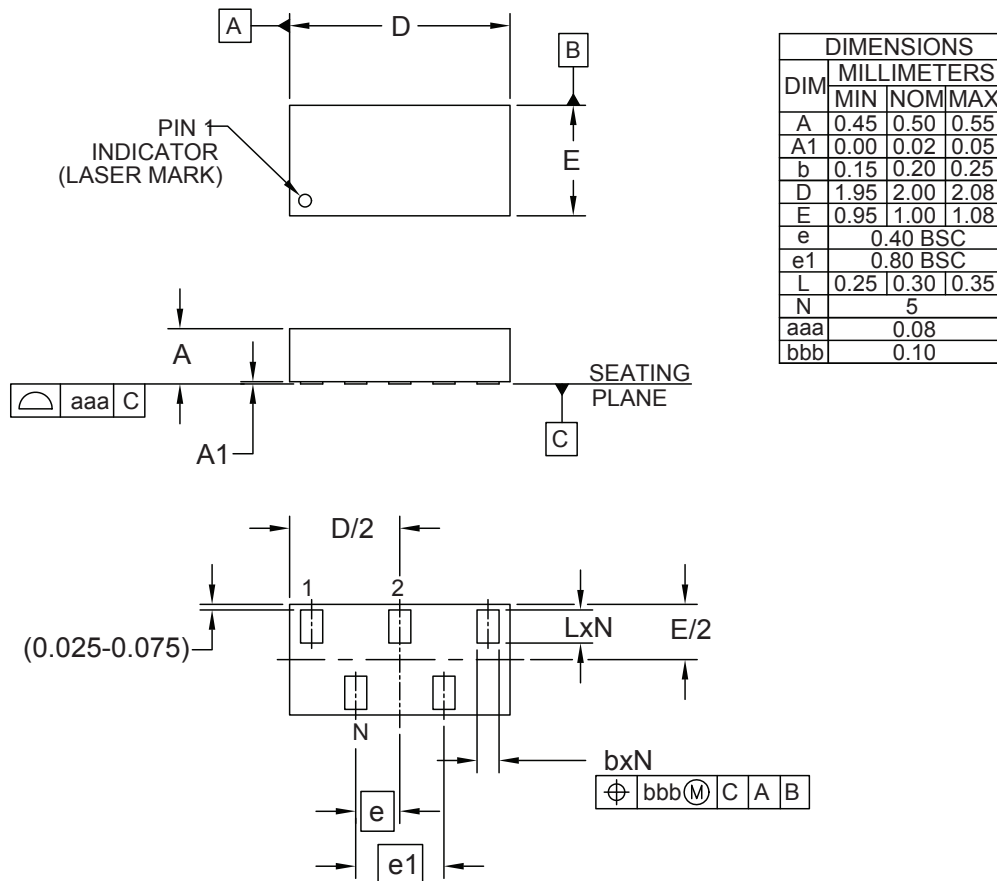
1) Measured with a 20dB attenuator, 50 Ohm scope input impedance, 2GHz bandwidth. ESD gun return path connected to ESD ground plane.

2) Transmission Line Pulse Test (TLP) Settings: tp = 100ns, tr = 0.2ns, I_{TLP} and V_{TLP} averaging window: t1 = 70ns to t2 = 90ns.

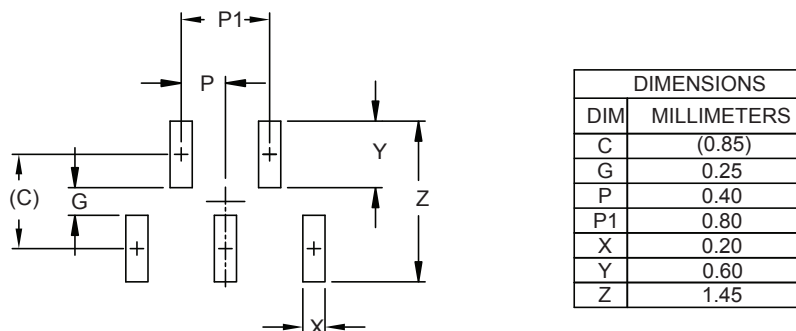
3) Dynamic resistance calculated from I_{TLP} = 4A to I_{TLP} = 16A

PROTECTION PRODUCTS
Typical Characteristics
Clamping Voltage vs. Peak Pulse Current

Junction Capacitance vs. Reverse Voltage

ESD Clamping (8kV Contact per IEC 61000-4-2)

ESD Clamping (-8kV Contact per IEC 61000-4-2)

TLP Characteristic (Positive Pulse)

TLP Characteristic (Negative Pulse)


PROTECTION PRODUCTS
Typical Characteristics
Insertion Loss (S21)

Analog Crosstalk

10Gb/s (USB 3.1) Eye Diagram with RClamp7534P

10Gb/s (USB 3.1) Eye Diagram without RClamp7534P

10GbE Eye Diagram with RClamp7534P

10GbE Eye Diagram without RClamp7534P


PROTECTION PRODUCTS
Outline Drawing - SGP2010N5

NOTES:


1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).

Land Pattern - SGP2010N5

NOTES:

1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
2. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY.
CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR
COMPANY'S MANUFACTURING GUIDELINES ARE MET.

PROTECTION PRODUCTS

Marking



Notes: Device is Electrically Symmetrical

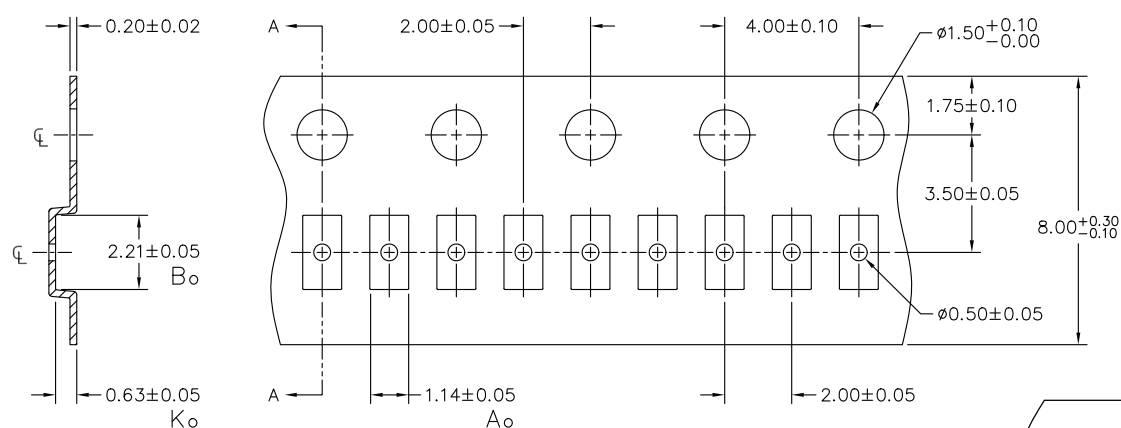
Ordering Information

Part Number	Qty per Reel	Reel Size
RClamp7534P.TNT	10000	7"

Notes:


- 1) Lead finish is lead-free NiPdAu.
- 2) RailClamp and RClamp are trademarks of Semtech Corporation.

Tape and Reel Specification



SECTION A-A

NOTE: ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.



Device Orientation in Tape

Contact Information

Semtech Corporation
Protection Products Division
200 Flynn Rd., Camarillo, CA 93012
Phone: (805)498-2111 FAX (805)498-3804



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.