


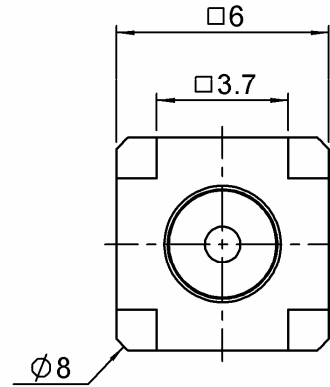


STRAIGHT FEMALE RECEPTACLE FOR PCB


R113A.424.020

SMT TYPE - REEL OF 500

Series : **MCX**

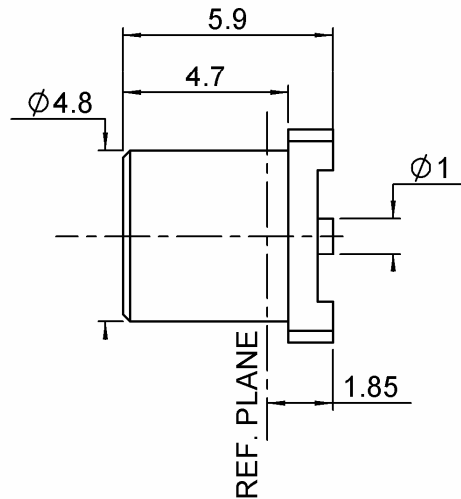

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	GOLD
CENTER CONTACT	BERYLLIUM COPPER	GOLD
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0927 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL

STRAIGHT FEMALE RECEPTACLE FOR PCB**R113A.424.020****SMT TYPE - REEL OF 500**Series : **MCX****PACKAGING**

Standard	Unit	Other
500	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.3 + 0.0000	x F(GHz) Maxi
Insertion loss	0.102	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	170	Veff Maxi
Dielectric withstanding voltage	750	Veff mini
Insulation resistance	1000	M Ω mini

ENVIRONMENTAL

Operating temperature	-40/+85	$^{\circ}$ C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

OTHER CHARACTERISTICS

Assembly instruction

Others :

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	10 N mini
Torque	NA N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	100 Cycles mini
Weight	0.6000 g


Issue : 0927 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 

STRAIGHT FEMALE RECEPTACLE FOR PCB**R113A.424.020****SMT TYPE - REEL OF 500****Series : MCX****SOLDER PROCEDURE**

1. Deposit solder paste 'Sn Ag4 Cu0.5' on mounting zone by screen printing application.
We recommend a low residue flux. We advise a thickness of 150 microns mini. (.006 inch mini).
Verify that the edges of the zone are clean.
2. Placement of the receptacle on the mounting zone with an automatic machine of 'pick and place' type. Aspiration port (see page 4) centered into body and push against it.
A video camera is recommended for positioning of the component . Adhesive agents must not be used on the receptacle.
3. Soldering by infra-red reflow.
Below please find ,the typical profile to use.
4. Cleaning of printed circuit boards.
5. Verification of solder joints and position of the component by visual inspection.

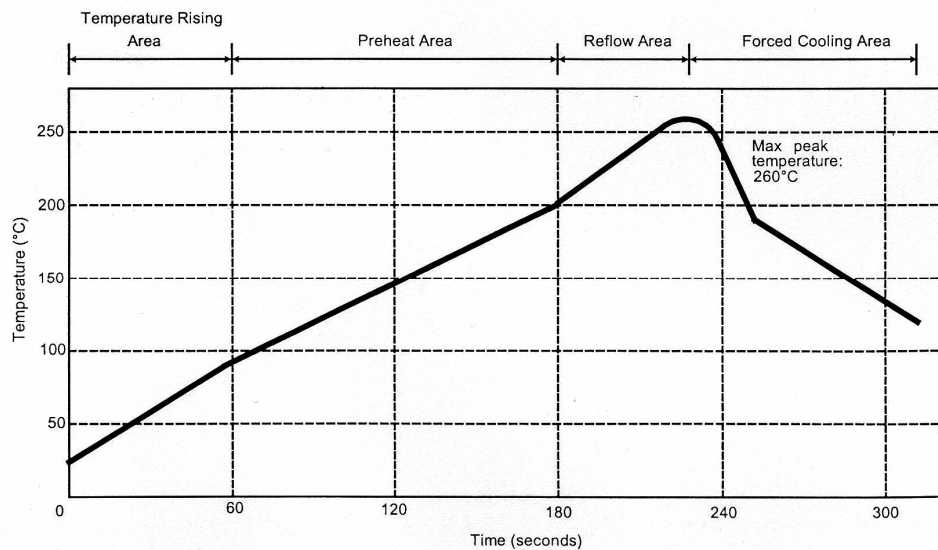TEMPERATURE PROFIL

Parmeter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec



Issue : 0927 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIALL


STRAIGHT FEMALE RECEPTACLE FOR PCB**SMT TYPE - REEL OF 500****R113A.424.020**

Series : MCX

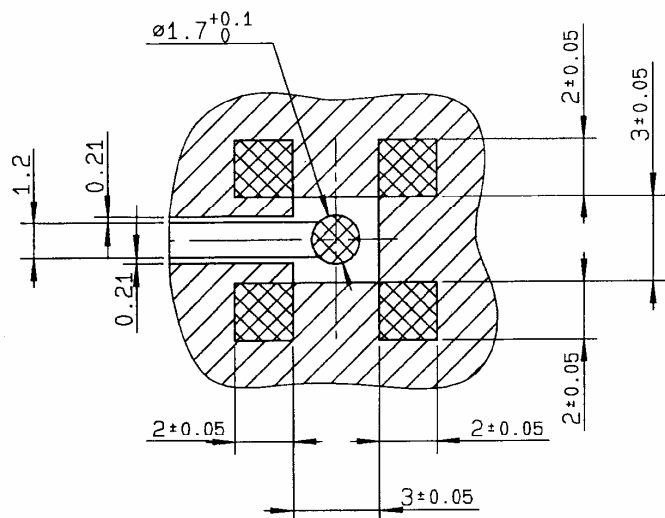**ASPIRATION PORT**

DIA $0.112^{+0.002}_0$
 ($\phi 2.85^{+0.05}_0$)
 DIA $0.132^{+0.0012}_0$
 ($\phi 3.35^{+0.03}_0$)

COPLANAR LINE

Pattern and signal are on the same side

Thickness of PCB : .063 (1.6 mm)

The material of PCB is the epoxy resin of glass fabrics bacs. (Er = 4.8)


The solder resist should be printed except for the land pattern on the PCB.



Pattern



Land for solder paste

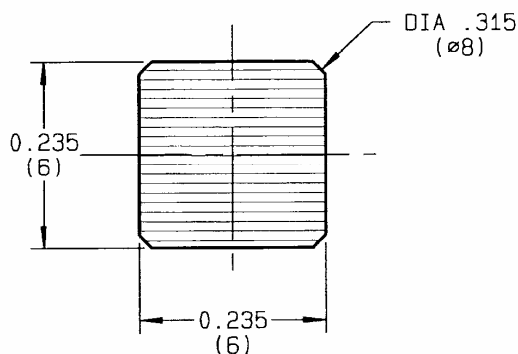SHADOW OF MCX RECEPTACLE FOR VIDEO CAMERA


Issue : 0927 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL

STRAIGHT FEMALE RECEPTACLE FOR PCB**SMT TYPE - REEL OF 500****R113A.424.020**

Series : MCX

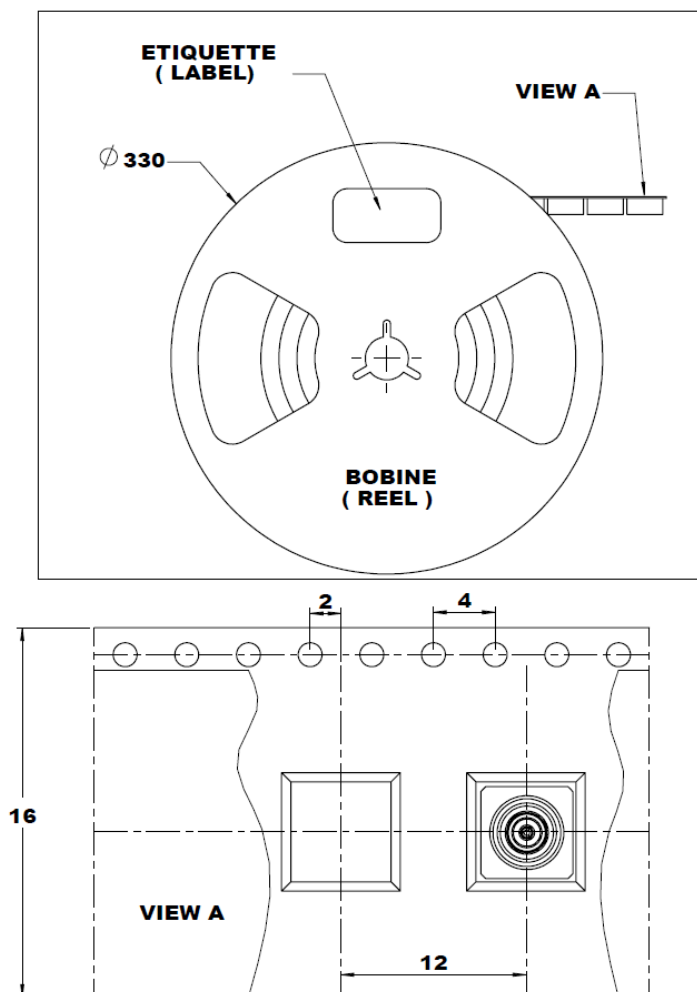PACKAGE**Issue : 0927 A**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.