

## Metal Film Resistors

# High Power & Flame-Proof Type

## Ultra Miniature Style [ FMP Series ]



### INTRODUCTION


The FMP Series Metal Film High Power Resistors are manufactured using a vacuum sputtering system to deposit multiple layers of mixed metal alloys and passivative materials onto a carefully treated high grade ceramic substrate. After a helical groove has been cut in the resistive layer; tinned connecting leads of electrolytic copper are welded to the end-caps. The resistors are coated with layers of pink color lacquer.

### FEATURES

|  |                      |
|--|----------------------|
| Power Rating                           | 1/2W, 1W, 2W, 3W, 4W |
| Resistance Tolerance                   | ±1%, ±5%             |
| T.C.R.                                 | ±100ppm/°C           |
| Flameproof Multi-layer Coating Meets   | UL-94V-0             |
| Flameproof Feature Meets Overload Test | UL-1412              |


### DERATING CURVE

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with the curve below.

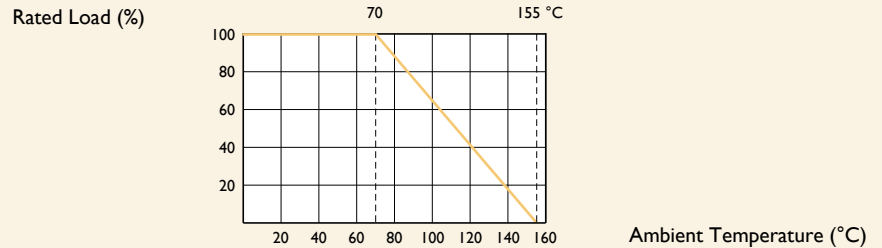

### DIMENSIONS

Unit: mm



| STYLE                  | DIMENSION |         |        |           |
|------------------------|-----------|---------|--------|-----------|
|                        | L         | øD      | H      | ød        |
| <b>Ultra Miniature</b> |           |         |        |           |
| FMP-50                 | 3.4±0.3   | 1.9±0.2 | 28±2.0 | 0.45±0.05 |
| FMP100                 | 6.3±0.5   | 2.4±0.2 | 28±2.0 | 0.55±0.05 |
| FMP200                 | 9.0±0.5   | 3.9±0.3 | 26±2.0 | 0.55±0.05 |
| FMP3WS                 | 11.5±1.0  | 4.5±0.5 | 35±2.0 | 0.8±0.05  |
| FMP300                 | 15.5±1.0  | 5.0±0.5 | 33±2.0 | 0.8±0.05  |
| FMP4WV                 | 17.0±1.0  | 7.5±0.5 | 32±2.0 | 0.8±0.05  |

Note:

## ELECTRICAL CHARACTERISTICS

| STYLE                       | FMP-50                                    | FMP100 | FMP200 | FMP3WS | FMP300 | FMP4WV |
|-----------------------------|---|--------|--------|--------|--------|--------|
| Power Rating at 70°C        | 1/2W                                      | 1W     | 2W     | 3W     |        | 4W     |
| Maximum Working Voltage     | 200V                                      | 350V   | 500V   |        | 750V   |        |
| Maximum Overload Voltage    | 400V                                      | 600V   | 700V   |        | 1,000V |        |
| Voltage Proof on Insulation | 300V                                      | 500V   |        |        |        |        |
| Resistance Range            | 1Ω - 10MΩ & 0Ω for E24 & E96 series value |        |        |        |        |        |
| Operating Temp. Range       | -55°C to +155°C                           |        |        |        |        |        |
| Temperature Coefficient     | ±100ppm/°C                                |        |        |        |        |        |

Note: Special value is available on request

## ENVIRONMENTAL CHARACTERISTICS

| PERFORMANCE TEST              | TEST METHOD   | APPRAISE                                  |
|-------------------------------|---|---|
| Short Time Overload           | IEC 60115-1 4.13 2.5 times RCWV for 5 Sec.  | ±0.5%+0.05Ω                               |
| Voltage Proof on Insulation   | IEC 60115-1 4.7 in V-block for 60 Sec., test voltage by type                      | By type                                   |
| Temperature Coefficient       | IEC 60115-1 4.8 -55°C to +155°C   | By type                                   |
| Insulation Resistance         | IEC 60115-1 4.6 in V-block for 60 Sec.  | >1,000MΩ                                  |
| Solderability                 | IEC 60115-1 4.17 235±5°C for 3±0.5 Sec.   | 95% Min. coverage                         |
| Solvent Resistance of Marking | IEC 60115-1 4.30 IPA for 5±0.5 Min. with ultrasonic                               | No deterioration of coatings and markings |
| Robustness of Terminations    | IEC 60115-1 4.16 Direct load for 10 Sec. in the direction of the terminal leads   | ≥2.5kg (24.5N)                            |
| Periodic-pulse Overload       | IEC 60115-1 4.39 4 times RCWV 10,000 cycles (1 Sec. on, 25 Sec. off)              | ±1.0%+0.05Ω                               |
| Damp Heat Steady State        | IEC 60115-1 4.24 40±2°C, 90-95% RH for 56 days, loaded with 0.1 times RCWV        | ±2.0%+0.05Ω                               |
| Endurance at 70°C             | IEC 60115-1 4.25 70±2°C at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)           | ±2.0%+0.05Ω                               |
| Temperature Cycling           | IEC 60115-1 4.19 -55°C ⇌ Room Temp. ⇌ +155°C ⇌ Room Temp. (5 cycles)              | ±1.0%+0.05Ω                               |
| Resistance to Soldering Heat  | IEC 60115-1 4.18 260±3°C for 10±1 Sec., immersed to a point 3±0.5mm from the body | ±0.25%+0.05Ω                              |
| Accidental Overload Test      | IEC 60115-1 4.26 4 times RCWV for 1 Min.  | No evidence of flaming or arcing          |

Note: RCWV(Rated Continuous Working Voltage) =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$  or Max. working voltage listed above, whichever less.

Revision: 201304



## EXPLANATIONS OF ORDERING CODE

| <b>MFR</b>                                    | <b>-12</b>   | <b>F</b>   | <b>T</b>  | <b>F</b>  | <b>52-</b>  | <b>100R</b>  |
|---|--|--|---|---|---|--|
| Code 1 - 3<br><b>Series Name</b><br>See Index | Code 4 - 6<br><b>Power Rating</b><br>-05 = $\varnothing$ d0.5mm<br>-06 = $\varnothing$ d0.6mm<br>-07 = $\varnothing$ d0.7mm<br>-08 = $\varnothing$ d0.8mm<br>-10 = $\varnothing$ d1.0mm<br>-14 = $\varnothing$ d1.4mm<br>-12 = 1/6W<br>-25 = 1/4W<br>25S = 1/4WS<br>-50 = 1/2W<br>50S = 1/2WS<br>100 = 1W<br>1WS = 1WS<br>200 = 2W<br>2WS = 2WS<br>204 = 0.4W<br>207 = 0.6W<br>300 = 3W<br>3WS = 3WS<br>3WM = 3WM<br>400 = 4W<br>500 = 5W<br>5WS = 5WS<br>5SS = 5WSS<br>700 = 7W<br>7WS = 7WS<br>10A = 10W<br>20A = 20W<br>30A = 30W<br>40A = 40W<br>50A = 50W<br>10S = 10WS<br>15A = 15W<br>25A = 25W<br>10B = 100W<br>25B = 250W | Code 7<br><b>Tolerance</b><br>P = $\pm 0.02$ %<br>A = $\pm 0.05$ %<br>B = $\pm 0.1$ %<br>C = $\pm 0.25$ %<br>D = $\pm 0.5$ %<br>F = $\pm 1$ %<br>G = $\pm 2$ %<br>J = $\pm 5$ %<br>K = $\pm 10$ %<br>- = Base on Spec. | Code 8<br><b>Packing Style</b><br>T = Tape/Box<br>R = Tape/Reel<br>B = Bulk | Code 9<br><b>Temperature Coefficient of Resistance</b><br>- = Base on Spec.<br>A = $\pm 5$ ppm/ $^{\circ}$ C<br>B = $\pm 10$ ppm/ $^{\circ}$ C<br>C = $\pm 15$ ppm/ $^{\circ}$ C<br>S = $\pm 20$ ppm/ $^{\circ}$ C<br>D = $\pm 25$ ppm/ $^{\circ}$ C<br>E = $\pm 50$ ppm/ $^{\circ}$ C<br>F = $\pm 100$ ppm/ $^{\circ}$ C<br>G = $\pm 200$ ppm/ $^{\circ}$ C<br>H = $\pm 250$ ppm/ $^{\circ}$ C<br>I = $\pm 300$ ppm/ $^{\circ}$ C<br>J = $\pm 350$ ppm/ $^{\circ}$ C | Code 10 - 12<br><b>Forming Type</b><br>26- = 26mm<br>52- = 52.4mm<br>73- = 73mm<br>81- = 81mm<br>91- = 91mm<br>F = F Type<br>FK = FK Type<br>FKK = FKK Type<br>FFK = F-form Kink<br>M = M-Type Forming<br>MB = M-form W/flat<br>MT = MT Type Forming<br>MR = MR Type<br>AV = AVIsert<br>PN = PANAsert | Code 13 - 17<br><b>Resistance Value</b><br>0R1 = 0.1<br>100R = 100<br>10K = 10,000<br>10M = 10,000,000 |

### EXCEPTION:

#### • Cement series:

<Code 8>: Special packing style code

B: Bulk with wirewound or metal oxide sub-assembly for resistance value

W: Bulk with ceramic based wirewound sub-assembly for resistance value

M: Bulk with metal oxide sub-assembly for resistance value

F: Bulk with Fiberglass based wirewound sub-assembly for resistance value

<Code 10-12>: Without forming code

Example: **SQP500JB-10R**

#### • JPW series:

<Code 13-17>: without resistance value code

Example: **JPW-06-T-52-**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.