

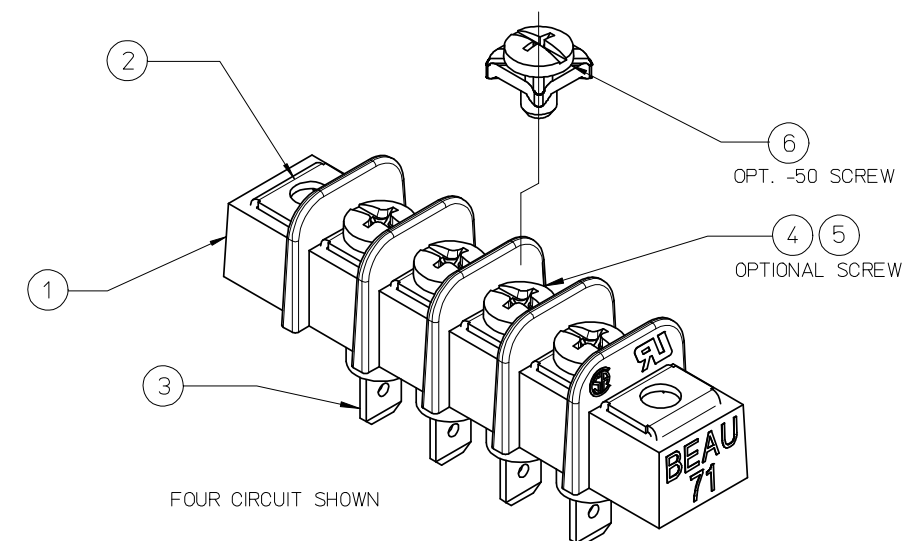


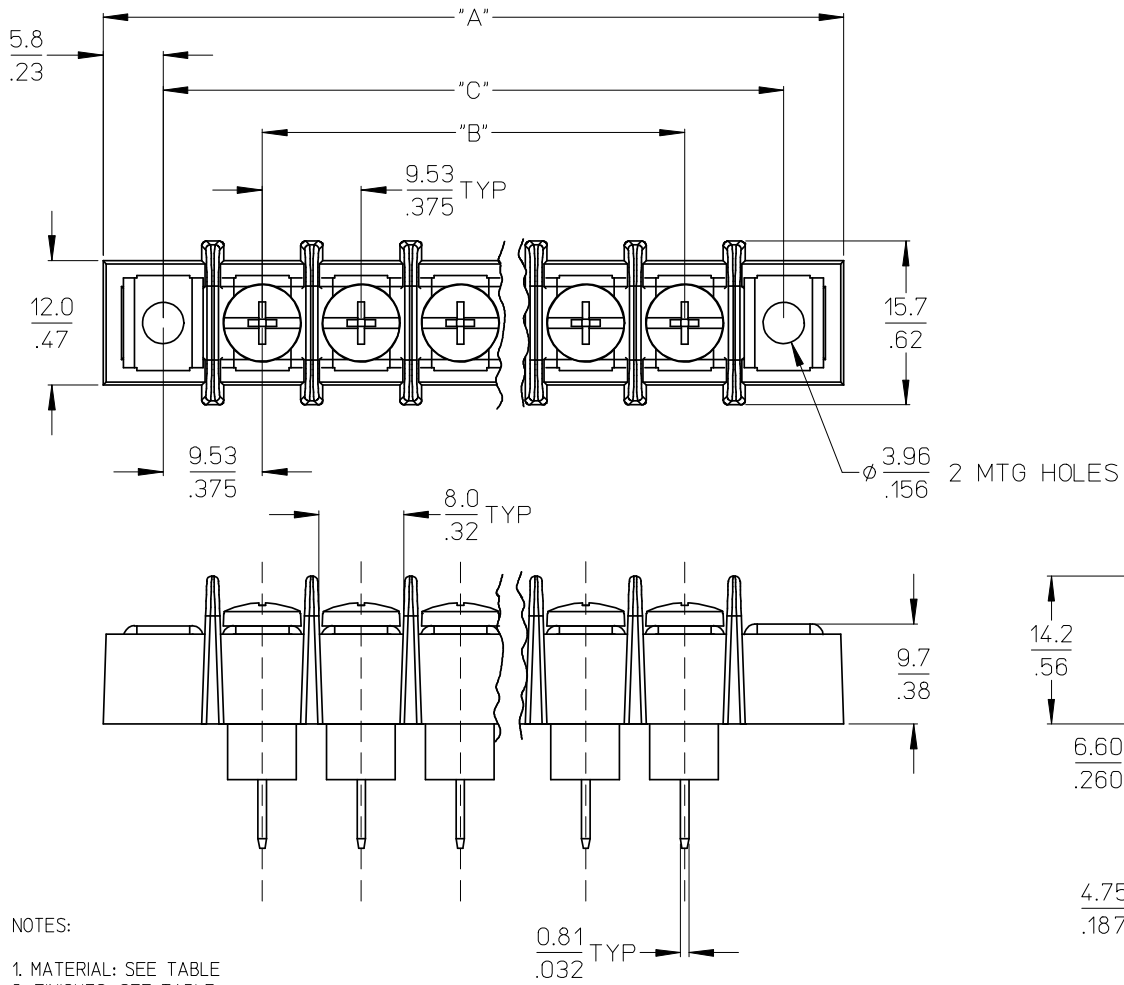

- NOTES:
- 1. MATERIAL: SEE TABLE
 - 2. FINISHES: SEE TABLE
 - 3. PRODUCT SPECIFICATION: NOT REQUIRED
 - 4. "XX" REFERS TO NUMBER OF CIRCUITS.
 - 5. ASSEMBLY IS ROHS COMPLIANT.

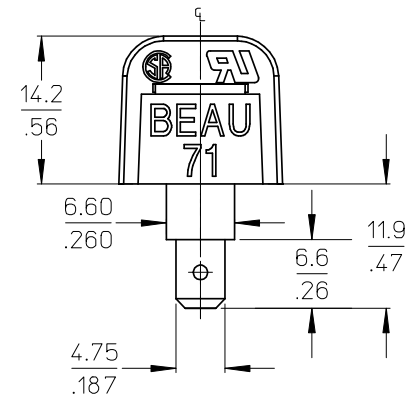

					INITIAL RELEASE EC NO: WNA2008-0180 DRWN: JENCINAS 2008/05/16 CHKD: CYORK 2008/05/21 APPR: JMACNEIL 2008/05/22 A	DESCRIPTION ▽=0 ▽=0 REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
6	XX	#6-32 PH/SLOTTED SCREW W/ WASHER (OPT -50)	STEEL	ZN, CLEAR CHROMATE				4 PLACES	mm ± ---	INCH ± ---	DRAWN BY J. ENCINAS	DATE 2008/04/03	TITLE 9.53MM/.375 SINGLE ROW BTS ASSY, LOW PROFILE INSUL. FT, W/MTG					
5	XX	#6-32 PH/SLOTTED SCREW (OPT -49)	BRASS	NICKEL PLATE				3 PLACES	mm ± ---	INCH ± .005	CHECKED BY C YORK	DATE 2008/04/04						
4	XX	#6-32 PH/SLOTTED SCREW (STANDARD)	STEEL	ZN, CLEAR CHROMATE				2 PLACES	mm ± 0.13	INCH ± .01	APPROVED BY J MACNEIL	DATE 2008/04/07						
3	XX	TERMINAL, FAST TAB	BRASS	TIN PLATE				1 PLACE	mm ± 0.3	INCH ± ---	ANGULAR ± 2 °		MATERIAL NO. SEE SHT. 2		DOCUMENT NO. SD-38711-004		SHEET NO. 1 OF 2	
2	2	MOUNTING PLATE	BRASS	NICKEL PLATE				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
1	1	INSULATOR	POLYESTER (PBT)	BLACK														
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH														
tb_frame_B_P_ME_T Rev. D 2004/04/02		9	8	7	6	5	4	3	2	1								

F

E

D

C

B

A

F

E

D

C

B

A

MATERIAL NO. (OPT -49)	MATERIAL NO. (OPT -50)	MATERIAL NO. (STANDARD)	NUMBER OF CIRCUITS "XX"	DIM. "A"	DIM. "B"	DIM. "C"
387117002	387117302	387116702	02	40.2 [1.58]	9.53 [.375]	28.6 [1.13]
387117003	387117303	387116703	03	49.7 [1.96]	19.05 [.750]	38.1 [1.50]
387117004	387117304	387116704	04	59.2 [2.33]	28.58 [1.125]	47.6 [1.88]
387117005	387117305	387116705	05	68.7 [2.71]	38.10 [1.500]	57.2 [2.25]
387117006	387117306	387116706	06	78.3 [3.08]	47.63 [1.875]	66.7 [2.63]
387117007	387117307	387116707	07	87.8 [3.46]	57.15 [2.250]	76.2 [3.00]
387117008	387117308	387116708	08	97.3 [3.83]	66.68 [2.625]	85.7 [3.38]
387117009	387117309	387116709	09	106.8 [4.21]	76.20 [3.000]	95.3 [3.75]
387117010	387117310	387116710	10	116.4 [4.58]	85.73 [3.375]	104.8 [4.13]
387117011	387117311	387116711	11	125.9 [4.96]	95.25 [3.750]	114.3 [4.50]
387117012	387117312	387116712	12	135.4 [5.33]	104.78 [4.125]	123.8 [4.88]
387117013	387117313	387116713	13	144.9 [5.71]	114.30 [4.500]	133.4 [5.25]
387117014	387117314	387116714	14	154.5 [6.08]	123.83 [4.875]	142.9 [5.63]
387117015	387117315	387116715	15	164.0 [6.46]	133.35 [5.250]	152.4 [6.00]
387117016	387117316	387116716	16	173.5 [6.83]	142.88 [5.625]	161.9 [6.38]
387117017	387117317	387116717	17	183.0 [7.21]	152.40 [6.000]	171.5 [6.75]
387117018	387117318	387116718	18	192.6 [7.58]	161.93 [6.375]	181.0 [7.13]
387117019	387117319	387116719	19	202.1 [7.96]	171.45 [6.750]	190.5 [7.50]
387117020	387117320	387116720	20	211.6 [8.33]	180.98 [7.125]	200.0 [7.88]
387117021	387117321	387116721	21	221.1 [8.71]	190.50 [7.500]	209.6 [8.25]
387117022	387117322	387116722	22	230.7 [9.08]	200.03 [7.875]	219.1 [8.63]
387117023	387117323	387116723	23	240.2 [9.46]	209.55 [8.250]	228.6 [9.00]
387117024	387117324	387116724	24	249.7 [9.83]	219.08 [8.625]	238.1 [9.38]
387117025	387117325	387116725	25	259.2 [10.21]	228.60 [9.000]	247.7 [9.75]
387117026	387117326	387116726	26	268.8 [10.58]	238.13 [9.375]	257.2 [10.13]

SEE SHEET 1

EC NO: WNA2008-0180

DRWN: JENCINAS

CHKD: CYORK

APPR: JMACNEIL

A

2008/05/16

2008/05/21

2008/05/22

DESCRIPTION

REV

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.3	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE

MM/IN

DRAWN BY	DATE
J. ENCINAS	2008/04/03
CHECKED BY	DATE
C. YORK	2008/04/04
APPROVED BY	DATE
J. MACNEIL	2008/04/07

MATERIAL NO.	SEE CHART
SIZE	B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

2:1

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

TITLE

9.53MM/.375 SINGLE ROW
BTS ASSY, LOW PROFILE
INSUL. FT, W/MTG

MOLEX

MOLEX INCORPORATED

DOCUMENT NO.	SHEET NO.
SD-38711-004	2 OF 2



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.