nichicon

UWX

5.5mmL Chip Type

For SMD | Anti-Solvent Feature

- Chip type with 5.5mm height.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Load life of 2000 hours at 85°C.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.

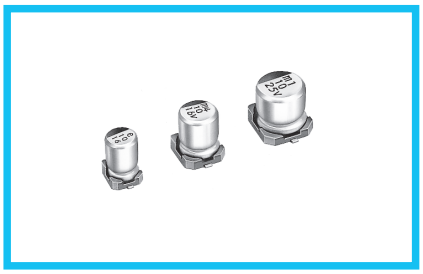



■Specifications

Item	Performance Characteristics
Category Temperature Range	−40 to +85°C
Rated Voltage Range	4 to 50V
Rated Capacitance Range	1 to 330μF
Capacitance Tolerance	±20% at 120Hz, 20°C
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA) ,whichever is greater.
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C Rated voltage (V): 4 / 6.3 / 10 / 16 / 25 / 35 / 50 tan δ (MAX.): 0.35 (0.40) / 0.26 (0.30) / 0.20 (0.24) / 0.16 (0.19) / 0.14 (0.16) / 0.12 (0.14) / 0.12 (0.14) Values in ( ) applicable to WR.
Stability at Low Temperature	Measurement frequency : 120Hz Rated voltage (V): 4 / 6.3 / 10 / 16 / 25 / 35 / 50 Impedance ratio ZT / Z20 (MAX.) Z−25°C / Z+20°C: 7 / 4 / 3 / 2 / 2 / 2 / 2 Impedance ratio ZT / Z20 (MAX.) Z−40°C / Z+20°C: 15 / 8 / 8 / 4 / 4 / 3 / 3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C. Capacitance change: Within ±20% of the initial capacitance value (Within ±25% for 4 V and WR series units) tan δ: 200% or less than the initial specified value Leakage Current: Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C. Capacitance change: Within ±10% of the initial capacitance value tan δ: Less than or equal to the initial specified value Leakage current: Less than or equal to the initial specified value
Marking	Black print on the case top.

■Chip Type

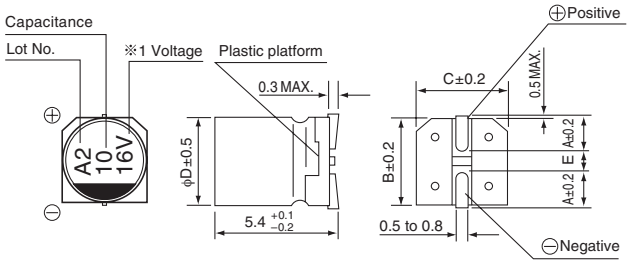

(mm)

φD	4	5	6.3	8
A	1.8	2.1	2.4	3.3
B	4.3	5.3	6.6	8.3
C	4.3	5.3	6.6	8.3
E	1.0	1.3	2.2	2.3

※1. Voltage mark for 6.3V is「6V」.

Type numbering system (Example : 16V 10μF)

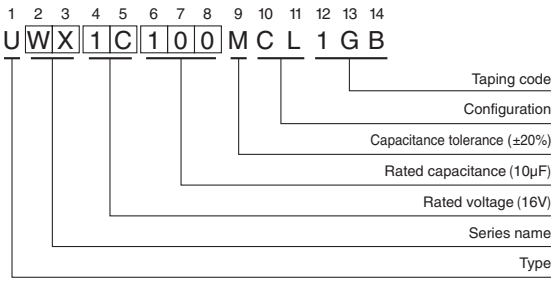

●Dimension table in next page.

UWX

■Dimensions

Cap. (μF) \ V	Code	4		6.3		10		16		25		35		50	
		0G		0J		1A		1C		1E		1V		1H	
1	010													4	8.4
2.2	2R2													4	13
3.3	3R3													4	17
4.7	4R7									4	16	4	18	●5	20 (18)
10	100							4	23	●5	27 (24)	●5	29 (24)	○6.3	33 (30)
22	220			4	28	● 5	33 (30)	●5	37 (30)	○6.3	42 (38)	○6.3	46 (39)	□8	52 (43)
33	330	4	28	●5	37 (34)	● 5	41 (34)	○6.3	49 (44)	○6.3	52 (46)	□8	62 (53)	8	71
47	470	4	33	●5	45 (40)	○ 6.3	52 (47)	○6.3	58 (52)	□8	70 (60)	8	80		
56	560	5	42	○6.3	52 (46)	○ 6.3	57 (50)	○6.3	63 (57)	□8	76 (65)				
100	101	5	56	○6.3	70 (47)	○ 6.3	76 (54)	6.3	86	8	110				
150	151	6.3	79	6.3	71	□ 8	111 (76)								
220	221	6.3	96	□8	110 (74)	8	135							Case size φD (mm)	Rated ripple
330	331	8	145	8	170										

Size φ4 is available for capacitors marked. " ● "
Size φ5 is available for capacitors marked. " ○ "
Size φ6.3 is available for capacitors marked. " □ "
} In such a case, WR will be put at 2nd and 3rd digit of type numbering system.

Rated ripple current (mArms) at 85°C 120Hz
( ) = UWR

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUR(p.168), UUG(p.174) if high C/V products are reqired.
- Please refer to page 3 for the minimum order quantity.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.