



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		B2	REVISED PER ECO-11-004587	11MAR11	RK	HMR


D

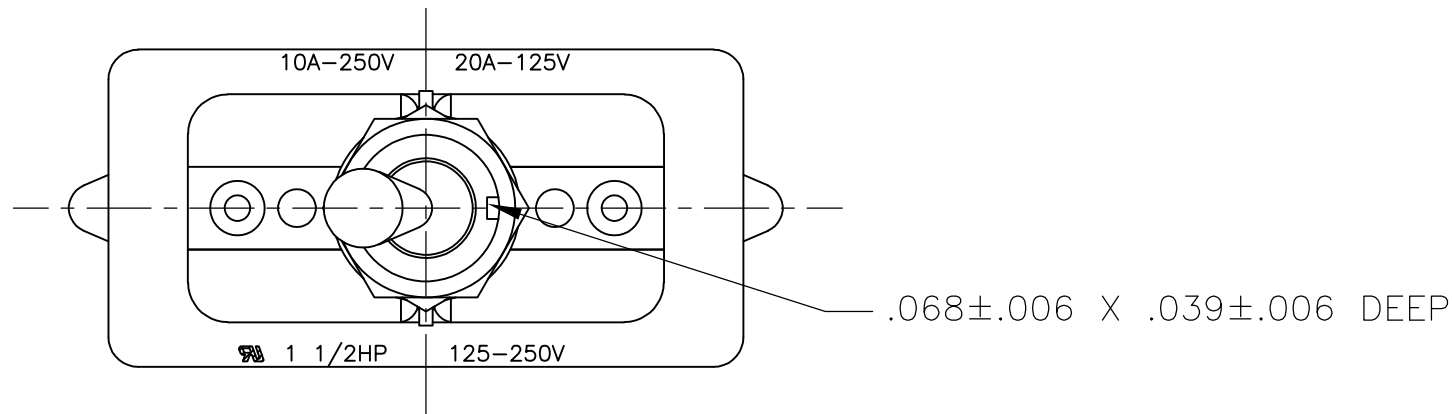



C

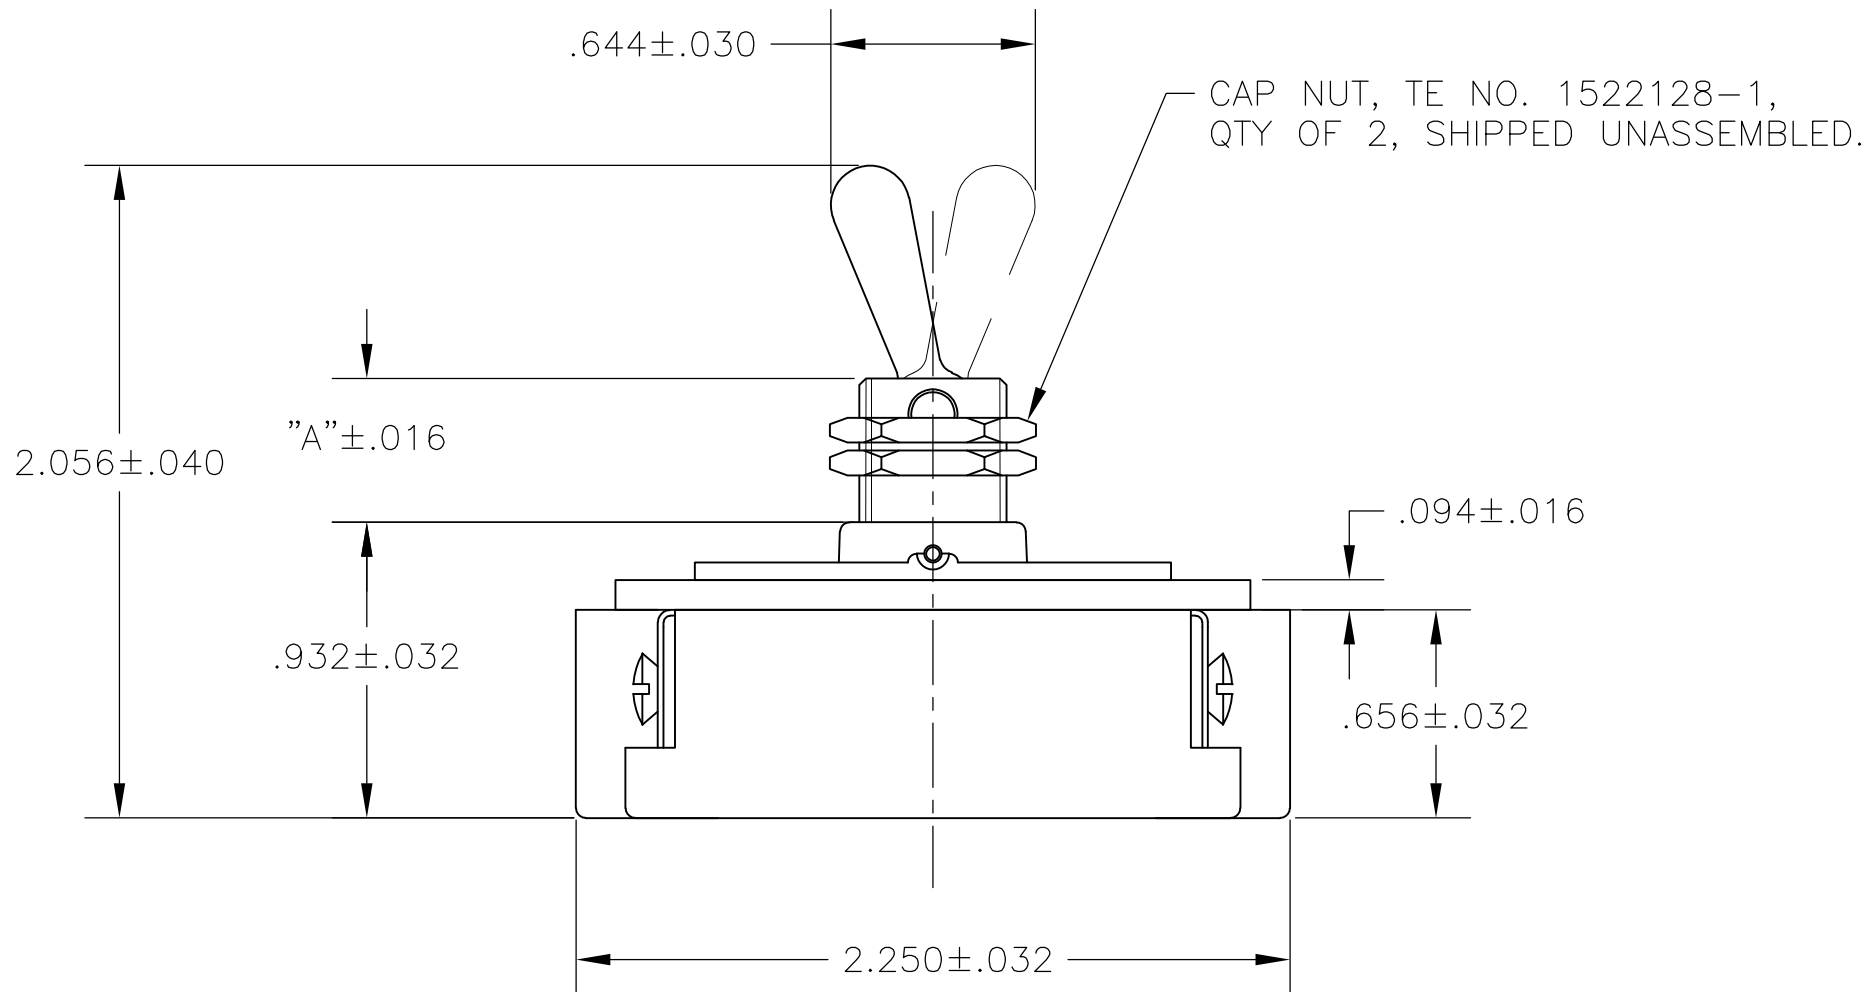

B

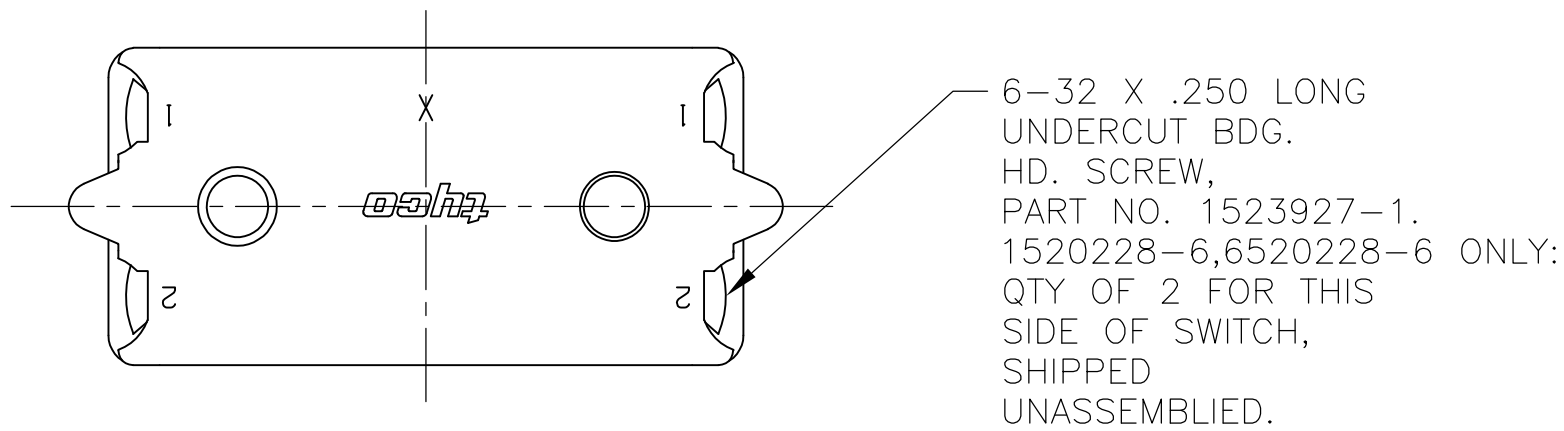



6-32 X .250 LONG UNDERCUT BDG. HD. SCREW, PART NO. 1523927-1. SWITCHES 1520228-1, 1520228-2, 1520228-3, 1-1520228-1, 2-1520228-3, 2-1520228-4, 6520228-1, 6520228-2, 6520228-3, 1-6520228-1, 2-6520228-3, 2-6520228-4: QTY OF 4, SHIPPED UNASSEMBLED. SWITCH 1-1520228-0, 1-6520228-0 ONLY: QTY OF 4, SHIPPED ASSEMBLED.

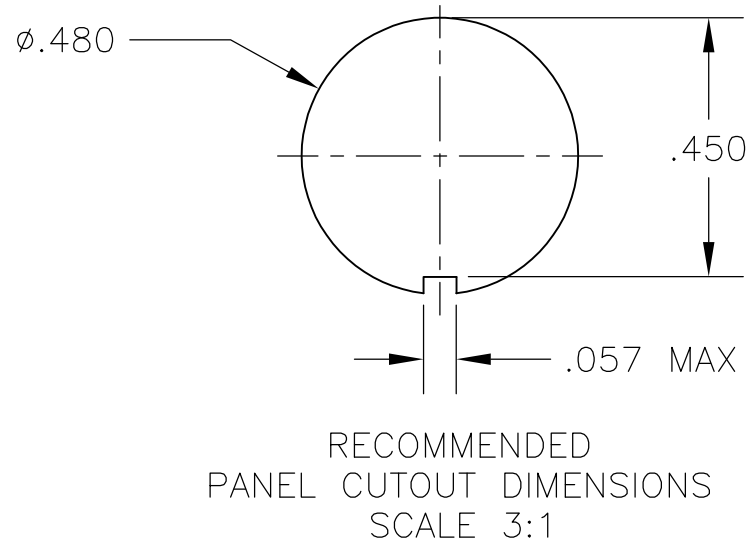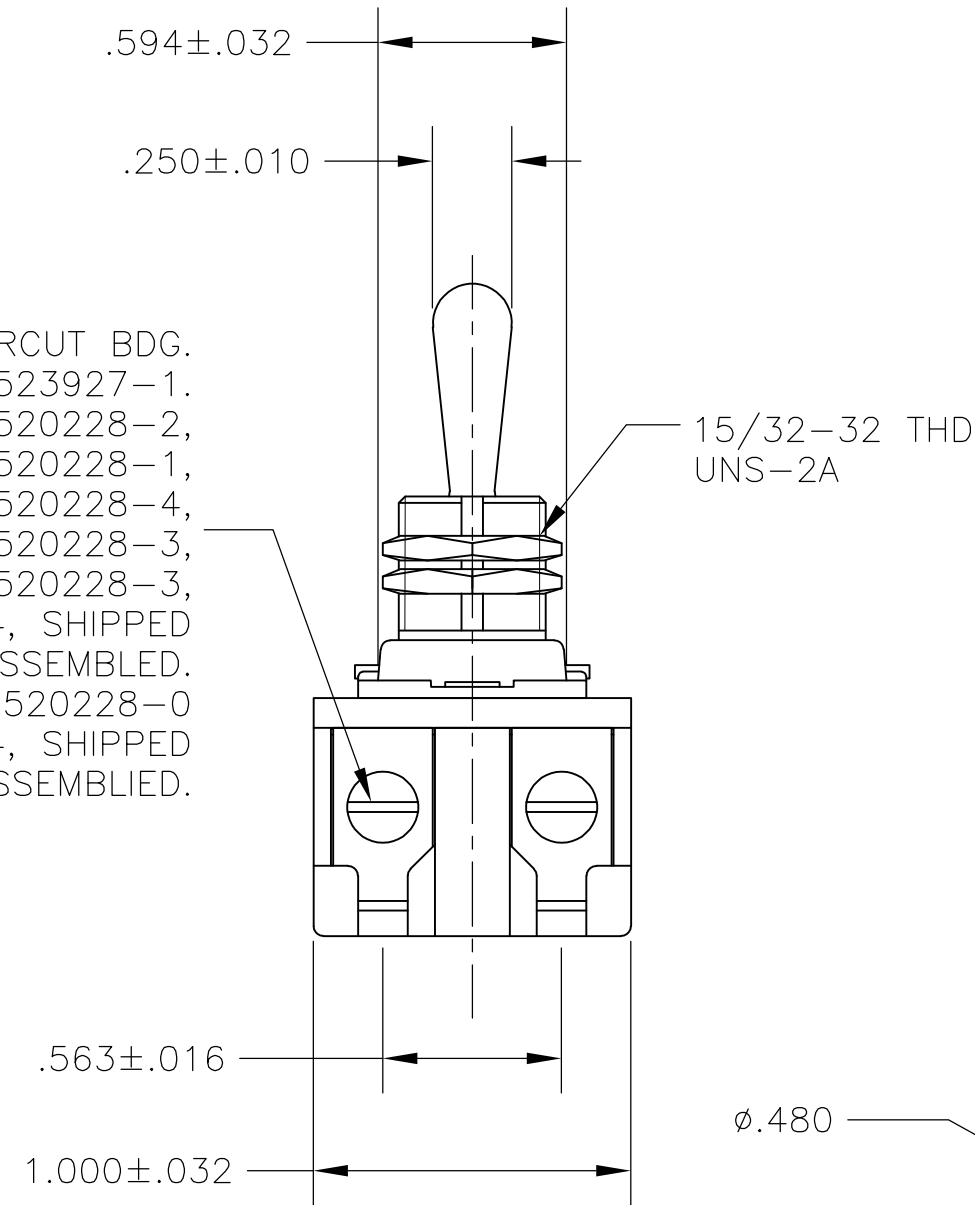



- 1 T-PAK – SWITCH AND HARDWARE INDIVIDUALLY PACKED IN PLASTIC BAGS BEFORE BEING PLACED IN A INTERMEDIATE BOX WHICH IS THEN PLACED IN A SHIPPING BOX. SEE TABLE.
- 2 P/N X-6520228-X IS ROHS COMPLIANT.
- 3 MOUNTING DIMENSIONS FOR REFERENCE ONLY.

2-1520228-4/2-6520228-4	7360K8 T-PAK	15/32" THD LENGTH DIE CAST	.469	DPST
2-1520228-3/2-6520228-3	7360K7 T-PAK	11/32" THD LENGTH DIE CAST	.344	DPST
1-1520228-1/1-6520228-1	8910K219	15/32" THD LENGTH DIE CAST	.469	DPST
1-1520228-0/1-6520228-0	8910K205	11/32" THD LENGTH DIE CAST	.344	DPST
1520228-6/6520228-6	7362K4	15/32" THD LENGTH DIE CAST	.469	SPST WITH BUSSING
1520228-3/6520228-3	7360K7	11/32" THD LENGTH DIE CAST	.344	DPST
1520228-2/6520228-2	7359K3	15/32" THD LENGTH DIE CAST	.469	DPST
1520228-1/6520228-1	7359K2	11/32" THD LENGTH DIE CAST	.344	DPST
PART NO.	ARAB NO.	BUSHING / PLATE ASSY	A	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN —	26SEP02	 TE Connectivity					
DIMENSIONS: INCHES		CHK —	—						
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —	NAME					
	0 PLC ± —		PRODUCT SPEC	20 AMP 125V AC/DC, 10 AMP 250V AC/DC,					
	1 PLC ± —		—	1 1/2 HP 125V/250V AC/DC, ONE HOLE MOUNTING					
	2 PLC ± —		APPLICATION SPEC	TOOL HANDLE TOGGLE SWITCH					
	3 PLC ± —		—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
4 PLC ± —		—	—	A2	00779	C=1520228	—		
ANGLES ± —		WEIGHT	—						
MATERIAL	FINISH	CUSTOMER DRAWING		SCALE	NTS	SHEET	1 of 4	REV	B2
—	—								

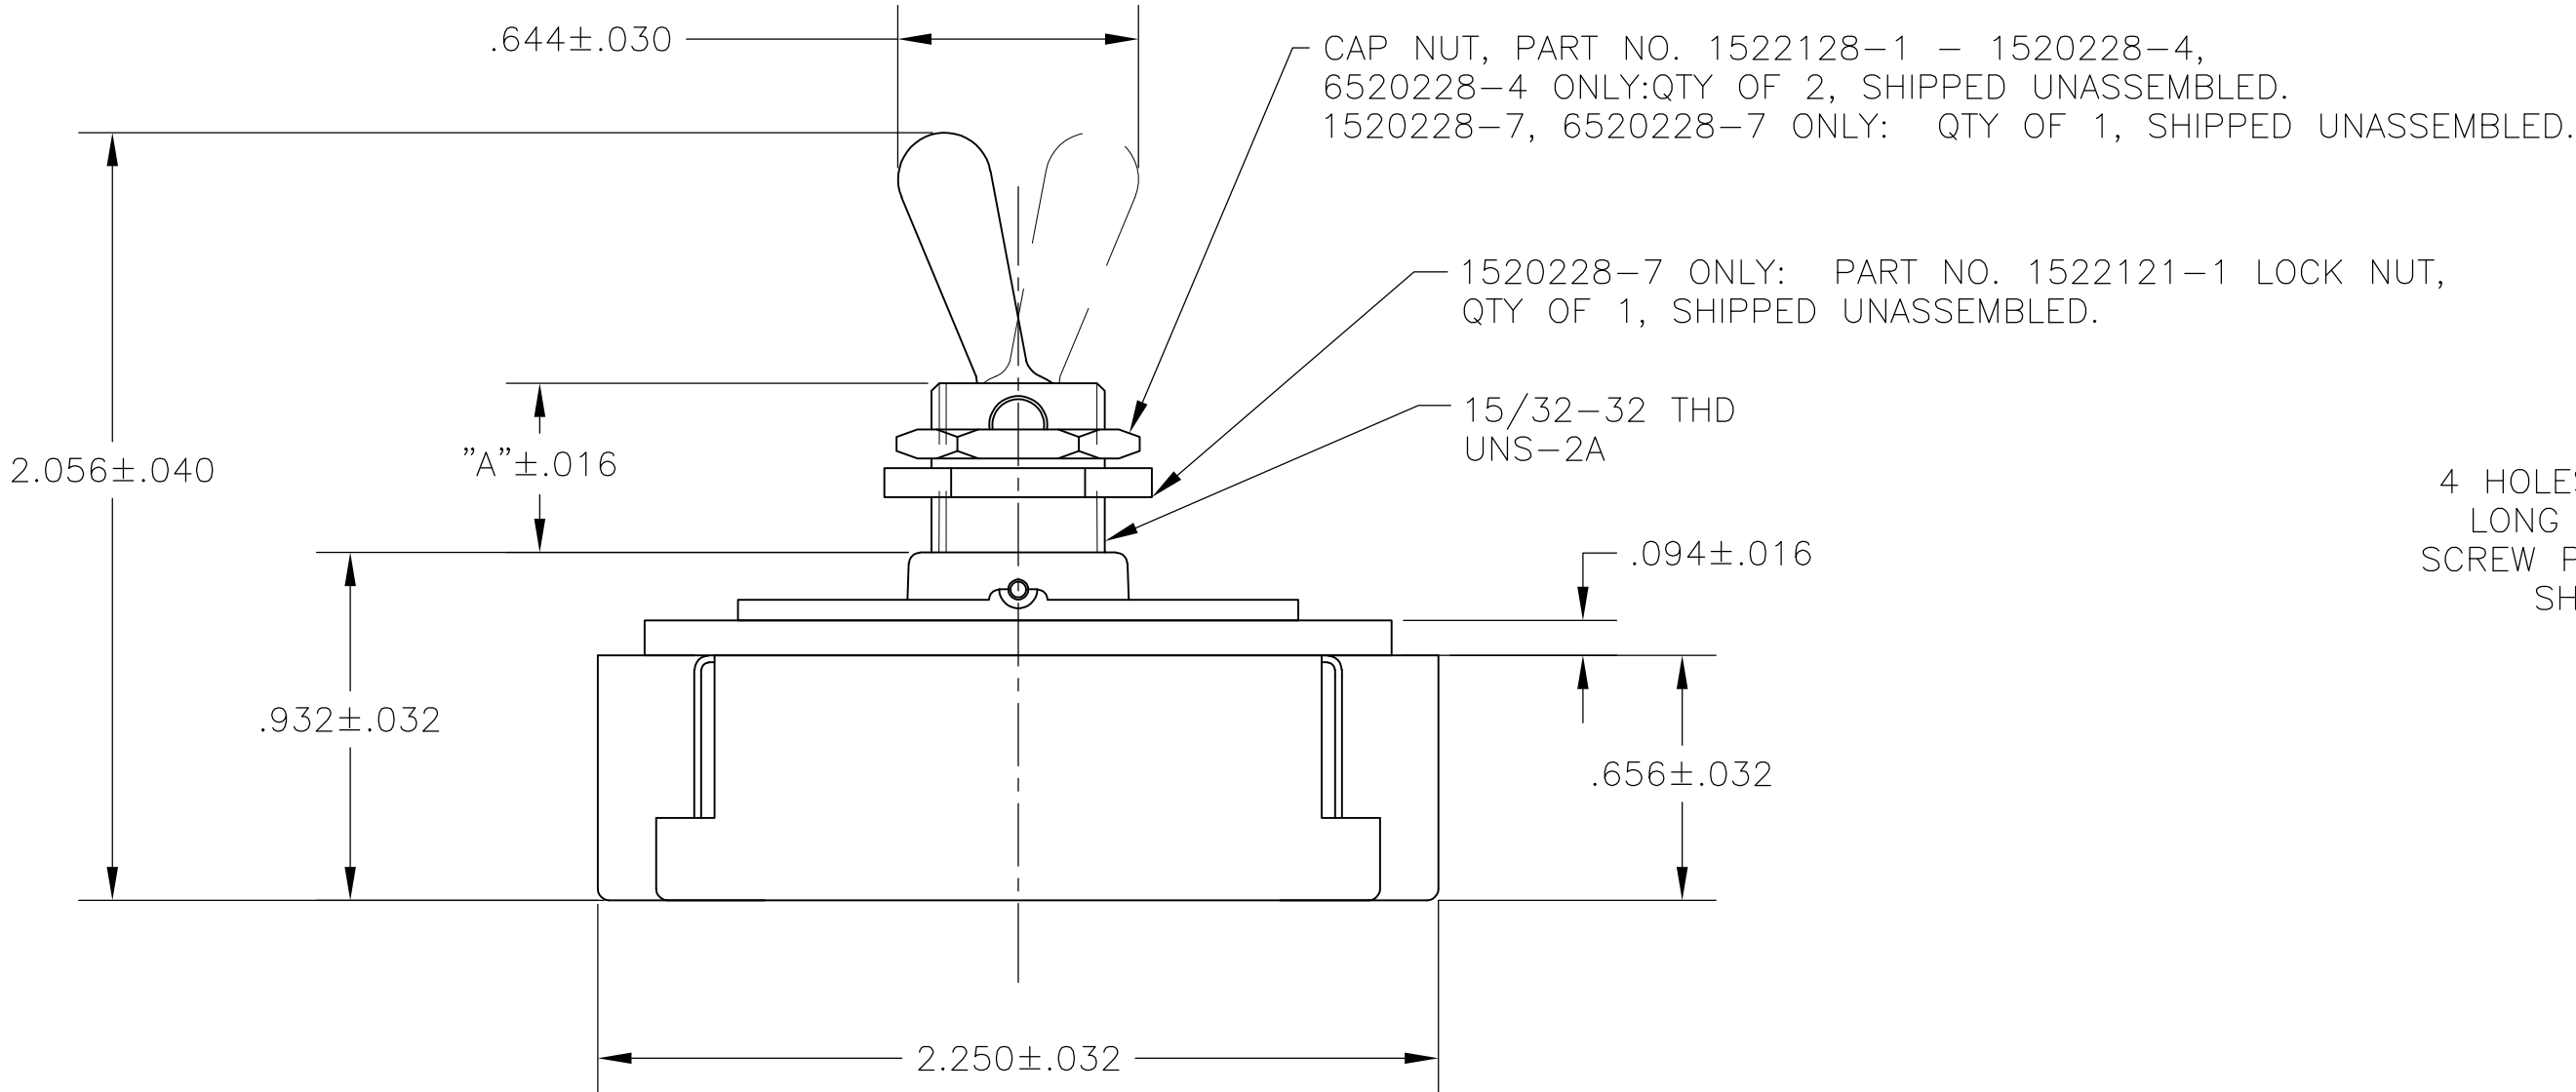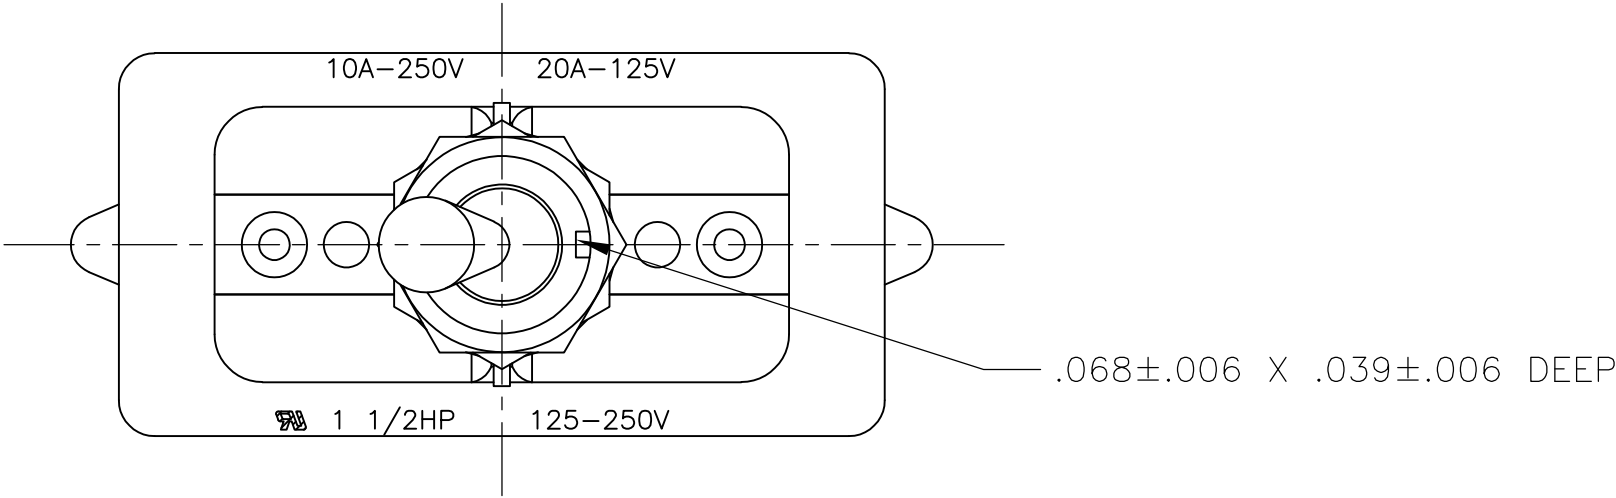



4 HOLES FOR 6-32 X .250
LONG UNDERCUT BDG. HD.
SCREW PART NO. 1523927-1
SHIPPED UNASSEMBLED

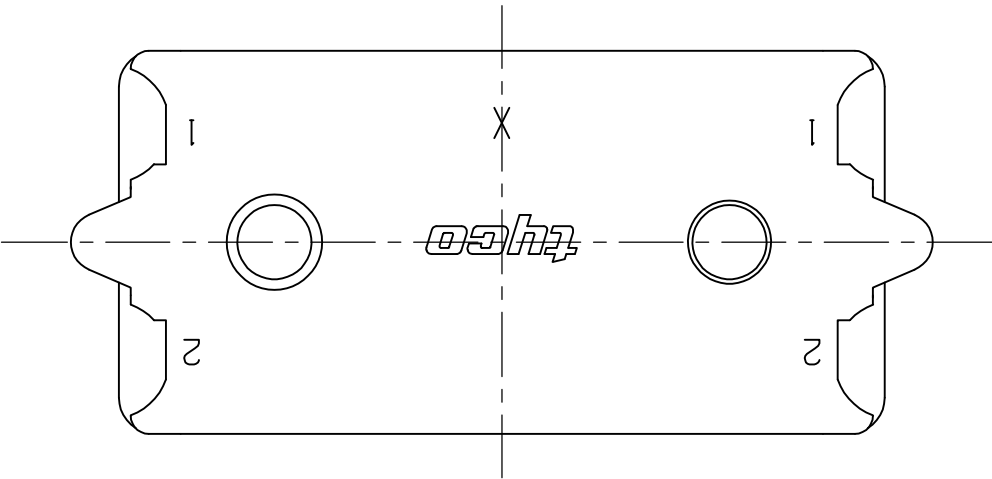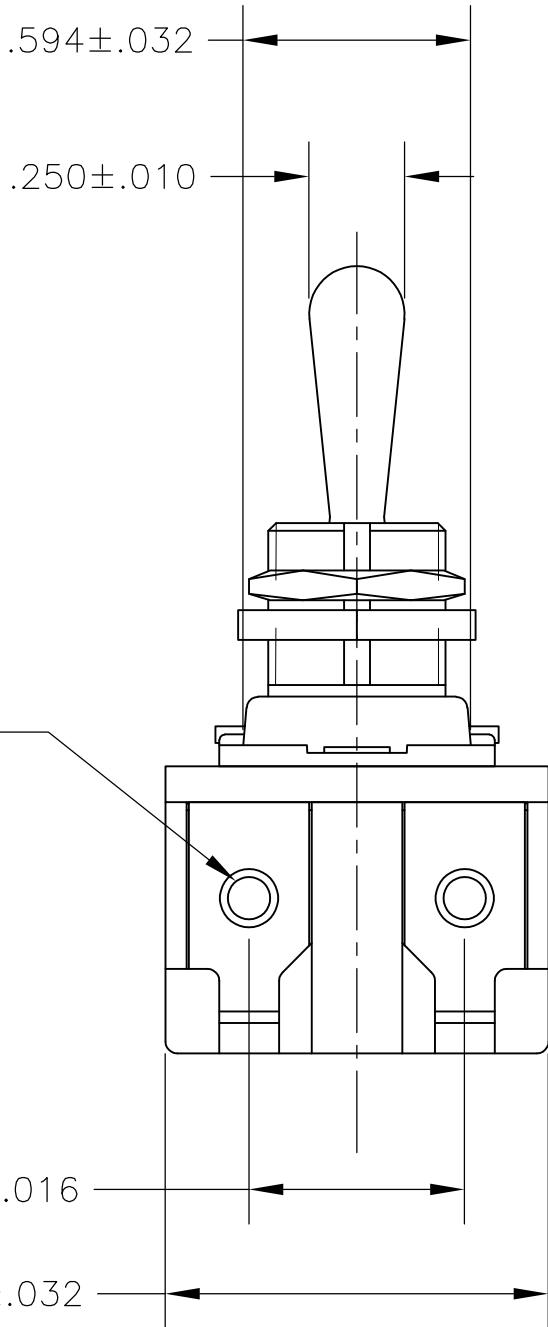

- 1 T-PAK - SWITCH AND HARDWARE INDIVIDUALLY PACKED IN PLASTIC BAGS BEFORE BEING PLACED IN AN INTERMEDIATE BOX WHICH IS THEN PLACED IN A SHIPPING BOX. SEE TABLE.
- 2 P/N X-6520228-X IS ROHS COMPLIANT.
- 3 MOUNTING DIMENSIONS FOR REFERENCE ONLY.

1520228-7/6520228-7	8909K23	15/32" THD LENGTH DIE CAST	.469	DPST T-PAKED W/SPECIAL HARDWARE
1520228-4/6520228-4	7360K8	15/32" THD LENGTH DIE CAST	.469	DPST
PART NO.	ARAB NO.	BUSHING / PLATE ASSY	A	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W. HANSON 29APR93	 TE Connectivity	
DIMENSIONS: INCHES		CHK W. Leonard 02MAY93		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 20 AMP 125V AC/DC, 10 AMP 250V AC/DC, 1 1/2 HP 125V/250V AC/DC, ONE HOLE MOUNTING TOOL HANDLE TOGGLE SWITCH	
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -		APVD E. WESOLEK 03MAY93	
MATERIAL -		APPLICATION SPEC -		RESTRICTED TO -
		WEIGHT -		
		CUSTOMER DRAWING		
		SCALE 2:1		
		SHEET 2 OF 4		
		REV B2		

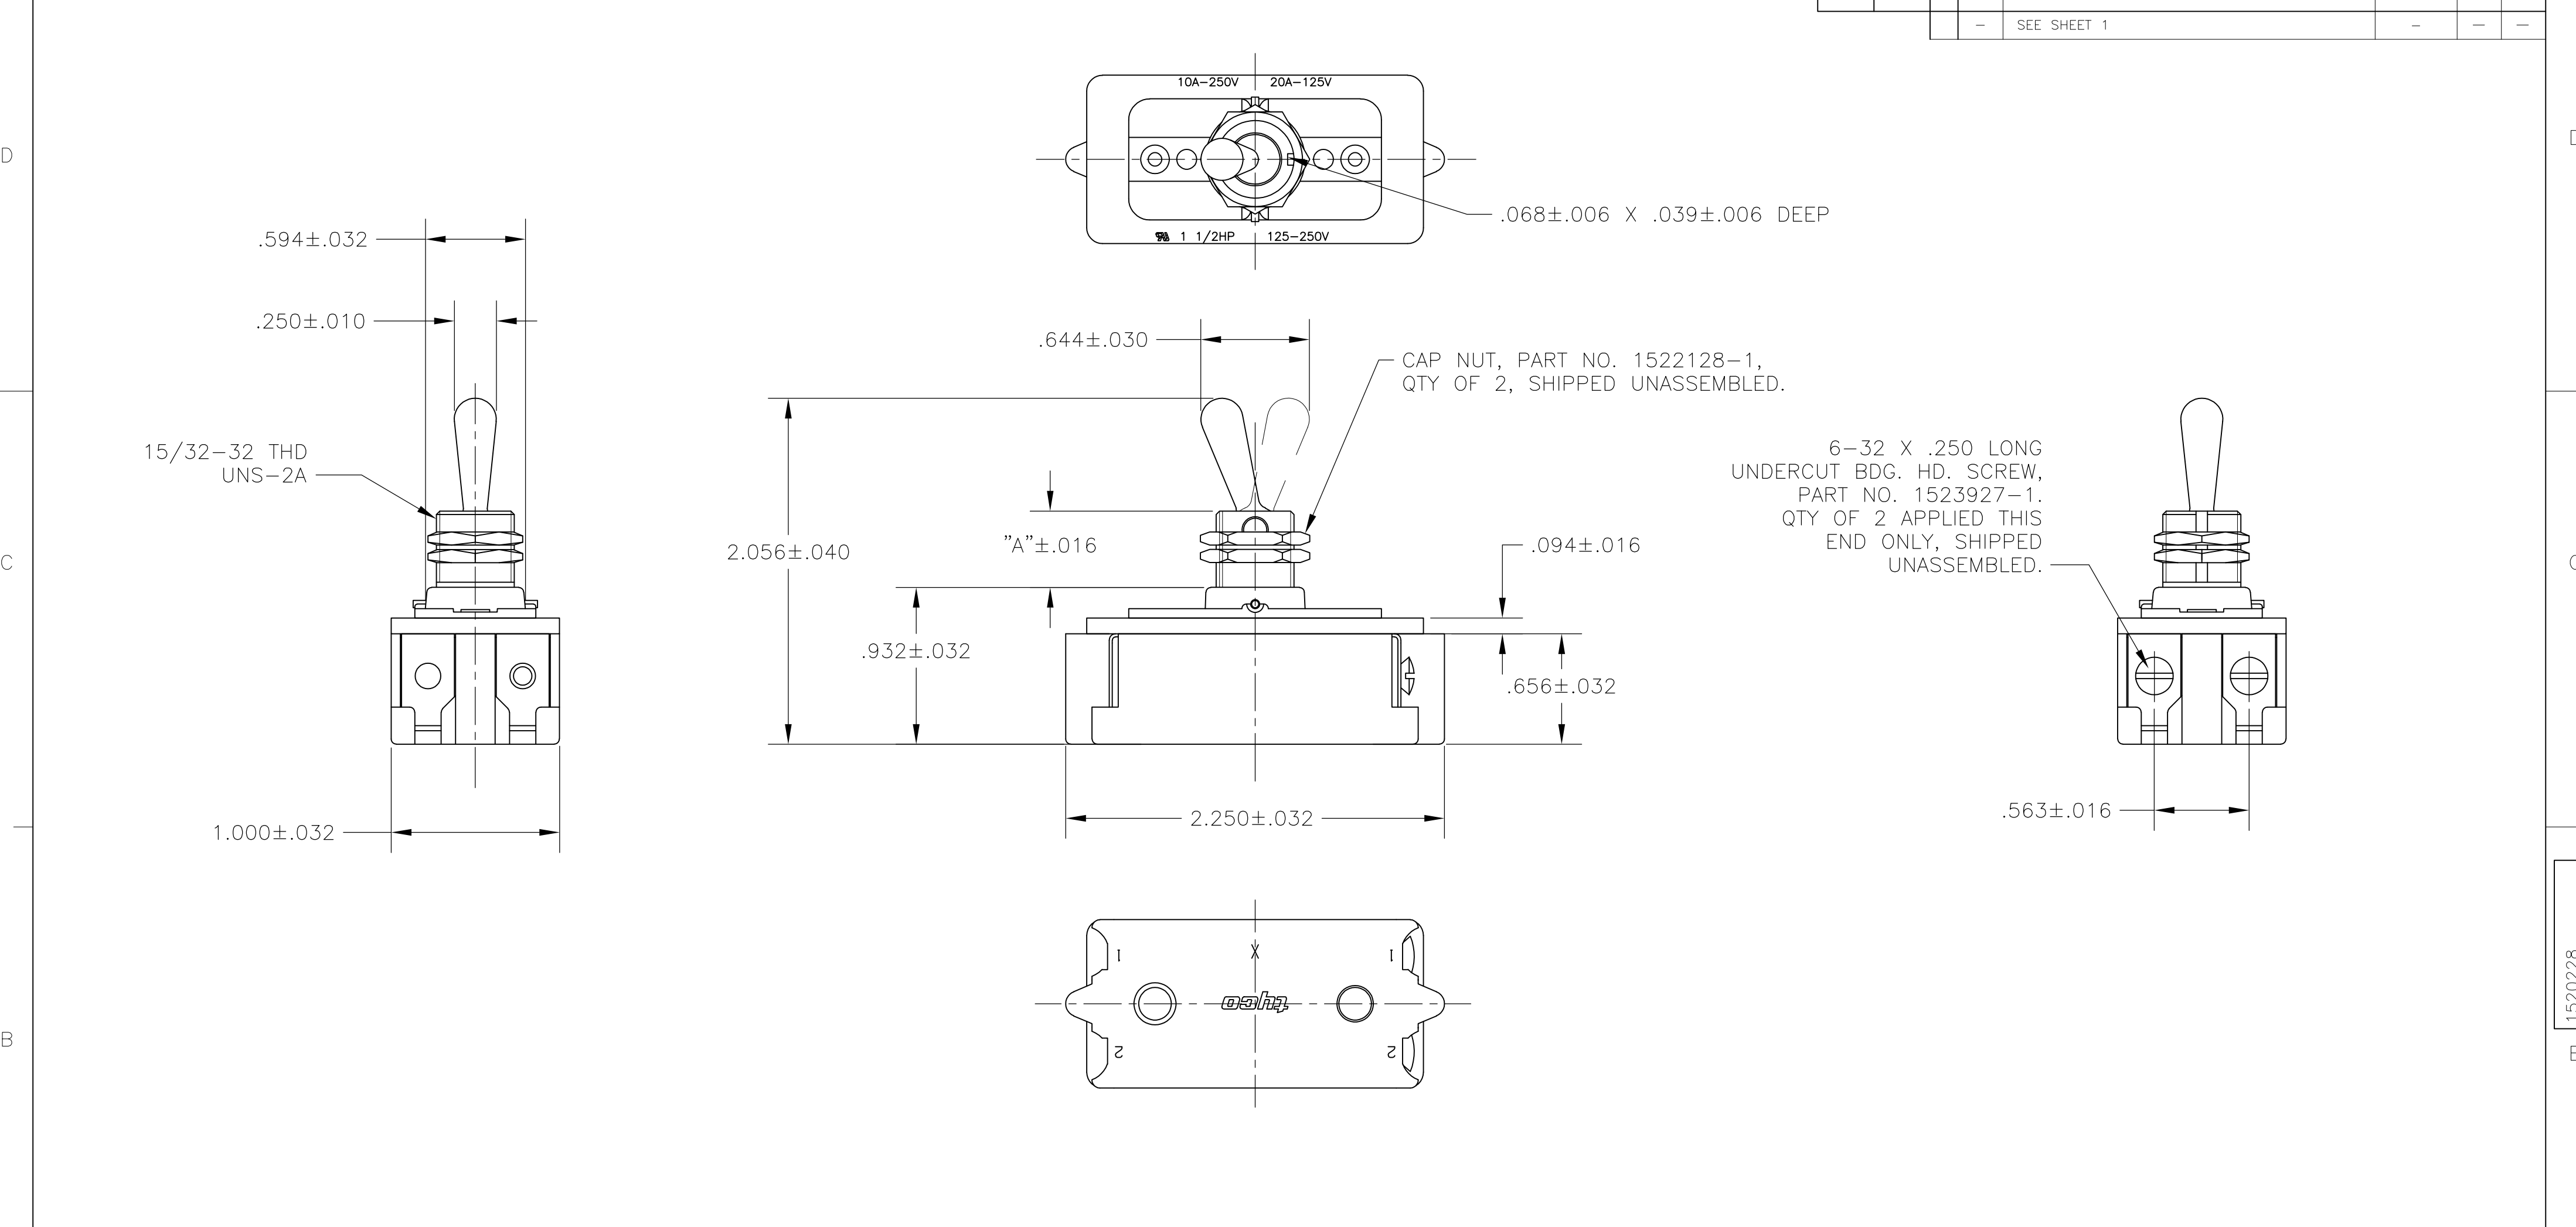

- 1

T-PAK — SWITCH AND HARDWARE INDIVIDUALLY PACKED IN PLASTIC BAGS BEFORE BEING PLACED IN A INTERMEDIATE BOX WHICH IS THEN PLACED IN A SHIPPING BOX. SEE TABLE.
- 2

PLY-O-PAK — SWITCH AND HARDWARE INDIVIDUALLY PACKED IN PLASTIC BAGS BEFORE BEING PACKED LOOSE IN A SHIPPING BOX. SEE TABLE.
- 3

P/N X-6520228-X IS ROHS COMPLIANT.
- 4

MOUNTING DIMENSIONS FOR REFERENCE ONLY.

					90-7016	
2-1520228-5/2-6520228-5	7361K5 T-PAK	15/32" THD LENGTH DIE CAST	.469	SPST		
1520228-9/6520228-9	8910K191	15/32" THD LENGTH DIE CAST	.469	SPST (PLY-O-PAK)		
1520228-5/6520228-5	7361K5	15/32" THD LENGTH DIE CAST	.469	SPST		
PART NO.	ARAB NO.	BUSHING / PLATE ASSY	A	DESCRIPTION		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-
FINISH	-	-

DWN
J. SMITH
13DEC77

CHK
R. GLENN
13DEC77

APVD
M.R. DUMMER
13DEC77

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
20 AMP 125V AC/DC, 10 AMP 250V AC/DC,
1 1/2 HP 125V/250V AC/DC, ONE HOLE MOUNTING
TOOL HANDLE TOGGLE SWITCH

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-1520228




RESTRICTED TO
-

SCALE
NTS

SHEET
3 OF 4

REV
B2

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

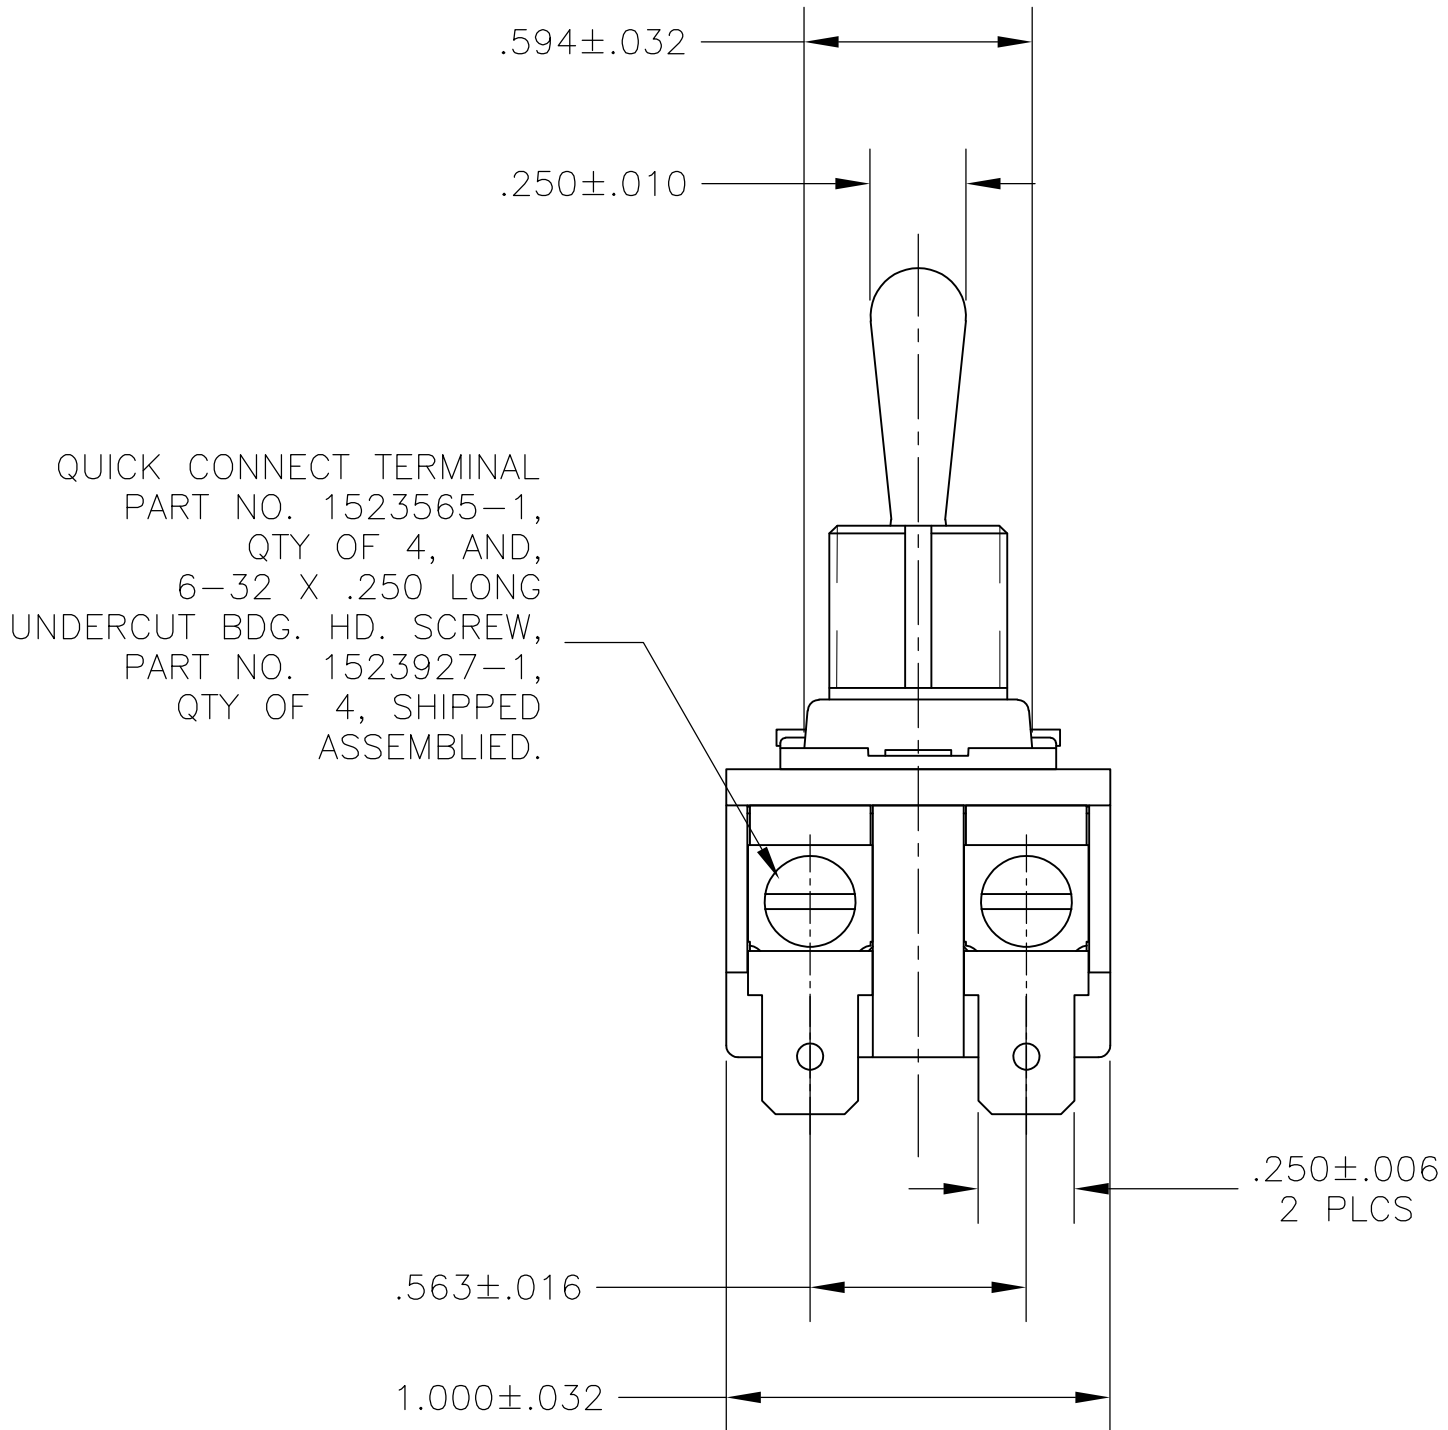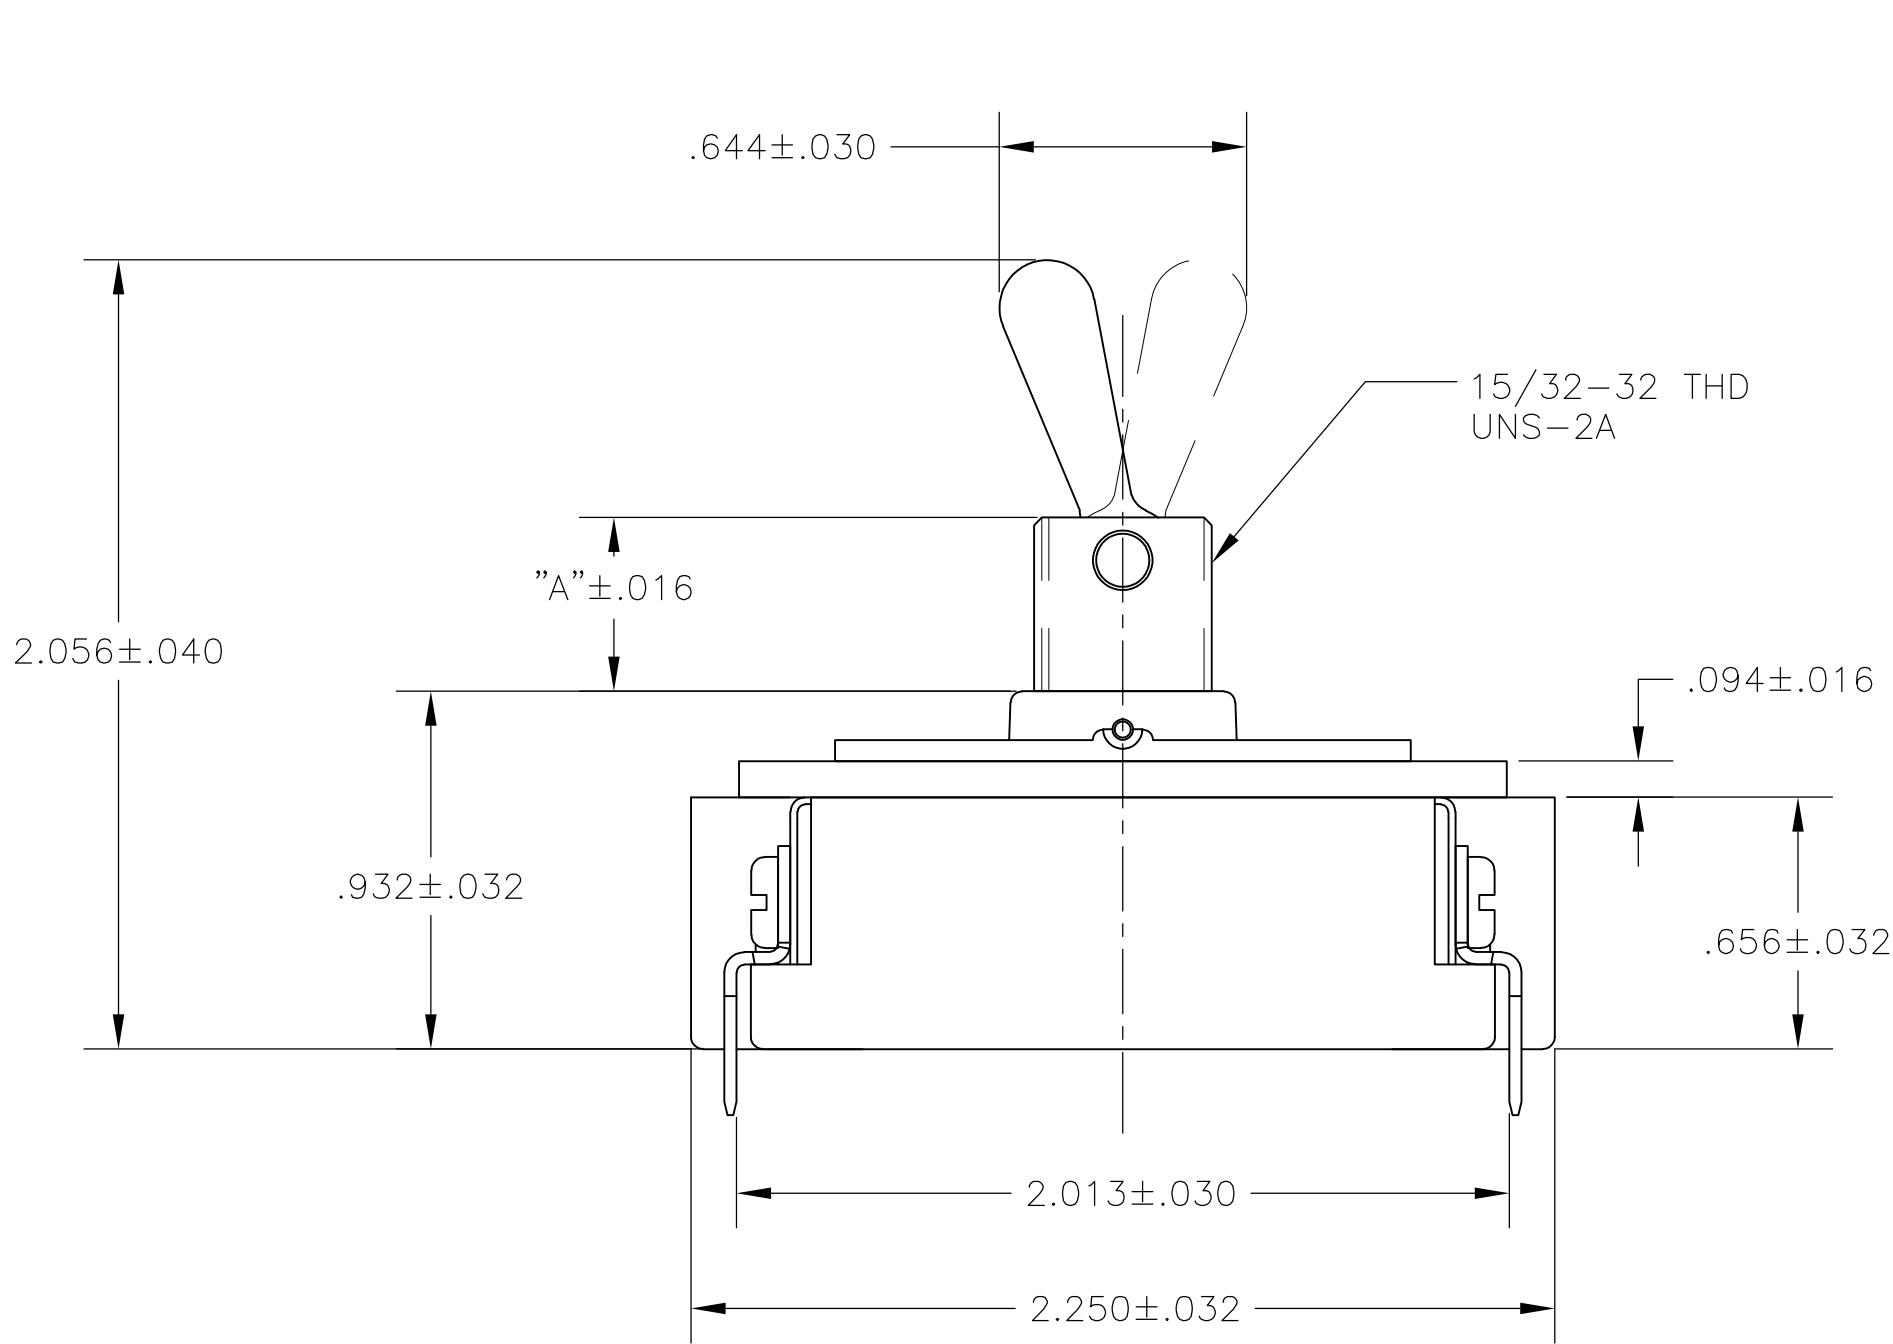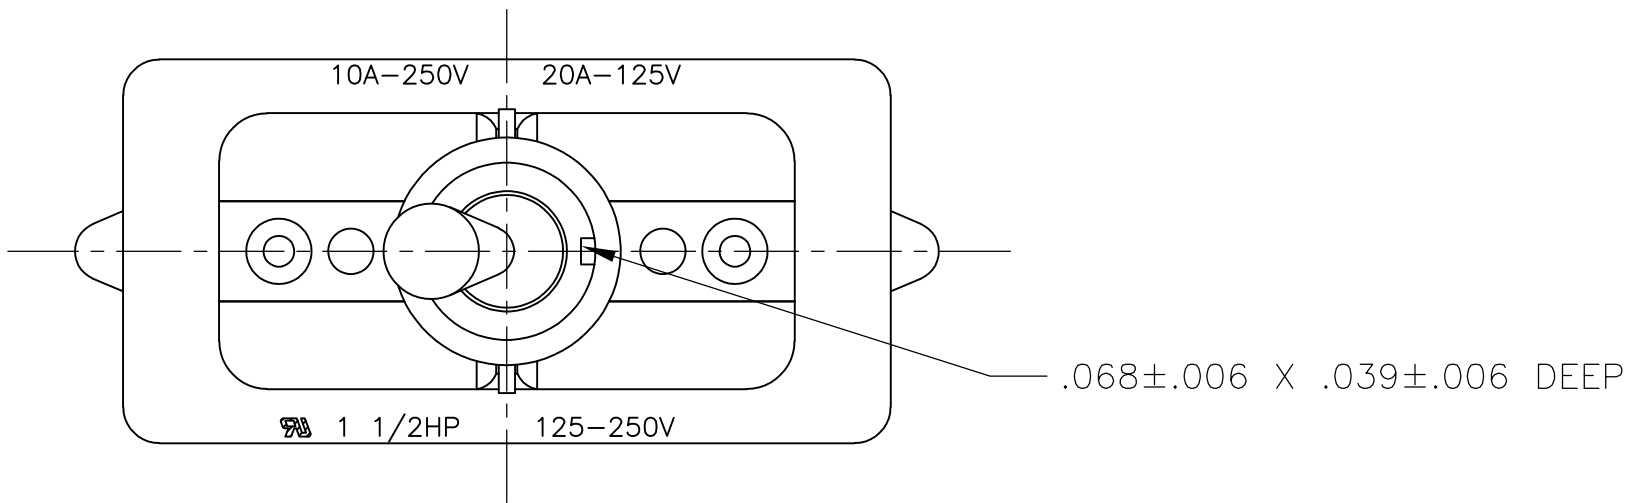

- 1 P/N X-6520228-X IS ROHS COMPLIANT.
- 2 MOUNTING DIMENSIONS FOR REFERENCE ONLY.

1520228-8/6520228-8	8910K12	15/32" THD LENGTH DIE CAST	.469	DPST
PART NO.	ARAB NO.	BUSHING / PLATE ASSY	A	DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.CHRISTENSEN 25OCT95		TE Connectivity									
DIMENSIONS: INCHES		CHK W.HANSON 01NOV95											
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M.R.DUMMER 09NOV95		NAME 20 AMP 125V AC/DC, 10 AMP 250V AC/DC, 1 1/2 HP 125V/250V AC/DC, ONE HOLE MOUNTING TOOL HANDLE TOGGLE SWITCH								
			PRODUCT SPEC —										
			APPLICATION SPEC —		SIZE A2		CAGE CODE 00779		DRAWING NO C=1520228		RESTRICTED TO —		
	MATERIAL —		FINISH —		WEIGHT —		CUSTOMER DRAWING		SCALE 2:1		SHEET 4 of 4		REV B2



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.