

Features

- RoHS lead-solder-exemption compliant
- New 3.3 V and 5 V output models
- Universal input 85-264 VAC
- Industry-standard footprint: 7.00" x 4.30" x 1.97" (177.8 x 109.2 x 50.0 mm)
- Input transient & ESD compliance to EN61000-4-2/-3/-4
- Greater than 134,000 hours MTBF
- Remote sense and overvoltage protection on single output units and main output of multiple output units
- Options include overtemperature protection, Power Fail signal, chassis, & cover

Description

Power-One's MAP110 Series of power supplies combines low cost and universal input in a board-only power solution to meet commercial and industrial requirements. Full international safety, EMI, and ESD compliance ensure worldwide acceptance. All units bear the CE Mark.

Wide dynamic output current and fixed-frequency operation simplifies system level operation. The MAP110 series is configured to an international standard footprint. Input and output connections are made via popular single-row Molex connectors.

Single output models feature wide-range output adjustability to meet a wide variety of standard and user-specific output voltage requirements.

Single-Output Model Selection

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	CONVECTION COOLED OUTPUT CURRENT	FORCED AIR OUTPUT CURRENT	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE %p-p (NOTE 1)	INITIAL SETTING ACCURACY
MAP110-1005	5V	4.95V to 5.50	16A	2	0.2%	1%	1%	5.09V to 5.11V
MAP110-1012	12V	11.25V to 12.75V	7.5A	10A	0.1%	0.5%	1%	11.97V to 12.02V
MAP110-1024	24V/28V	22.8V to 29.2V	3.8/3.2A (Note 2)	5.0/4.3A (Note 2)	0.1%	0.5%	1%	23.95V to 24.05V

NOTES: 1) Maximum peak-to-peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.

2) MAP110-1024 output currents are expressed as 24V/28V operation.

Multiple-Output Model Selection— 80W Convection Cooled, 110W Forced-Air Cooled (200 LFM)

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	CONVECTION COOLED CURRENT (NOTE 1)	FORCED AIR CURRENT	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE %p-p (NOTE 2)	INITIAL SETTING ACCURACY
MAP110-4000	+5V	4.75V to 5.25V	12A/20A PK	12A/20A PK	0.2%	0.5%	1%	5.09V to 5.11V
	+12V	Fixed	5A/9A PK	5A/9A PK	0.2%	1%	1%	11.97V to 12.03V
	-12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.2%	1%	1%	-11.4V to -12.6V
	-5V	Fixed	1A/1.5A PK	1A/1.5A PK	0.2%	1.5%	1%	-4.75V to -5.25V
MAP110-4001	+5V	4.75V to 5.25V	12A/20A PK	12A/20A PK	0.2%	0.5%	1%	5.09V to 5.11V
	+24V	Fixed	3A/4.5A PK	3A/4.5A PK	0.1%	1%	1%	23.94V to 24.06V
	-12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	-11.4V to -12.6V
MAP110-4002	+12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	11.4V to 12.6V
	+5V	4.75V to 5.25V	12A/20A PK	12A/20A PK	0.2%	0.5%	1%	5.09V to 5.11V
	+12V	Fixed	5A/9A PK	5A/9A PK	0.1%	1%	1%	11.97V to 12.03V
	-12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	-11.4V to -12.6V
MAP110-4003	+12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	11.4V to 12.6V
	+5V	4.75V to 5.25V	12A/20A PK	12A/20A PK	0.2%	0.5%	1%	5.09V to 5.11V
	+15V	Fixed	5A/7.3A PK	5A/7.3A PK	0.1%	1%	1%	14.96V to 15.04V
	-15V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	-14.3V to -15.7V
MAP110-4004	-5V	Fixed	1A/1.5A PK	1A/1.5A PK	0.2%	1.5%	1%	-4.75V to -5.25V
	+5V	4.75V to 5.25V	12A/20A PK	12A/20A PK	0.2%	0.5%	1%	5.09V to 5.11V
	+24V	Fixed	3A/4.5A PK	3A/4.5A PK	0.1%	1%	1%	23.94V to 24.06V
	-15V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	-14.3V to -15.7V
MAP110-4004	+15V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	14.3V to 15.7V

Model numbers highlighted in yellow or shaded are not recommended for new designs.

Multiple-Output Model Selection (Cont.) – 80W Convection Cooled, 110W Forced-Air Cooled (200 LFM)

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	CONVECTION COOLED CURRENT (NOTE 1)	FORCED AIR CURRENT	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE %p-p (NOTE 2)	INITIAL SETTING ACCURACY
MAP110-4010	+5V	4.75V to 5.25V	12A/20A PK	12A/20A PK	0.2%	0.5%	1%	5.09V to 5.11V
	+12V	Fixed	5A/9A PK	5A/9A PK	0.1%	2%	1%	11.97V to 12.03V
	-5V	Fixed	1A/1.5A PK	1A/1.5A PK	0.2%	1.5%	1%	-4.75V to -5.25V
	-12V	Fixed	3A/4A PK	3A/4A PK	0.3%	8%	1%	-11.5V to -12.5V
MAP110-4011	+5V	4.75V to 5.25V	12A/20A PK	12A/20A PK	0.2%	0.5%	1%	5.09V to 5.11V
	+12V	Fixed	5A/9A PK	5A/9A PK	0.1%	1%	1%	11.97V to 12.03V
	-12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	-11.4V to -12.6V
	+24V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	23.2V to 24.8V
MAP110-4015	+5V	4.75V to 5.25V	12A/20A PK	12A/20A PK	0.2%	0.5%	1%	5.09V to 5.11V
	+12V	Fixed	5A/9A PK	5A/9A PK	0.1%	1%	1%	11.97V to 12.03V
	-15V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	-14.4V to -15.6V
	+15V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	14.4V to 15.6V
MAP110-4200	+12V	11.55V to 12.45V	5A/9A PK	5A/9A PK	0.2%	0.5%	0.5%	11.96V to 12.03V
	+24V	Fixed	4A/4.5A PK	4A/4.5A PK	0.2%	1%	1%	23.94V to 24.06V
	-12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.2%	1%	1%	-11.4V to -12.6V
	+5V	Fixed	2A/2.5A PK	2A/2.5A PK	0.2%	1.5%	1%	4.75V to 5.25V
MAP110-4300 (Note 3)	+3.3V	3.2V to 3.4V	12A/20A PK	15A/20A PK	0.3%	0.7%	1%	3.29V to 3.31V
	+5V	Fixed	5A/12A PK	8A/12A PK	0.2%	1%	1%	4.98V to 5.02V
	-12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	-11.4V to -12.6V
	+12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	11.4V to 12.6V
MAP110-4305 (Note 3)	+3.3V	3.2V to 3.4V	12A/15A PK	15A/20A PK	0.3%	0.7%	1%	3.29V to 3.31V
	+5V	Fixed	5A/12A PK	8A/12A PK	0.2%	1%	1%	4.98V to 5.02V
	-5V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	-4.75V to -5.25V
	+12V	Fixed	1A/1.5A PK	1A/1.5A PK	0.1%	1%	1%	11.4V to 12.6V

- NOTES:** 1) Peak loads up to 110 watts for 60 seconds or less are acceptable, (10% duty cycle max.). Peak power must not exceed 110 watts.
 2) Maximum peak-to-peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.
 3) Sum of the output currents of V1 + V2 may not exceed 15 A continuous, 22 A peak.

Model numbers highlighted in yellow or shaded are not recommended for new designs.

Maximum Output Rating:

MODEL/OUTPUT OPTION	MULTIPLE OUTPUT BOARD ONLY	SINGLE OUTPUT BOARD ONLY	MULTIPLE OUTPUT 'L'-BRACKET	SINGLE OUTPUT 'L'-BRACKET	MULTIPLE OUTPUT 'C'-COVER	SINGLE OUTPUT 'C'-COVER
CONVECTION CONTINUOUS/PEAK	80W/110W	90W/120W	80W/110W	90W/120W	60W/110W	65W/120W
FORCED AIR 200 LFM	110W	120W	110W	120W	110W	120W

Input Specifications

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Input Voltage - AC	Continuous input range.	85		264	VAC
Input Frequency	AC input.	47		63	Hz
Brown Out Protection	Lowest AC input voltage that regulation is maintained with full rated loads.	85			VAC
Hold-up Time	Nominal AC input voltage (110 VAC)	50% load:	40		mS
		Full rated load:	20		
Input Current	85 VAC (110W load).			3.5	ARMS
	110VAC (110W load).			2.8	
Input Protection	Non-user serviceable internally located AC input line fuse.				
Inrush Surge Current	Internally limited by thermistor. Vin = 264 VAC (one cycle). 25 °C.			41	APK
Operating Frequency	Switching frequency of main transformer, (fixed frequency).	20		25	kHz

Output Specifications

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency	Full load, 230 VAC. Varies with distribution of loads among outputs.	65	75	80	%
Minimum Loads	Single output models.	0			Amps
	Multiple output models, V1 + V2 (Note 1).	1			Amps
Ripple and Noise	Full Load, 20 MHz Bandwidth.				See Model Selection Chart.
Output Power	Multiple output units with convection cooling.	5		80	Watts
	Multiple output units with 200 LFM forced air cooling.	5		110	Watts
Overshoot / Undershoot	Output voltage overshoot/undershoot at turn-on.			0	V
Regulation	Varies by output, regulation includes: line changes from 90-132 VAC or 175-264, changes in load starting at 20% load and changing to 100% load.				See Model Selection Chart.
Transient Response	Recovery time, to within 1% of initial set point due to a 50-100% load change, 4% max. deviation. (Main output only on multiple output units).		500		μS
Turn-on Delay	Time required for initial output voltage stabilization.			1	Sec
Turn-on Rise Time	Time required for output voltage to rise from 10% to 90%.			20	mS

Interface Signals and Internal Protection

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	Provided on single output models and the main output of multiple output models.	MAP110-1005	6.10	7.20	V
		MAP110-1012	17.3	20.2	
		MAP110-1024	32.2	37.8	
		MAP110-4200	13.8	16.2	
		MAP110-4300	3.7	4.35	
		All other models.	5.75	6.75	
Overload Protection	Fully protected against output overload and short circuit. Automatic recovery upon removal of overload condition.		150	200	%
Remote Sense	Voltage drop compensated for at the load.			250	mV
Input Power Fail Warning	Option, TTL compatible logic signal. Time before regulation dropout due to loss of input power at 110 VAC. Active low.	3	5		mS
Overtemperature Protection	Option, system shutdown due to excessive internal temperature.				

Safety, Regulatory, and EMI Specifications

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	UL1950.				Approved.
	CSA 22.2 No. 234/950.				
	EN60950 (TUV).				
Dielectric Withstand Voltage	Input to Output.	2600			VDC
Electromagnetic Interference, Conducted	FCC CFR title 47 part 15 sub-part B - conducted & radiated.		B		Class
	EN55022 / CISPR 22 conducted.		B		
	EN55022 / CISPR 22 radiated (Note 2).		A		
Input Transient Protection	EN61000-4-5 level 3.	2			kV
Insulation Resistance	Input to output.	10			MΩ
Leakage Current	Per EN60950, 264 VAC.			750	μA

NOTES: 1) Minimum load is required only to meet the regulation limits of V3 and V4. If V3 and V4 are unused, no minimum load is necessary.

2) The following units meet Class B: MAP110-1005, MAP110-4000/4011/4015/4200/4300.

Environmental Specifications


PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating.			10k	ASL Ft.
	Non-operating.			50k	ASL Ft.
Operating Temperature	Derate linearly above 50°C by 2.5% per° C to a maximum temperature of 70°C.	At 100% load:	0	50	°C
		At 50% load:	0	70	°C
Storage Temperature		-55		85	°C
Temperature Coefficient	0°C to 70°C.		±0.03	±0.05	%/°C
Relative Humidity	Non-condensing.			95	%RH

Options

DESCRIPTION	NOTES	DIMENSIONS
L-Bracket	Add 'L' suffix to model number.	7.15" x 4.50" x 2.40" (182.0mm x 115.0mm x 61.0mm)
Cover	Add 'C' suffix to model number. Includes L-Bracket.	7.20" x 4.50" x 2.40" (183.0mm x 115.0mm x 61.0mm)
Power Fail Signal	Add 'P' suffix to model number. Provides >5 mS typical warning time before main output drops 5%. Warning time increases at reduced load levels.	N/A
Thermal Shutdown	Add 'T' suffix to model number. Initiates shut-down in the event of an overtemperature condition. Automatic recovery.	N/A

OVERALL SIZE: 7.00" X 4.30" X 1.97" (177.8mm x 109.2mm x 50.0mm)

OVERALL WEIGHT: 1.3 lb (0.59 kg)

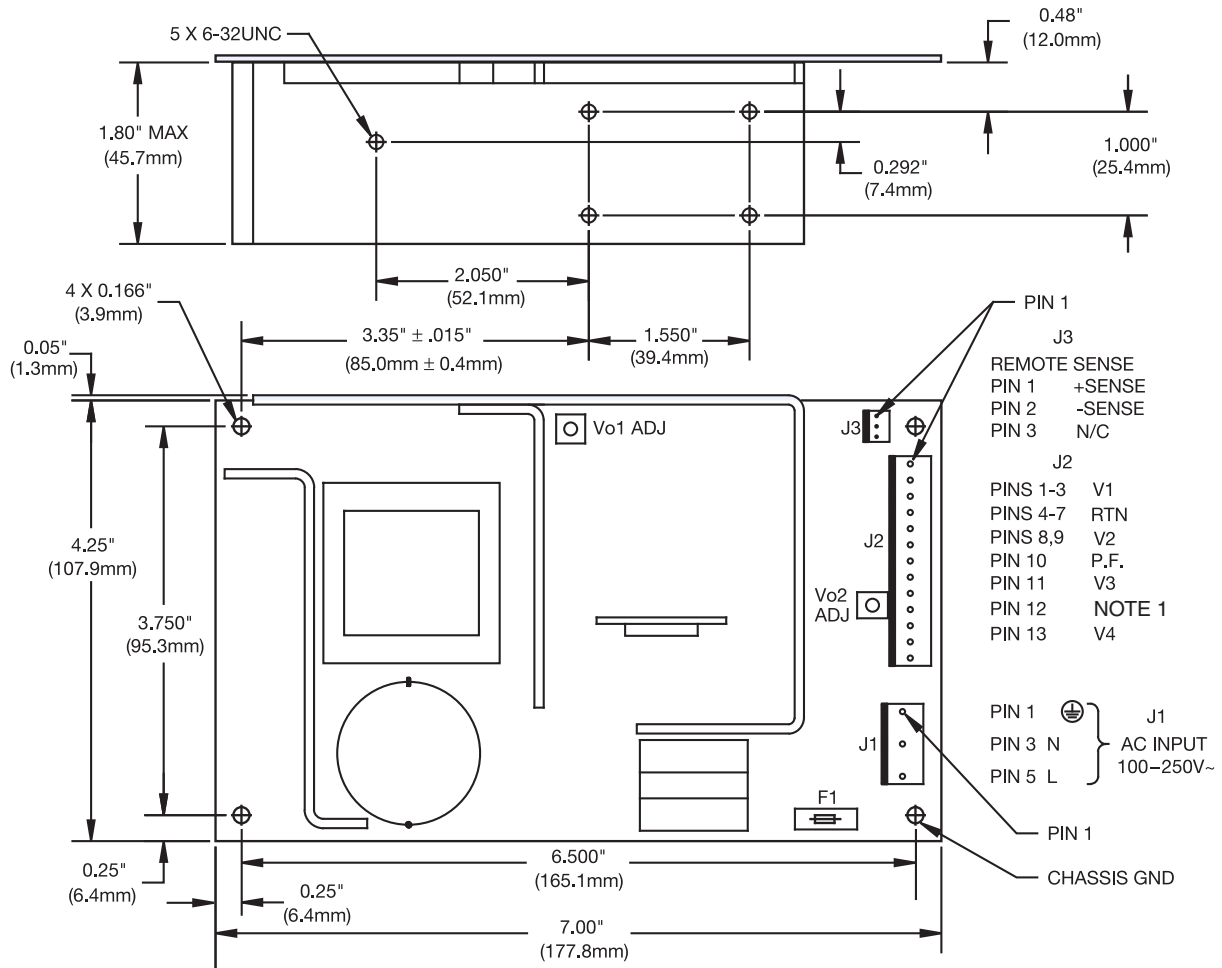

MOLEX PCB PIN CONNECTOR INFORMATION				
REF DESIG	SERIES	MOLEX P/N	SPACING	PINS, SQUARE
J1	41671 or	26-48-1055*	0.156 (3.96)	0.045 (1.14)
	41791	26-60-4050*	0.156 (3.96)	0.045 (1.14)
J2	41671 or	26-48-1135	0.156 (3.96)	0.045 (1.14)
	41791	26-60-4130	0.156 (3.96)	0.045 (1.14)
J3	6373	22-23-2031	0.100 (2.54)	0.025 (0.64)

*With pins 2 & 4 removed for double spacing.

NOTES:

- 1.) When the V4 output is a positive (+) output, pin 12 on J2 is connected to RTN.
When the V4 output is a negative (-) output, pin 12 on J2 is connected to V4.

Contact factory for dimensions for L-bracket and cover.

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.