# Amphenol

Amphenol-Tuchel Electronics GmbH

## eco|mate m

## Circular Connectors

|mate by Amphenol

## The Company

Amphenol-Tuchel Electronics GmbH is a member of the USA based Amphenol Corporation. With our own global presence we offer our customers exceptional technical support and worldwide service in the areas of development, production and distribution. Amphenol-Tuchel Electronics GmbH has a successful history as a partner to our customers and sets standards for connector technology.

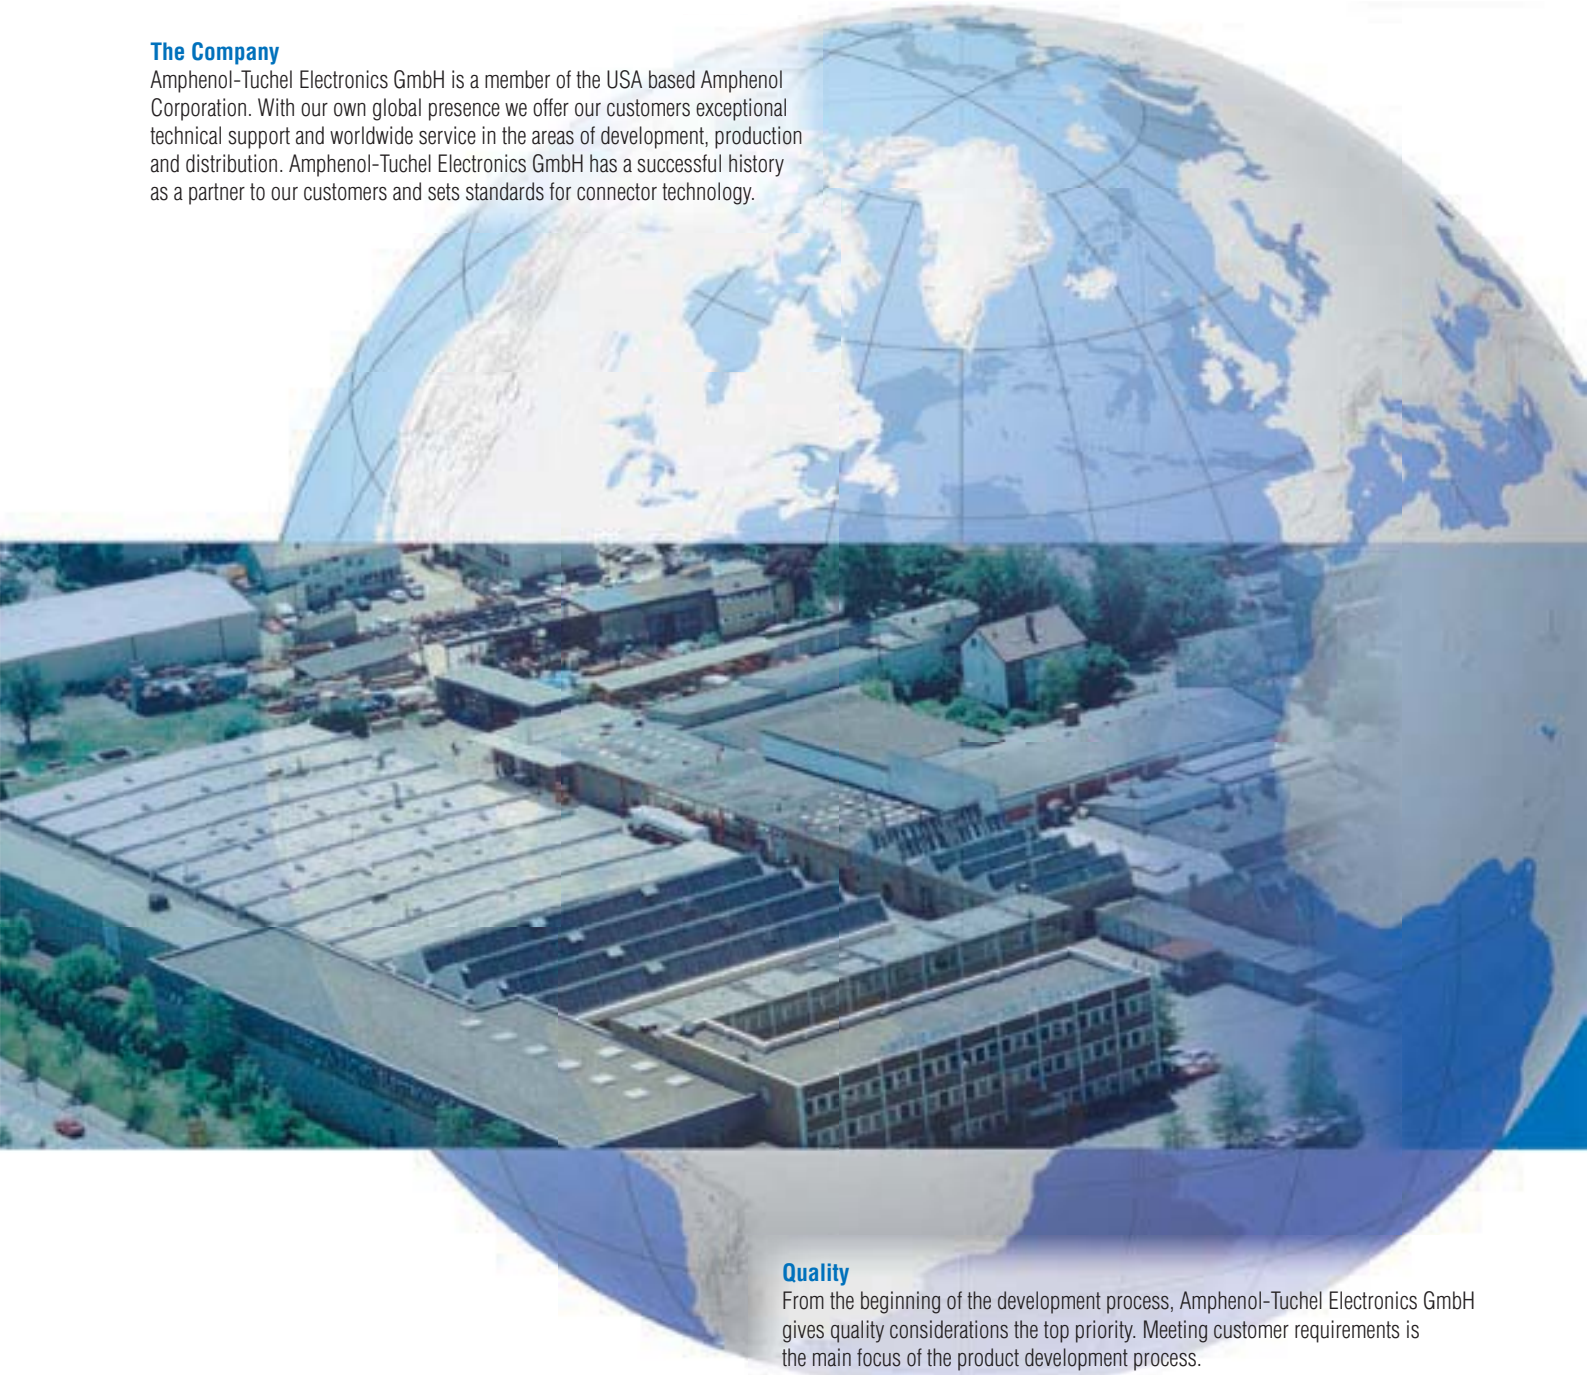

## Quality

From the beginning of the development process, Amphenol-Tuchel Electronics GmbH gives quality considerations the top priority. Meeting customer requirements is the main focus of the product development process.
Interdisciplinary project teams with diverse backgrounds from marketing, product engineering and production guarantee the development and production of robust and reliable connector solutions.
Our quality assessment begins with the initial contact to the customer and extends through the life of the product. A satisfied customer is the measure of our success.
We strive to use environmentally friendly processes that minimize the waste of natural resources and introduction of toxins into the environment.

Certifications: TS 16949
ISO 14001
ISO 9000:2000

## General information

We reserve the right to change the design due to improvement in quality, development or production requirements.

This catalogue must not be used in any form or manner without our prior approval in writing (Copyright Law, Fair Trading Law, Civil Code).

This release replaces all former releases.

eco|mate is a registered trademark. Usage or modification is not allowed without written permission of Amphenol-Tuchel.

# eco|mate m

- New cable screw connection with clamping ring
- Strain relief and mounted gasket all in one component
- Ergonomically shaped handle for a better grip and safer handling
- Fastening for the protective caps on the receptacle housing
- One cable housing for all cable diameters (6 mm - 12,5 mm)

## Content


| | Page |
|---|---|
| **General Information** | **2** |
| **Product Description** | **5** |
| Technical Data | 6 |
| Derating Curves / Order Information | 7 |
| Products | 8 |
| Crimp Contacts | 10 |
| Accessories | 11 |
| Mounting Instructions | 12 |
| **Technical Information** | **13** |
| **Remarks / Safety Classification** | **16** |
| **Summary of Part Numbers** | **17** |

## Product Description

In design and conception the eco|mate m program meets the high requirements for applications in industrial technology. Easy operation, reduced dimensions and a more robust design to withstand harsh conditions are only a few of the features of the series.

The connector's main area of application is in the fields of plant construction and machine building. The connector is principally used for measuring and controlling applications such as the control technology for motive engineering, but may also be used for medical. The series is comprised of a large selection of housings and shapes, as well as models with screw, solder and crimp termination.

**Features:**
- Circular Connectors with 3+PE and 6+PE contacts
- Housing components made from premium molding material
- Cable housing straight or angled
- Vibration safe connection through stable and non-sensitive screw locking
- Protection class IP 65/67 in mated condition in accordance with DIN EN 60526
- Clamping ring or internal strain relief

**Advantages:**
- Quick and easy assembly
- Screwed cable gland with clamping ring
- Strain relief and mounted gasket all in one component
- Cable housing, straight or angled, for the cable diameter 6 - 12,5 mm
- Robust thread for the screwed cable gland
- Ergonomically designed product range for safe handling, even under harsh working conditions
- Pre-loaded ground contact
- Fastening for the protective caps on the housing of the receptacles
- The eco|mate m program is compatible and interchangeable with the C16-1 series

**Additional standards:**
- The 6+PE model corresponds to DIN 9684-1 interface to the signal transmission on agricultural machines and tractors
- Housing material is in accordance with DIN 5510, Part 2 the required behavior in the fire

| Testhouse | | Characteristics | Approval Number |
|---|---|---|---|
| VDE | VDE | 3+PE, 400 V, 16 A<br>6+PE, 250 V, 10 A | 1781<br>1780 |
| SEV | | 3+PE, 400 V, 16 A<br>6+PE, 250 V, 6 A | 00.0394 |
| UL | | 3+PE, 250 V, 12 A<br>6+PE, 250 V, 8 A | E 63093 |
| CSA | | 3+PE, 250 V, 12 A<br>6+PE, 250 V, 8 A (Solder version)<br>6+PE, 250 V, 15 A (Crimp version) | 48932 |
| German LLyod | GL | 3+PE, 250 V, 16 A<br>6+PE, 50 V, 8 A | 14108 / 84 |

In general approvals refer to versions of the connector series. Test report upon request.

Index

| General Characteristics | Standard | Characteristics | | |
|---|---|---|---|---|
| Number of contacts | | 3 + PE | 6 + PE | |
| | |  | | |
| **Electrical Characteristics** | | screw type | solder type | crimp type |
| Rated insulation voltage | DIN EN 60664-1[1)] | 400 V | 250 V | 250 V |
| Rated impulse withstand voltage | DIN EN 60664-1[1)] | 6000 V | 4000 V | |
| Pollution degree | DIN EN 60664-1[1)] | 3 | 3 | |
| Installation (overvoltage) category | DIN EN 60664-1[1)] | III | III | |
| Material group | DIN EN 60664-1[1)] | II | II | |
| Current carrying capacity | DIN EN 60512-5-2, Test 5b | 16 A / + 55 °C | 10 A / + 55 °C | 13 A / + 55 °C |
| Insulation resistance | DIN EN 60512-3-1, Test 3a | ≥ $10^8$ Ω | ≥ $10^8$ Ω | |
| Contact resistance | DIN EN 60512-2-1, Test 2a | ≤ 5 m Ω | ≤ 5 m Ω | |
| **Climatic Characteristics** | | | | |
| Climatic category | DIN EN 60068-1 | 40 / 100 / 56 | 40 / 125 / 56 | |
| Operating temperature | | -40°C ... +100°C | -40°C ... +125°C | |
| **Mechanical Characteristics** | | | | |
| IP-degree of protection | DIN EN 60529 | IP 65 / IP 67 | | |
| Insertion and withdrawal force | DIN EN 60512-13-2, Test 13b | ≤ 15 N | ≤ 30 N | |
| Mechanical operation | DIN EN 60512-9-1, Test 9a | ≥ 500 mating cycles | | |
| **Materials** | | | | |
| Housing material | | PA 6.6 / PA 6 | | |
| Dielectric material | | PA 6.6 / PA 6 | | |
| Gasket material | | Neoprene | | |
| Contact plating | | silver plated / gold plated | | |
| **Other Characteristics** | | | | |
| Termination technique | | screw | solder | crimp |
| Wire gauge / AWG | | max. 2,5 mm² AWG 14 | 0,75 mm² AWG 20 | 0,14 - 1,5 mm² AWG 26-16 |
| Flammability | UL 94 | VO | | |
| Locking system | | round thread | | |
| UL | UL 1977 | Conditions of acceptability | | |

[1)] DIN EN 60664-1 ≙ VDE 0110-1 ≙ IEC 60664-1

The stated technical values refer to the use as connector.
If these components are used as plug and socket device a reduced current carrying capacity has to be considered. The characteristics have to be requested from the manufacturer.

## Derating Curves

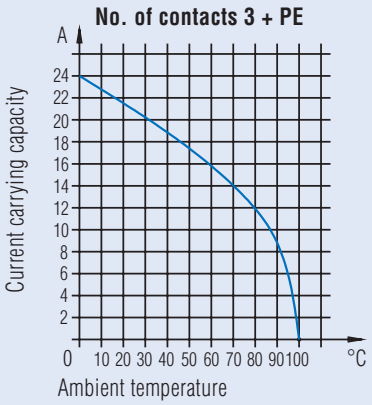


all contacts under load
wire gauge 2,5 mm², 14 AWG

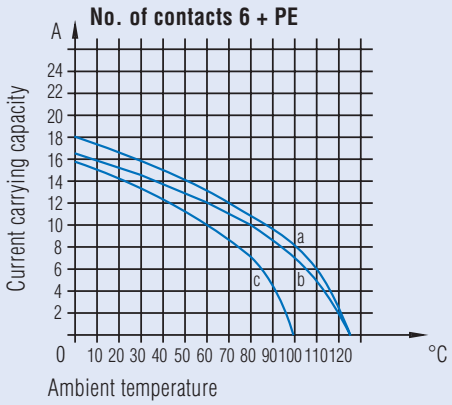


all contacts under load
a) wire gauge 1,5 mm², 16 AWG, stamped crimp contacts
b) wire gauge 0,75 mm², 20 AWG, stamped solder contacts
c) wire gauge 0,75 mm², turned solder contacts

## Order Information

**Contact plating**
The standard plating is silver. Gold plated contacts are available upon request. Min order quantity = 100 pcs. per type.

**Color coding**
Upon request the coupling ring of the plugs and the housings of the receptacles can be delivered in the colors red, green, blue, yellow and grey.
Min order quantity = 250 pcs. per type.

**Mechanical coding**
Achieved with special coding pins which are inserted into contact cavities.
Min. order quantitiy = 250 pcs. per type.

**Crimp version**
Order number do not include crimp contacts. Please order separately (see page 10).

**Crimp tooling**
Ask for our catalogue "Tools"

## Product Number Configuration

C016 – Series

30 – Termination Technique
10 = Crimp (6 + PE)
20 = Screw (3 + PE)
30 = Solder (6 + PE)

D – Style
H = Male cable connector
D = Female cable connector
K = Right angled male cable connector
F = Right angled female cable connector
C = Male receptacle
G = Female receptacle

006 – Number of Poles
003 = 3 + PE
006 = 6 + PE

1 – Contact Plating
1 = silver plated
2 = gold plated
0 = without contacts

00 – Strain relief
00 = Receptacle or cable connector with clamping ring
10 = Cable connector with internal strain relief

10 – Version
10 = Cable connector in blue/black
12 = Cable connector or receptacle in black
15 = EMI (metallized)

The example shows a female cable connector 6 + PE with solder termination.

Index

Male cable connector straight,
with internal strain relief clamp and/or
clamping ring, cable diameter 6 - 12,5 mm

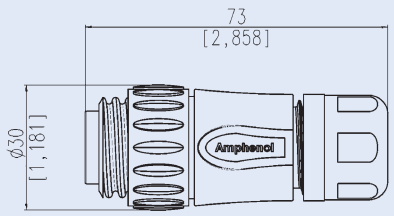

| No. of contacts | Termination technique | Back shell color | Part number Strain relief with clamping ring Contact plating | | Part number Internal strain relief + clamping ring Contact plating | |
|---|---|---|---|---|---|---|
| | | | Silver plated | Gold plated | Silver plated | Gold plated |
| 3 + PE | screw | blue | C016 20H003 100 10 | C016 20H003 200 10 | C016 20H003 110 10 | C016 20H003 210 10 |
| 3 + PE | screw | black | C016 20H003 100 12 | C016 20H003 200 12 | C016 20H003 110 12 | C016 20H003 210 12 |
| 6 + PE | solder | blue | C016 30H006 100 10 | C016 30H006 200 10 | C016 30H006 110 10 | C016 30H006 210 10 |
| 6 + PE | solder | black | C016 30H006 100 12 | C016 30H006 200 12 | C016 30H006 110 12 | C016 30H006 210 12 |
| 6 + PE | crimp[1] | blue | C016 10H006 000 10 | C016 10H006 000 10 | C016 10H006 010 10 | C016 10H006 010 10 |
| 6 + PE | crimp[1] | black | C016 10H006 000 12 | C016 10H006 000 12 | C016 10H006 010 12 | C016 10H006 010 12 |

Male cable connector right angled,
strain relief with clamping ring
cable diameter 6 - 12,5 mm

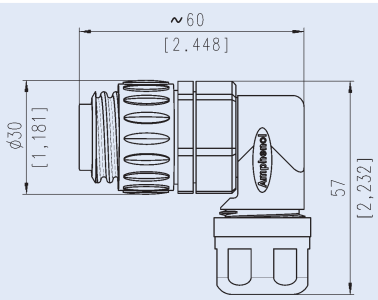

| No. of contacts | Termination technique | Back shell color | Part number Strain relief with clamping ring Contact plating | |
|---|---|---|---|---|
| | | | Silver plated | Gold plated |
| 3 + PE | screw | blue | C016 20K003 100 10 | C016 20K003 200 10 |
| 3 + PE | screw | black | C016 20K003 100 12 | C016 20K003 200 12 |
| 6 + PE | solder | blue | C016 30K006 100 10 | C016 30K006 200 10 |
| 6 + PE | solder | black | C016 30K006 100 12 | C016 30K006 200 12 |
| 6 + PE | crimp[1] | blue | C016 10K006 000 10 | C016 10K006 000 10 |
| 6 + PE | crimp[1] | black | C016 10K006 000 12 | C016 10K006 000 12 |

Female receptacle, screw termination
(3+PE), solder termination or
crimp version (6+PE)

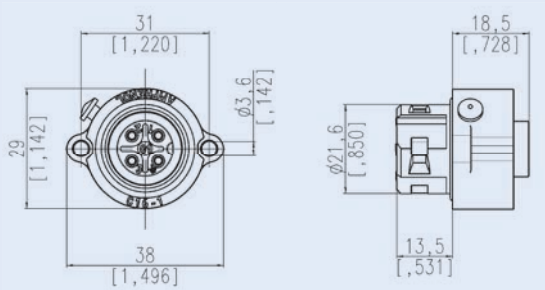

| No. of contacts | Termination technique | Back shell color | Part number Contact plating | |
|---|---|---|---|---|
| | | | Silver plated | Gold plated |
| 3 + PE | screw | black | C016 20G003 100 12 | C016 20G003 200 12 |
| 6 + PE | solder | black | C016 30G006 100 12 | C016 30G006 200 12 |
| 6 + PE | crimp[1] | black | C016 10G006 000 12 | C016 10G006 000 12 |

Mounting
cut-out[2]




For sealing reason
this surface needs
to be level and
free of burrs.

[1] Crimp contacts see page 10 / Crimp tooling see catalogue "Tools". [2] Mounting hole Ø 22 without chamfer, suitable sealing for screws is necessary.

Female cable connector straight,
with internal strain relief clamp and/or
clamping ring, cable diameter 6 - 12,5 mm

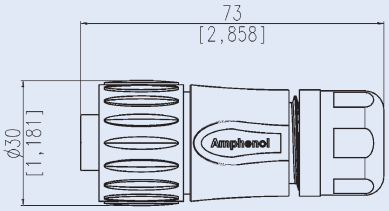

| No. of contacts | Termination technique | Back shell color | Part number Strain relief with clamping ring Contact plating | | Part number Internal strain relief + clamping ring Contact plating | |
|---|---|---|---|---|---|---|
| | | | Silver plated | Gold plated | Silver plated | Gold plated |
| 3 + PE | screw | blue | C016 20D003 100 10 | C016 20D003 200 10 | C016 20D003 110 10 | C016 20D003 210 10 |
| 3 + PE | screw | black | C016 20D003 100 12 | C016 20D003 200 12 | C016 20D003 110 12 | C016 20D003 210 12 |
| 6 + PE | solder | blue | C016 30D006 100 10 | C016 30D006 200 10 | C016 30D006 110 10 | C016 30D006 210 10 |
| 6 + PE | solder | black | C016 30D006 100 12 | C016 30D006 200 12 | C016 30D006 110 12 | C016 30D006 210 12 |
| 6 + PE | crimp[1] | blue | C016 10D006 000 10 | C016 10D006 000 10 | C016 10D006 010 10 | C016 10D006 010 10 |
| 6 + PE | crimp[1] | black | C016 10D006 000 12 | C016 10D006 000 12 | C016 10D006 010 12 | C016 10D006 010 12 |

Female cable connector right angled,
strain relief with clamping ring
cable diameter 6 - 12,5 mm

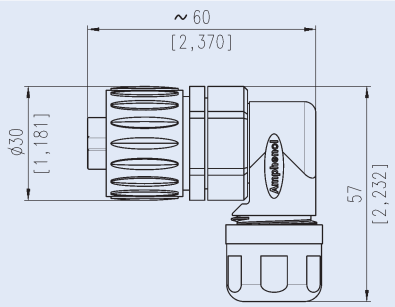

| No. of contacts | Termination technique | Back shell color | Part number Strain relief with clamping ring Contact plating | |
|---|---|---|---|---|
| | | | Silver plated | Gold plated |
| 3 + PE | screw | blue | C016 20F003 100 10 | C016 20F003 200 10 |
| 3 + PE | screw | black | C016 20F003 100 12 | C016 20F003 200 12 |
| 6 + PE | solder | blue | C016 30F006 100 10 | C016 30F006 200 10 |
| 6 + PE | solder | black | C016 30F006 100 12 | C016 30F006 200 12 |
| 6 + PE | crimp[1] | blue | C016 10F006 000 10 | C016 10F006 000 10 |
| 6 + PE | crimp[1] | black | C016 10F006 000 12 | C016 10F006 000 12 |

Male receptacle, screw termination
(3+PE), solder termination or
crimp version (6+PE)

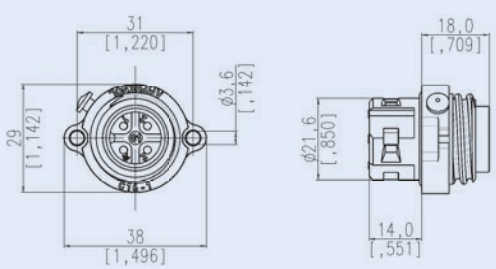

| No. of contacts | Termination technique | Back shell color | Part number Contact plating | |
|---|---|---|---|---|
| | | | Silver plated | Gold plated |
| 3 + PE | screw | black | C016 20C003 100 12 | C016 20C003 200 12 |
| 6 + PE | solder | black | C016 30C006 100 12 | C016 30C006 200 12 |
| 6 + PE | crimp[1] | black | C016 10C006 000 12 | C016 10C006 000 12 |

Mounting
cut-out[2]




For sealing reason
this surface needs
to be level and
free of burrs.

[1] Crimp contacts see page 10 / Crimp tooling see catalogue “Tools”. [2] Mounting hole Ø 22 without chamfer, suitable sealing for screws is necessary.

Stamped single contacts

Stamped contacts on reel
for hand crimping tools
200 pcs.

Stamped contacts on reel for crimping machines

2000 pcs.
feeds to the right

2000 pcs.
feeds to the left

**Crimp Contacts, Pin, Standard**

| Contact Ø in mm | Isolation Ø in mm | No. of contacts | Wire gauge | Supplied as | Pieces | Part number Contact plating | |
|---|---|---|---|---|---|---|---|
| | | | | | | Silver plated | Gold plated |
| 1,6 | 1,0 - 2,0 | 6 + PE | 0,14 - 0,5 $mm^2$ | Single contact | 100 | VN 01 016 0011 (1) | VN 01 016 0011 (2) |
| | | | | Contact on reel | 200 | ZN 01 016 0011 (1) | ZN 01 016 0011 (2) |
| | | | | right | 2000 | HN 01 016 0011 (1) | HN 01 016 0011 (2) |
| | | | | left | 2000 | TN 01 016 0011 (1) | TN 01 016 0011 (2) |
| 1,6 | 1,8 - 2,8 | 6 + PE | 0,5 - 1,5 $mm^2$ | Single contact | 100 | VN 01 016 0004 (1) | VN 01 016 0004 (2) |
| | | | | Contact on reel | 200 | ZN 01 016 0004 (1) | ZN 01 016 0004 (2) |
| | | | | right | 2000 | HN 01 016 0004 (1) | HN 01 016 0004 (2) |
| | | | | left | 2000 | TN 01 016 0004 (1) | TN 01 016 0004 (2) |

**Crimp Contacts, Socket, Standard**

| Contact Ø in mm | Isolation Ø in mm | No. of contacts | Wire gauge | Supplied as | Pieces | Part number Contact plating | |
|---|---|---|---|---|---|---|---|
| | | | | | | Silver plated | Gold plated |
| 1,6 | 1,0 - 2,0 | 6 + PE | 0,14 - 0,5 $mm^2$ | Single contact | 100 | VN 02 016 0003 (1) | VN 02 016 0003 (2) |
| | | | | Contact on reel | 200 | ZN 02 016 0003 (1) | ZN 02 016 0003 (2) |
| | | | | right | 2000 | HN 02 016 0003 (1) | HN 02 016 0003 (2) |
| | | | | left | 2000 | TN 02 016 0003 (1) | TN 02 016 0003 (2) |
| 1,6 | 1,8 - 2,8 | 6 + PE | 0,5 - 1,5 $mm^2$ | Single contact | 100 | VN 02 016 0002 (1) | VN 02 016 0002 (2) |
| | | | | Contact on reel | 200 | ZN 02 016 0002 (1) | ZN 02 016 0002 (2) |
| | | | | right | 2000 | HN 02 016 0002 (1) | HN 02 016 0002 (2) |
| | | | | left | 2000 | TN 02 016 0002 (1) | TN 02 016 0002 (2) |

High current crimp contacts upon request.

**Tools**



Find our tools in the catalogue “Tools”.

Index

| Description | Figure | Part number | Figure | Part number |
|---|---|---|---|---|
| Protecitve cover for male cable connector and male receptacle |  | for male cable connector<br>C016 00U000 010 12 |  | for male receptacle<br>C016 00U000 000 12 |
| Protective cover for female cable connector and female receptacle |  | for female cable connector<br>C016 00V000 010 12 |  | for female receptacle<br>C016 00V000 000 12 |

## Mounting of the protective covers on the back shell, male or female receptacles

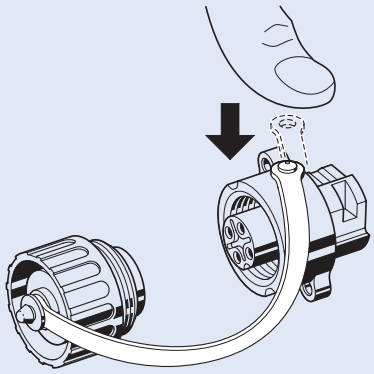

| Description | Figure | Part number |
|---|---|---|
| Back shell,<br>right angled with clamping ring<br>Packaging unit 10 pcs. | | Back shell color:<br>blue: C016 G09 042 G10 X [1]<br>black: C016 G09 041 G10 X [1] |
| Cable clamp<br>for all straight cable connectors,<br>Packaging units 10 pcs. |  | Cable clamp diameter<br>Ø 6 - 10<br>N 16 110 2000 X [1] |

[1] X is synonymous for packaging unit 10 pcs.

Index

## Mounting Instruction, straight cable connector

| Stripping Lengths | Measure a [1] | Measure b |
|---|---|---|
| Screw contacts | | |
| with internal cable retention | 18 +1 | 7 +1 [2] |
| without internal cable retention | 25 +1 | 7 +1 [2] |
| Solder contacts | | |
| with internal cable retention | 14 +1 | 4 +1 |
| without internal cable retention | 22 +1 | 4 +1 |
| Crimp contacts 0,14 – 0,50 mm² | | 3 +0,5 |
| 0,50 – 1,5 mm² | | 3,5 +1 |
| with internal cable retention | 14 +1 | |
| without internal cable retention | 22 +1 | |

1) PE + 2mm 2) end splice recommended

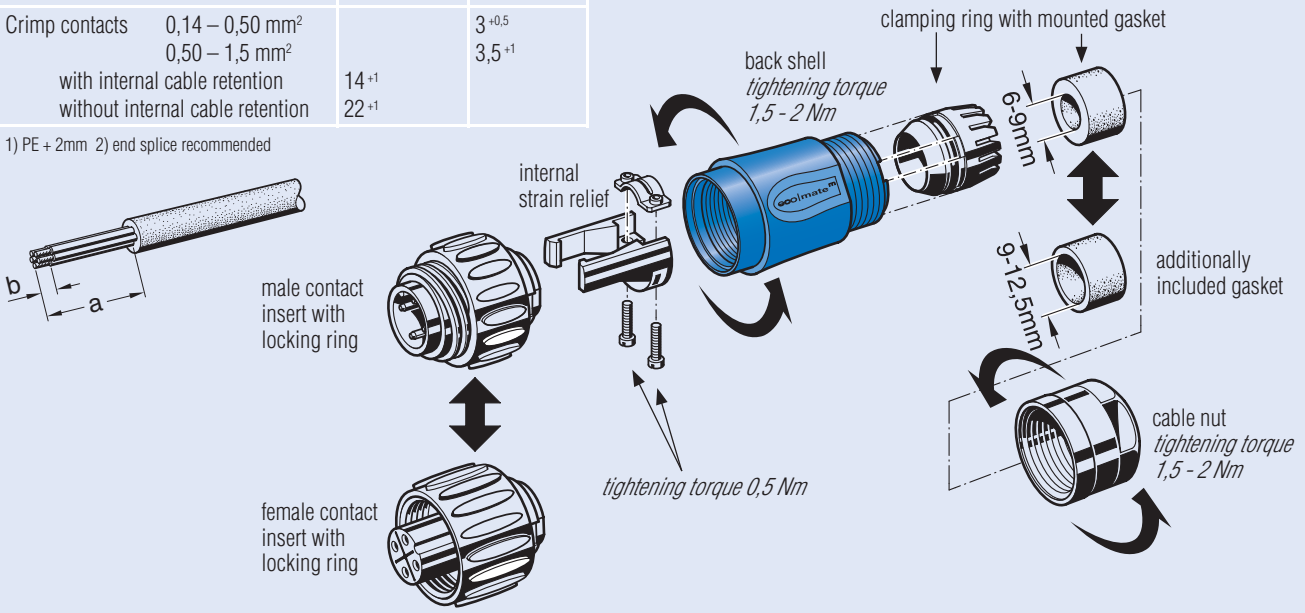


## Mounting Instruction, right angled cable connector

| Stripping Lengths | Measure a [1] | Measure b |
|---|---|---|
| Screw contacts | | |
| without internal cable retention | 35 +1 | 7 +1 [2] |
| Solder contacts | | |
| without internal cable retention | 32 +1 | 4 +1 |
| Crimp contacts 0,14 – 0,5 mm² | | 3 +0,5 |
| 0,50 – 1,5 mm² | | 3,5 +1 |
| without internal cable retention | 32 +1 | |

1) PE + 2mm 2) end splice recommended

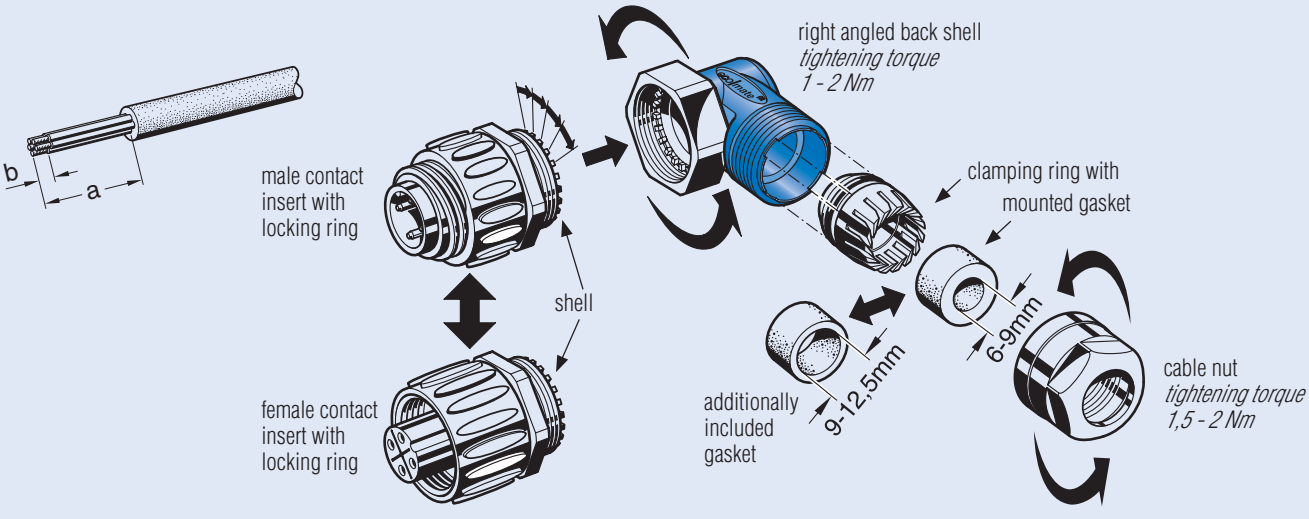

## Screw Termination

Screw clamps are designed acc. to EN 60999-1/VDE 06095.1. Chart 1 below shows the screw size depending on wire size and the required clamping and testing torque.

### Chart 1

| | | |
|---|---|---|
| Wire size (mm²) | 1,5 | 2,5 |
| Screw size | M 3 | M 3 |
| Test torque (Ncm) | 50 | 50 |

Diagram 1 below shows the range of tensile strength for a screw connection with a clamp screw M3, fastened with a torque of 50 Ncm, depending on the wire size.

### Diagram 1

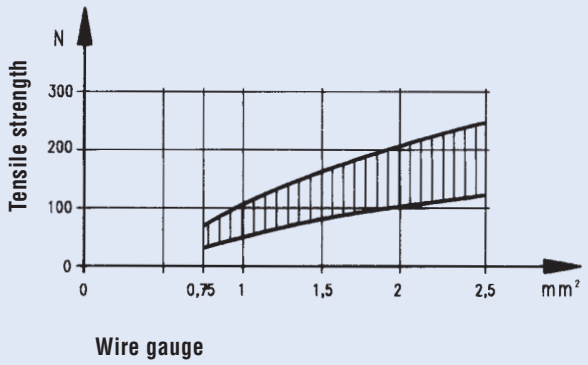


This comparison chart allows a cross reference between American Wire Gauge (AWG) and metric wire sizes (mm²).

### Chart 2

| AWG | Wire composition | Wire diameter | Wire size |
|---|---|---|---|
| 30 | 1 x 0,25<br>7 x 0,10 | 0,25 mm<br>0,36 mm | 0,05 mm²<br>0,06 mm² |
| 28 | 1 x 0,32<br>7 x 0,13 | 0,32 mm<br>0,38 mm | 0,08 mm²<br>0,09 mm² |
| 26 | 1 x 0,40<br>7 x 0,16<br>19 x 0,10 | 0,40 mm<br>0,48 mm<br>0,51 mm | 0,13 mm²<br>0,14 mm²<br>0,15 mm² |
| 24 | 1 x 0,51<br>7 x 0,20<br>19 x 0,13 | 0,51 mm<br>0,61 mm<br>0,64 mm | 0,21 mm²<br>0,23 mm²<br>0,24 mm² |
| 22 | 1 x 0,64<br>7 x 0,25<br>19 x 0,16 | 0,64 mm<br>0,76 mm<br>0,81 mm | 0,33 mm²<br>0,36 mm²<br>0,38 mm² |
| 20 | 1 x 0,81<br>7 x 0,32<br>19 x 0,20 | 0,81 mm<br>0,97 mm<br>1,02 mm | 0,52 mm²<br>0,56 mm²<br>0,62 mm² |
| 18 | 1 x 1,02<br>19 x 0,25 | 1,02 mm<br>1,27 mm | 0,79 mm²<br>0,96 mm² |
| 16 | 19 x 0,29 | 1,44 mm | 1,23 mm² |
| 14 | 19 x 0,36 | 1,80 mm | 1,95 mm² |
| 12 | 19 x 0,46 | 2,29 mm | 3,09 mm² |
| 10 | 37 x 0,40 | 3,10 mm | 4,60 mm² |
| 8 | 133 x 0,29 | 4,0 mm | 8,80 mm² |
| 6 | 133 x 0,36 | 5,5 mm | 13,5 mm² |

It is to be noted that wires of the same AWG number but with different composition have slightly different mm².

Index

## Crimp Termination

A crimp connection is a non-detachable electrical connection between a wire and a crimp contact produced with the crimp technology.
Precise crimping dies which are matched to the crimp barrel and the wire size and a defined deformation result in a reliable electrical connection.
There are open crimp barrels (stamped contacts) and closed crimp barrels (turned contacts).

The main advantages of crimp connections are:
- Efficient termination of contacts
- Reproducible terminations achieve consistent electrical and mechanical results

The requirements for crimp connections are defined in IEC 60352 Part 2 / DIN EN 60352 Part 2.

An important point of the quality of a crimp connection is the achieved tensile strength of the termination.
Easily measured, the tensile strength is a practible means for quality control purposes.
Diagram 2 below shows the required minimum tensile strength for open and closed barrels depending on the wire size.

**Assembly instructions**
For crimp contacts use the released crimp tool.

The insertion and extraction of crimp contacts shall only be approved with the corresponding insertion/extraction tool.

**A detailed description of the crimp technology can be found in our crimp tooling catalogues.**

**Crimp contacts are in this catalogue on page 10.**

**Diagram 2**

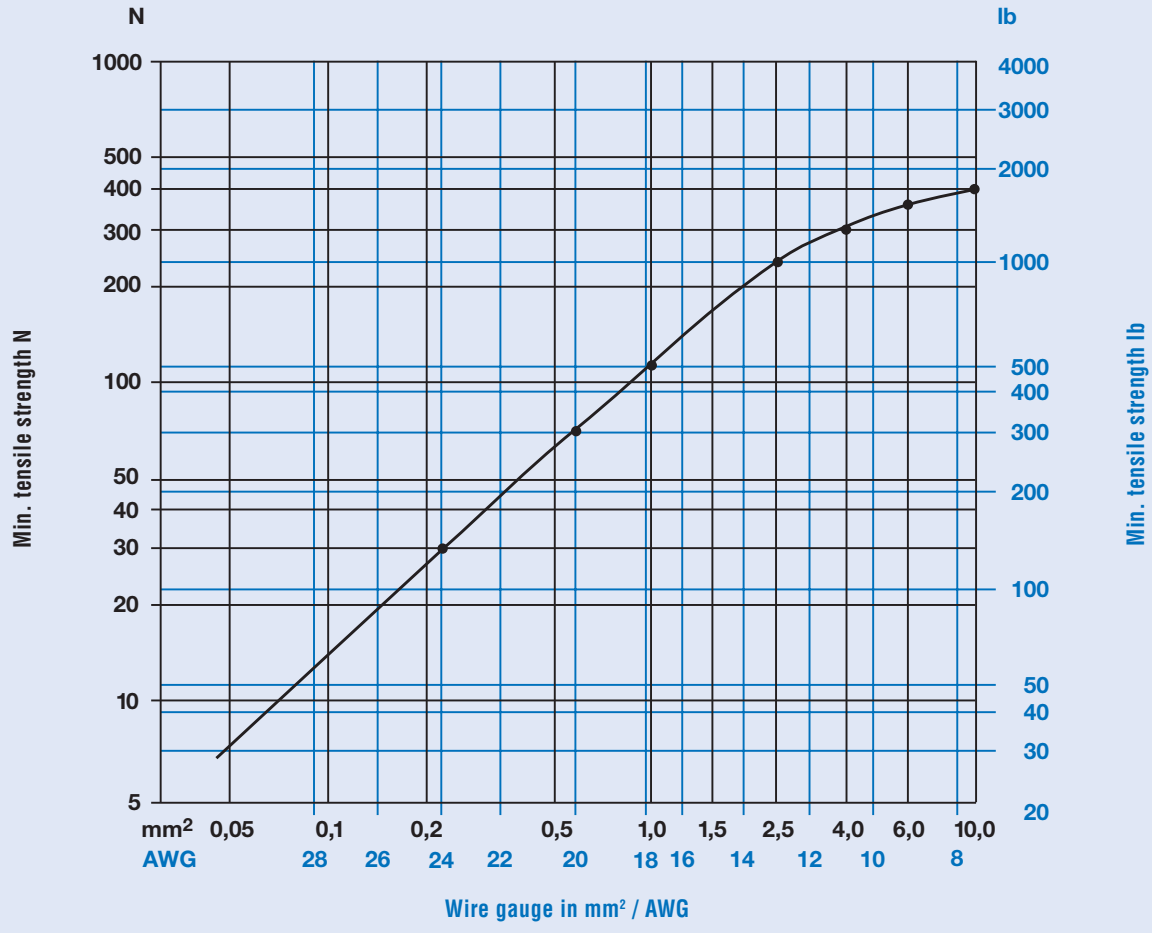

## Degree of Protection

Electrical devices to which connectors belong to have to be protected for safety reasons from outside influences like dust, foreign objects, direct contact, moisture and water. This protection is provided on industrial connectors by its housings with their latching devices and sealed cable entries. The degree of protection can be selected depending on the type of intended use. The standard IEC 60529 and/or DIN EN 60529/VDE 0470 Part 1 has specified the degree of protection and divided into several classes.

The degree of protection is indicated in the following way:

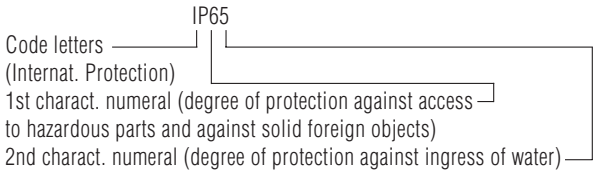


The following charts 4 an 5 give an overview about all protection degrees.

**Chart 4**

| 1st charact. numeral | Brief description | Definition |
|---|---|---|
| 0 | Non-protected | – |
| 1 | Protected against access to hazardous parts with the back of a hand. Protected against solid foreign objects of ≥ 50mm Ø. | The probe, sphere of 50mm Ø, shall not fully penetrate and shall have adequate clearance from hazardous parts. |
| 2 | Protected against access to hazardous parts with a finger. Protected against solid foreign objects of ≥ 12,5mm Ø. | The jointed test finger of 12mm Ø, 80mm length, shall have adequate clearance from hazardous parts. The probe, sphere of 12,5mm Ø, shall not fully penetrate. |
| 3 | Protected against access to hazardous parts with a tool. Protected against solid foreign objects of ≥ 2,5mm Ø. | The probe of 2,5mm Ø shall not penetrate at all. |
| 4 | Protected against access to hazardous parts with a wire. Protected against solid foreign objects of ≥ 1mm Ø. | The probe of 1mm Ø shall not penetrate at all. |
| 5 | Protected against access to hazardous parts with a wire. Dust-protected. | The probe of 1mm Ø shall not penetrate. Intrusion of dust is not totally prevented, but dust shall not penetrate in a quantity to interfere with satisfactory operation of the device or to impair safety. |
| 6 | Protected against access to hazardous parts with a wire Dust-tight. | The probe of 1mm Ø shall not penetrate. No intrussion of dust. |

**Chart 5**

| 2nd charact. numeral | Brief description | Definition |
|---|---|---|
| 0 | Non-protected | – |
| 1 | Protected against vertically falling water drops | Vertically falling drops shall have no harmful effects. |
| 2 | Protected against vertically falling water drops when enclosure tilted up to 15° | Vertically falling drops shall have no harmful effects when the enclosure is tilted at any angel up to 15° on either side of the vertical. |
| 3 | Protected against spraying water | Water sprayed at an angle up to 60° on either side of the vertical shall have no harmful effects. |
| 4 | Protected against splashing water | Water splashed against the enclosure from any direction shall have no harmful effects. |
| 5 | Protected against water jets | Water projected in jets against the enclosure from any direction shall have no harmful effects. |
| 6 | Protected against powerful water jets | Water projected in powerful jets against the enclosure from any direction shall have no harmful effects. |
| 7 | Protected against the effects of temporary immersion in water | Intrusion of water in quantities causing harmful effects shall not be possible when the enclosure is temporalily immersed in water for 30 min. in 1m depth. |
| 8 | Protected against the effects of continous immersion in water | Intrusion of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be agreed between manufacturer and user but which are more severe than for numeral 7. |
| 9K [1)] | Protected against water during high pressure/steam jet cleaning | Water projected in powerful jets with high pressure against the enclosure from any direction shall have no harmful effects. |

[1)] Remark: Numeral acc. to DIN 40050 part 9, vehicles IP code.

## 1. General Remarks

These connectors are designed and produced in conformity with the low voltage directive (73/23/EWG) respectively Gerätesicherheitsgesetz (German law) and are especially in accordance with the standards DIN EN 61984 / IEC 61984 (VDE0627); IEC 60664-1 (VDE 0110-1) and IEC 60529.
The connectors may be used only within the technical ratings.
All technical data refer to mated connectors under live conditions.
The safety of the connector system depends on the correct selection of products, proper assembly of the connector device and a precise fit of the connectors.

## 2. Application Remarks

Connectors with / without breaking capacity must be used according to specified technical ratings.
The technical data represents the initial value of mated parts under predetermined conditions and length of time.These values could change with different test parameters or product requirements.
The connectors of the eco|mate m series are designed for the areas of application including the construction and installation of controlling and electrical devices.
The product has been tested for the intended purposes only. If the connection is used other than originally intended, or in another manner that we have not previously tested, the consumer assumes full responsibility.

All rated data for the connectors listed in this catalogue are based on over-voltage category III [1] and pollution degree 3 [2] for electronic applications. Connectors were completely mated according to their respective safety locking mechanism. Selection and testing of connectors with / without breaking capacity to meet specific product or industrial requirements such as rated voltage and the related clearances and creepage distances are the responsibility of the user.

## 3. Assembling Remarks

Protection against electrical shock of the termination of the connectors shall be secured by correct mounting. Connectors of the same or different series being mounted side by side may be protected against incorrect mating by the use of coding options. Care must be taken to ensure the parts are correctly mated and screws are tightened with the proper torque.

## 4. Termination Remarks

Cable connectors are effectively secured when using the strain relief (internal strain relief clamp or clamping ring). When the connector contains a simple gland bushing for retention without clamping ring the cable should have a strain relief close behind the connector. All cable properties or specifications must be compatible with the connector design and materials.
Designated wire conductors must be terminated to the correct poles in the connector.
Crimp contacts must be fully inserted into the plastic housing and strain relief assured with a slight tug on the wire.
Wire should be stripped correctly according to printed specifications to insure no electrical contact can be made between the conductors. There should be no nicked or cut strains during the stripping action.

## 5. Safety Classification acc. to DIN EN 61984 / VDE 0627 / IEC 61984

| Style | enclosed mated | enclosed unmated | protective earthing contact | finger safety mated | finger safety unmated | hand back safety mated | connector with breaking capacity [1] | rewirable | Cable clamp | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | with | without |
| Male cable connector | • | • | • | • | NA | • | • | • | • | • |
| Female cable connector | • | | • | • | • | • | • | • | • | • |
| Male receptacle screw / crimp | • | • | • | • | NA | • | • | • | | • |
| Female receptacle screw / crimp | • | | • | • | • [3] | • | • | • | | • |
| Male receptacle solder | • | • | • | • [3] | NA | • [3] | • | • | | • |
| Female receptacle solder | • | | • | • [3] | • [3] | • [3] | • | • | | • |

[1] Overvoltage category III: Equipment intended for the use in installations or parts of it in which lightning overvoltages do not need to be considered, however switching overvoltages generated by the equipment, and for cases where the reliability and the availability of the equipment or its dependent circuits are subject to special requirements. Examples are protecting means, switches and sockets.

[2] Pollution degree 3: Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.

[3] Protection against electrical shock of the termination of the connectors shall be secured by correct mounting.

NA ≙ not applicable

Index

| Part No. | Page | Part No. | Page | Part No. | Page | Part No. | Page |
|---|---|---|---|---|---|---|---|
| C016 00U000 000 12 | 11 | C016 20F003 100 10 | 9 | C016 30F006 100 10 | 9 | N 16 110 2000 X | 11 |
| C016 00U000 010 12 | 11 | C016 20F003 100 12 | 9 | C016 30F006 100 12 | 9 | TN 01 016 0004 (1) | 10 |
| C016 00V000 000 12 | 11 | C016 20F003 200 10 | 9 | C016 30F006 200 10 | 9 | TN 01 016 0004 (2) | 10 |
| C016 00V000 010 12 | 11 | C016 20F003 200 12 | 9 | C016 30F006 200 12 | 9 | TN 01 016 0011 (1) | 10 |
| C016 10C006 000 12 | 9 | C016 20G003 100 12 | 8 | C016 30G006 100 12 | 8 | TN 01 016 0011 (2) | 10 |
| C016 10D006 000 10 | 9 | C016 20G003 200 12 | 8 | C016 30G006 200 12 | 8 | TN 02 016 0002 (1) | 10 |
| C016 10D006 000 12 | 9 | C016 20H003 100 10 | 8 | C016 30H006 100 10 | 8 | TN 02 016 0002 (2) | 10 |
| C016 10D006 010 10 | 9 | C016 20H003 100 12 | 8 | C016 30H006 100 12 | 8 | TN 02 016 0003 (1) | 10 |
| C016 10D006 010 12 | 9 | C016 20H003 110 10 | 8 | C016 30H006 110 10 | 8 | TN 02 016 0003 (2) | 10 |
| C016 10F006 000 10 | 9 | C016 20H003 110 12 | 8 | C016 30H006 110 12 | 8 | VN 01 016 0004 (1) | 10 |
| C016 10F006 000 12 | 9 | C016 20H003 200 10 | 8 | C016 30H006 200 10 | 8 | VN 01 016 0004 (2) | 10 |
| C016 10G006 000 12 | 8 | C016 20H003 200 12 | 8 | C016 30H006 200 12 | 8 | VN 01 016 0011 (1) | 10 |
| C016 10H006 000 10 | 8 | C016 20H003 210 10 | 8 | C016 30H006 210 10 | 8 | VN 01 016 0011 (2) | 10 |
| C016 10H006 000 12 | 8 | C016 20H003 210 12 | 8 | C016 30H006 210 12 | 8 | VN 02 016 0002 (1) | 10 |
| C016 10H006 010 10 | 8 | C016 20K003 100 10 | 8 | C016 30K006 100 10 | 8 | VN 02 016 0002 (2) | 10 |
| C016 10H006 010 12 | 8 | C016 20K003 100 12 | 8 | C016 30K006 100 12 | 8 | VN 02 016 0003 (1) | 10 |
| C016 10K006 000 10 | 8 | C016 20K003 200 10 | 8 | C016 30K006 200 10 | 8 | VN 02 016 0003 (2) | 10 |
| C016 10K006 000 12 | 8 | C016 20K003 200 12 | 8 | C016 30K006 200 12 | 8 | ZN 01 016 0004 (1) | 10 |
| C016 20C003 100 12 | 9 | C016 30C006 100 12 | 9 | C016 G09 041 G10 X | 11 | ZN 01 016 0004 (2) | 10 |
| C016 20C003 200 12 | 9 | C016 30C006 200 12 | 9 | C016 G09 042 G10 X | 11 | ZN 01 016 0011 (1) | 10 |
| C016 20D003 100 10 | 9 | C016 30D006 100 10 | 9 | HN 01 016 0004 (1) | 10 | ZN 01 016 0011 (2) | 10 |
| C016 20D003 100 12 | 9 | C016 30D006 100 12 | 9 | HN 01 016 0004 (2) | 10 | ZN 02 016 0002 (1) | 10 |
| C016 20D003 110 10 | 9 | C016 30D006 110 10 | 9 | HN 01 016 0011 (1) | 10 | ZN 02 016 0002 (2) | 10 |
| C016 20D003 110 12 | 9 | C016 30D006 110 12 | 9 | HN 01 016 0011 (2) | 10 | ZN 02 016 0003 (1) | 10 |
| C016 20D003 200 10 | 9 | C016 30D006 200 10 | 9 | HN 02 016 0002 (1) | 10 | ZN 02 016 0003 (2) | 10 |
| C016 20D003 200 12 | 9 | C016 30D006 200 12 | 9 | HN 02 016 0002 (2) | 10 | | |
| C016 20D003 210 10 | 9 | C016 30D006 210 10 | 9 | HN 02 016 0003 (1) | 10 | | |
| C016 20D003 210 12 | 9 | C016 30D006 210 12 | 9 | HN 02 016 0003 (2) | 10 | | |


Index

# International

**Argentina**
Amphenol Argentina
Av. Callao 930
2nd Floor Office B "Plaza"
C1023 AAP Buenos Aires
Phone +54 / 11 / 4815 6886
Fax +54 / 11 / 4814 57 79

**Australia**
Amphenol Australia Ltd.
2 Fiveways Blvd
Keysborough
Victoria 31 73
Phone +61 / 3 / 8796 / 8888
Fax +61 / 3 / 8796 / 8801

**Austria**
Amphenol-Tuchel Austria
Lannerweg 14
A-4614 Marchtrenk
Phone +43 / 7243 / 52555
Fax +43 / 7243 / 53535

**Belgium**
Amphenol-Tuchel Belgium
Brusselbaan 524b
B 1600 Sint-Pieters-Leeuw
Phone +32 / 2377 / 2549
Fax +32 / 2377 / 5303

**Brasilia**
Amphenol do Brasil Ltda.
Rua Diogo Moreira 132, 20th Floor
CEP 05423-010 Sao Paulo SP
Phone +55 / 11 / 3815.1003
Fax +55 / 11 / 3815.1629

**China**
Amphenol-Tuchel Electronics GmbH
China Branch
210-1 Taishan Road
Changzhou 213022
Phone +86 / 0519 / 5110301
Fax +86 / 0519 / 5110299

**France**
Amphenol-Tuchel France
Bât. Le Newton C
7 Mail B. Thimonnier
77185 Lognes
Phone +33 / 164627676
Fax +33 / 164627677

**Germany**
Amphenol-Tuchel Electronics GmbH
August-Haeusser-Str. 10
74080 Heilbronn
Phone +49 / 7131 / 929-0
Fax +49 / 7131 / 929-486

**Great Britain**
Amphenol-Tuchel Great Britain
14 Plover Close
Kempshott, Basingstoke
Hants, RG22 5PQ
Phone +44 / 1256 / 330749
Fax +44 / 1256 / 330749

**Hong Kong**
Amphenol East Asia Limited
Units 2201-02, Railway Plaza
39 Chatham Road South
Tsimshatsui, Kowloon
Phone +852 / 2699 / 2663
Fax +852 / 2688 / 0974

**India**
Amphetronix Limited
Plot No. 105 Bhosari Industrial Area
Pune - 411 026
Phone +91 / 20 / 27121418
Fax +91 / 20 / 27120581

**Italy**
Amphenol-Tuchel Italy
Via Barbaiana n. 5
I-20020 Lainate (MI)
Phone +39 / 2 / 932 541
Fax +39 / 2 / 932 54444

**Japan**
Amphenol Japan, K.K.
2-3-27, Kudan Minami
Chiyoda-Ku
Tokyo 102
Phone +81 / 3 / 3263 / 5611
Fax +81 / 3 / 5276 / 7059

**Korea**
Amphenol DaeShin Limited
#802 Joong-Dong 1131-5
Wonmi-Ku
Bucheon-City
Kyunggi-Do
Korea 420-020
Phone +82 / 2 / 785 / 1588
Fax +82 / 2 / 589 / 1514

**Mexico**
Amphenol Mexico
Prolongacion Reforma 61 - 6 B2
Col. Paseo de las Lomas
C.P. 01330 Mexico D.F.
Phone +52 / 55 / 5258.9984
Fax +52 / 55 / 5081.6890

**Singapore**
Amphenol East Asia Limited
Asia Pacific Sales Operation
Singapore Branch
300 Beach Road
#25-07 The Concourse
Singapore 199555
Phone +27 / 11 / 305-9574
Fax +27 / 11 / 305-9576

**South Africa**
Amphenol International Ltd
Chislehurston
30 Impala Road
Chislehurston
Sandton, 2146
Phone +27 / 11 / 7839517
Fax +27 / 11 / 7839519

**Spain**
Amphenol-Tuchel Spain
Ctra Sabadell a Mollet,
km 4.5 Nave 5
08130 Santa Perpetua de
Mogoda (Barcelona)
Phone +34 / 93 / 574.41.34
Fax +34 / 93 / 574.10.09

**Sweden**
Amphenol-Tuchel Scandinavia
P.O. Box 20
SE 195 42 Märsta
Phone +46 / 8 591 / 175 76
Fax +46 / 8 591 / 175 76

**Taiwan**
Amphenol East Asia Ltd.
Taiwan Branch (H.K.)
116 Zhong Shan Road
Lane 956 Taoyuan City
Taiwan R.O.C. 330
Phone +886 / 3 / 370 / 7855
Fax +886 / 3 / 360 / 7259

**Turkey**
Amphenol Turkiye
Ayazaga Mah. Meydan Sk. No. 28
Beybi Giz Plaza, Kat. 26
34396 Maslak/Istanbul
Phone +90 / 0212 / 3352501
Fax +90 / 0212 / 3352500

**USA**
Amphenol-Tuchel Electronics
6900 Haggerty Road
Suite 200
Canton, Michigan 48187
Phone +1 / 734 / 4516400
Fax +1 / 734 / 451 7197

Amphenol Corporation
Corporate Headquarters
358 Hall Avenue
Wallingford, CT 06492
Phone +1 / 800 / 380 8052
Phone +1 / 203 / 265 / 8900
Fax +1 / 203 / 265 / 8628

Your engineering sales representative:

ATE 2201 0905 2.000
Printed on chlorin-free bleached paper, specifications may be changed without notice.
Copyright 09/05 by Amphenol-Tuchel Electronics GmbH, Germany

# Amphenol

Amphenol-Tuchel Electronics GmbH
August-Haeusser-Str. 10 · D-74080 Heilbronn · Germany · Phone +49 (0) 71 31 / 9 29-0 · Fax +49 (0) 71 31 / 9 29-486 · www.amphenol.info

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.




**Как с нами связаться**

**Телефон:** 8 (812) 309 58 32 (многоканальный)
**Факс:** 8 (812) 320-02-42
**Электронная почта:** org@eplast1.ru
**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.