

Maxi-Mox

Precision Thick Film Axial Terminal High Voltage/High Resistance



Maxi-Mox resistors are also versatile. Suitable for industrial applications requiring still more power for high voltage switching, industrial control, and high voltage current limiting.

FEATURES

- Wide resistance ranges
- Voltage rating to 50KV
- Power rating to 12.5 watts
- Silicone or epoxy coating
- Non-inductive available

APPLICATIONS

- HV power supplies
- Power distribution
- Medical instrumentation
- Avionics

SERIES SPECIFICATIONS


| Ohmite Series | Resistance Range (Ω) | Power @70°C | Voltage Rating | Available Tolerances* | Capacitance (pf) |
|---|-------------------------------|-------------|----------------|-----------------------|------------------|
| • High-temperature (silicone coated) | | | | | |
| MOX-1-12 | 250 Ω to 300,000M | 2.5W | 10.0KV | 1% to 20% | 0.75 |
| MOX-2-12 | 500 Ω to 700,000M | 5.0W | 20.0KV | 1% to 20% | 0.60 |
| MOX-3-12 | 750 Ω to 1,000,000M | 7.5W | 30.0KV | 1% to 20% | 0.50 |
| MOX-4-12 | 1K to 1,000,000M | 10.0W | 40.0KV | 1% to 20% | 0.40 |
| MOX-5-12 | 1.25K to 1,000,000M | 12.5W | 50.0KV | 1% to 20% | 0.30 |
| • Standard (epoxy coated) @25°C | | | | | |
| MOX-1-13 | 250 Ω to 300,000M | 2.0W | 10.0KV | 0.1% to 20% | 0.75 |
| MOX-2-13 | 500 Ω to 700,000M | 3.0W | 20.0KV | 0.1% to 20% | 0.60 |
| MOX-3-13 | 750 Ω to 1,000,000M | 4.0W | 30.0KV | 0.1% to 20% | 0.50 |
| MOX-4-13 | 1K to 1,000,000M | 5.0W | 40.0KV | 0.1% to 20% | 0.40 |
| MOX-5-13 | 1.25K to 1,000,000M | 6.0W | 50.0KV | 0.1% to 20% | 0.30 |

*Some tolerances are not available over the entire resistance range.

CHARACTERISTICS

| | |
|--------------------------------|---|
| Core | Alumina |
| Resistor | Thick Film |
| Terminal | RoHS solder composition is 96% Sn, 3.5% Ag, 0.5% Cu |
| Resistance Range | 250 Ω to 1 Teraohm |
| Power Rating | 2.0W to 12.5W |
| Voltage Rating | 10KV to 50KV |
| Tolerance | 0.5% to 20%; not all tolerances available in all values |
| Operating Temperature | -55°C to +210°C |
| Temperature Coefficient | 25ppm/°C 0° to 85°C available |

DERATING

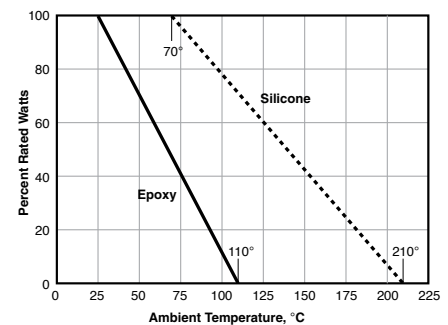

(continued)

Maxi-Mox

Precision Thick Film Axial Terminal High Voltage/High Resistance

DIMENSIONS

| Ohmite Series | Power | A max. (in/mm) | B max. (in/mm) |
|---|-------|-----------------|----------------|
| • High-temperature (silicone coated) | | | |
| MOX-1-12 | 2.5W | 1.120" / 28.45 | 0.310" / 7.87 |
| MOX-2-12 | 5.0W | 2.120" / 53.85 | 0.310" / 7.87 |
| MOX-3-12 | 7.5W | 3.120" / 79.24 | 0.310" / 7.87 |
| MOX-4-12 | 10.0W | 4.120" / 104.65 | 0.310" / 7.87 |
| MOX-5-12 | 12.5W | 5.120" / 130.05 | 0.310" / 7.87 |
| • Standard (epoxy coated) | | | |
| MOX-1-13 | 2.0W | 1.140" / 28.96 | 0.345" / 8.76 |
| MOX-2-13 | 3.0W | 2.140" / 54.36 | 0.345" / 8.76 |
| MOX-3-13 | 4.0W | 3.140" / 79.76 | 0.345" / 8.76 |
| MOX-4-13 | 5.0W | 4.140" / 105.16 | 0.345" / 8.76 |
| MOX-5-13 | 6.0W | 5.140" / 130.56 | 0.345" / 8.76 |



PERFORMANCE DATA

| Characteristic | Test Method | Specification |
|--|--|---|
| Humidity | MIL-STD-202, Method 103B, Condition B | ±0.25% |
| Dielectric Withstanding Voltage | MIL-STD-202, Method 301, 750V | ±0.25% |
| Insulation Resistance | MIL-STD-202, Method 302, Condition A or B | >10,000 M or greater dry |
| Thermal Shock | MIL-STD-202, Method 107G, Condition B, B-1, or F | ±0.20% |
| Load Life | MIL-STD-202, Method 108A, Condition D | ±1.0% |
| Resistance to Solvents | MIL-STD-202, Method 215G | Acceptable for High Reliability Series only |
| Terminal Strength | MIL-STD-202, Method 211A, Condition A or B | ±0.25% |
| Shock (Specified Pulse) | MIL-STD-202, Method 213B, Condition I | ±0.25% |
| Vibration High Frequency | MIL-STD-202, Method 204D, Condition D | ±0.20% |
| Power Conditioning | MIL-R-49462A, Par 4.8 | ±0.50% |
| Solderability | MIL-STD-202, Method 208F | >95% Coverage |

TEMP. AND VOLTAGE COEFFICIENTS OF RESISTANCE

| Resistor Series | Temp. Coeff. of Resistance* | | | Voltage Coeff. of Resistance** | |
|-----------------|-----------------------------|-------------|-----------------|--------------------------------|-----------------|
| | 25 PPM/°C | 50 PPM/°C | 100 PPM/°C | < 2PPM/Volt | < 5PPM/Volt |
| MOX-1 | 1K-99M | 100M-450M | 451M-30,000M | 250Ω-1,000M | 1,001M-100,000M |
| MOX-2 | 1K-199M | 200M-1,000M | 1,001M-60,000M | 500Ω-2,600M | 2,601M-200,000M |
| MOX-3 | 1K-299M | 300M-1,500M | 1,501M-90,000M | 750Ω-4,000M | 4,001M-300,000M |
| MOX-4 | 1K-399M | 400M-2,000M | 2,001M-120,000M | 1K-5,300M | 5,301M-400,000M |
| MOX-5 | 1K-499M | 500M-2,500M | 2,501M-150,000M | 1.25K-6,700M | 6,701M-500,000M |

*TCR of 25ppm for temperature range of 0°C-85°C. TCR of 50ppm and 100ppm for -55°C to 125°C. Consult factory for TCR values operating higher than 125°C

**For tighter VCs please contact Ohmite.

ORDERING INFORMATION

| | | | | | |
|------------------------|-------------------|---------------------|--|---|-----------|
| | | Coating | | | |
| | | 2 = Black silicone | | | |
| | | 3 = Epoxy | | | |
| | | 6 = No coating | | RoHS Compliant | |
| Non-inductive optional | | | | | |
| MOX | -1 | N | -13 | 1006 | FE |
| Maxi Mox Series | Style 1,2,3,4,5,8 | Terminal 1 = 0.032" | Ohms First 3 digits are significant; 4th digit is multiplier (# of zeroes to follow). Examples: 1000 = 100Ω, 1503 = 150,000Ω, 5005 = 50,000,000Ω | Tolerance D = 0.5%, F = 1%, G = 2%, J = 5%, K = 10%, M = 15%, P = 20% | |

Not all tolerances available in all values.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.