

# **Wireless Module 802.11bgn with Antenna & Connector WYSAGVDX7 & WBSAGVDX7 Overview**

---

March 10, 2015 Version 1.0

# WYSAGVDX7 Wireless Module 802.11bgn with Antenna & Connector

## Features

- IEEE802.11b/g/n standard conformity,
- Low standby current (with advanced power save and sleep mode)
- Transmit speed : 11/5.5/2/1 Mbps(11b), 54/48/36/24/18/12/9/6 Mbps(11g), 72.2~6.5 Mbps (11n)
- Channel Number : 1 to 13 channel (11bg)
- Interface : SDIO
- Built-in : Crystal, BPF
- Security : WEP (64/128), TKIP, AES, WPA/WPA2, WAPI
- Small Outline : 20.0 x 11.0 x 2.15(Max) mm, Metal case package
- RoHS Conformity
- Certifications: JAPAN, FCC(USA), IC(CANADA)


## Application

- Camera, Portable printer, Handy terminal


## General Electrical Specification

| Parameter                                                                   | Description                        | Min.     | Typ.        | Max.        | Units |
|-----------------------------------------------------------------------------|------------------------------------|----------|-------------|-------------|-------|
| Carrier Frequency                                                           | IEEE802.11b/g/n                    | 2412     |             | 2472        | MHz   |
| Operation Voltage                                                           | VCC3.3                             | 3.0      | 3.3         | 3.6         | V     |
|                                                                             | VCC1.8                             | 1.71     | 1.8         | 1.89        | V     |
|                                                                             | VIO                                | 1.71/3.0 | 1.8/3.3     | 1.89/3.6    |       |
| TX Output Power (11b/g/n)                                                   | 11b/11g/11n                        |          | 6/6/6       | 8/8/8       | dBm   |
| RX Sensitivity (11b/g/n)                                                    | 11b/11g/11n                        |          | -86/-72/-69 | -76/-65/-64 | dBm   |
| TX Power Consumption                                                        | Burst(Duty43.4%)<br>Tx(11Mbps) 11b |          | 397         |             | mW    |
| RX Power Consumption                                                        | Continuous<br>RX(72Mbps)           |          | 188         |             | mW    |
| Power Consumption                                                           | Sleep Mode                         |          | 1.0         |             | mW    |
| General Operation Temperature Range<br>(Shielding case surface temperature) |                                    | 0        | 25          | 70          | deg-C |

## Block Diagram

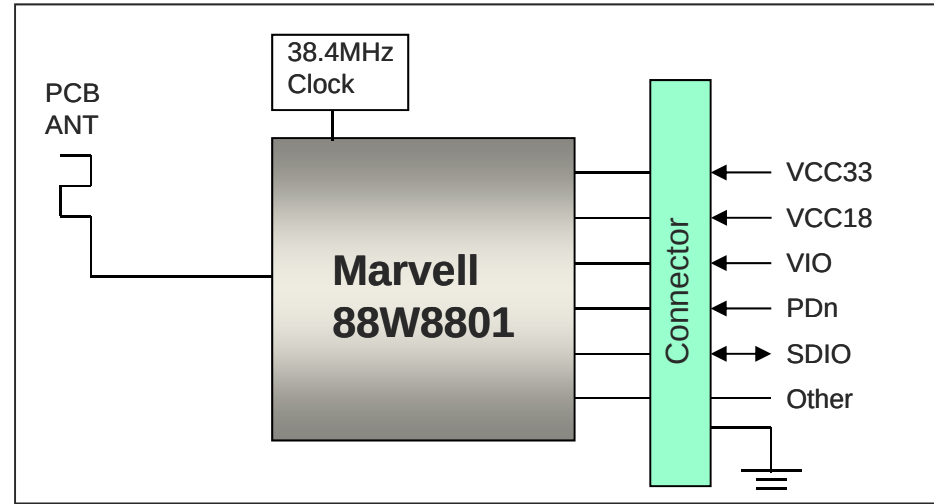

## Outline

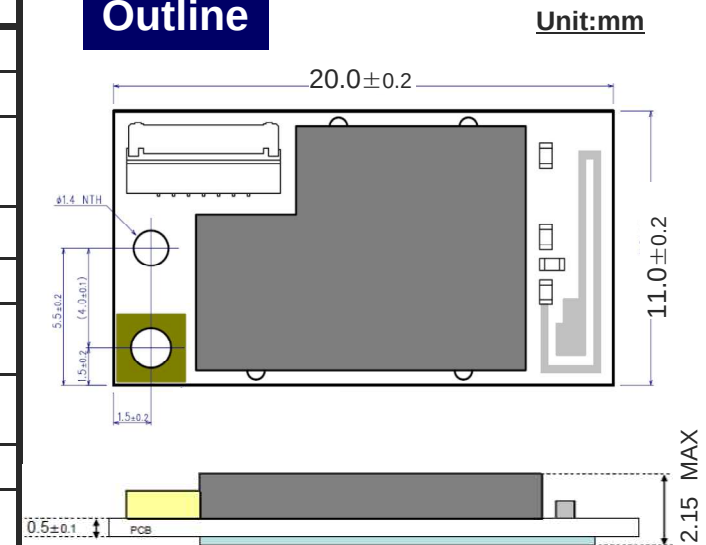


# WBSAGVDX7: Wireless LAN Module Evaluation Kit

To Evaluate WLAN Module WYSAGVDX7  
You Will Need WBSAGVDX7

**WBSAGVDX7** is the evaluation kit for WLAN Module **WYSAGVDX7**. This kit has everything you need to evaluate the performance of this module.

1 WBSAGVDX7

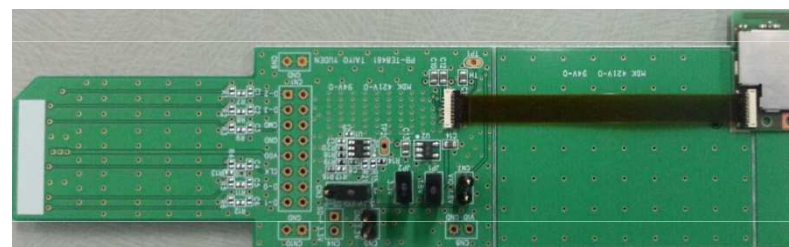

## WBSAGVDX7 Kit includes:

| No. | Item             | Description                                                    | Qty |
|-----|------------------|----------------------------------------------------------------|-----|
| 1   | WBSAGVDX7        | Evaluation Board for WLAN module WYSAGVDX7 with SDIO interface | 1   |
| 2   | Red & Blue Cable | Power Supply Cable                                             | 1   |
| 3   | FPC Cable        | SDIO communication Cable                                       | 1   |

2 Red & Blue Cable



3 FPC Cable



# Supplemental Product Information

---

## WLAN Module Operating Environment


- PC with Linux Fedora18 with software development option and SDIO interface  
**Attention: PC with SDIO is required. Although SDIO and SD Memory Card have the same slot shape, they are not compatible. WLAN Module and Evaluation Board will not work if they are connected to SD memory card slot.**
- PC with Windows7 is also required in case LABTOOL is used. Linux PC and Windows PC are connected via Ethernet cable.

## What will be provided if the Evaluation Board is purchased


- Data Report: Detail Module information
- Application Note: Peripheral design guide
- Evaluation Board Manual: Manual on how to evaluate the Module with the Evaluation Board
- Labtool User Guide: RF Control Tool Guide
- Labtool: RF Control Tool
- WLAN Device Driver Software
  - ◆ for Linux PC, Fedora18

**Attention: There is a possibility that export control could limit customer's access WLAN Device Driver and the API Specification depending on the customer's country or application.**

# Example of hardware configuration for WBSAGVDX7

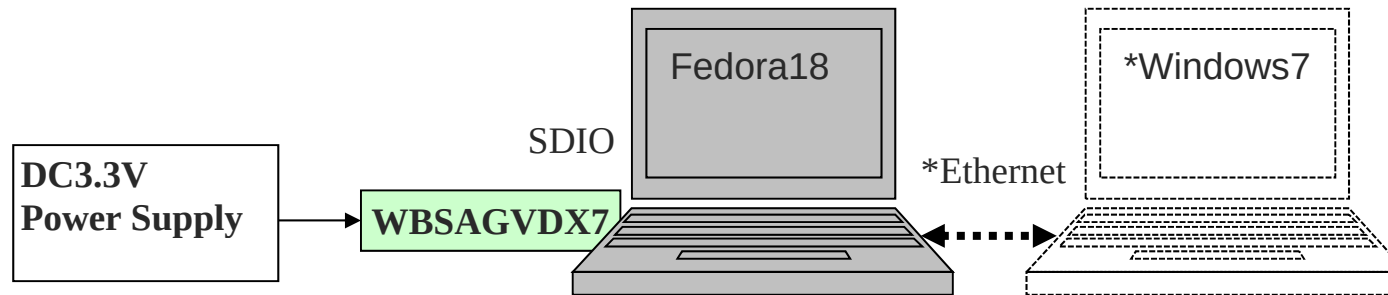

\*To use LABTOOL, PC with Windows7 is also required.  
Each PCs are connected via Ethernet cable.

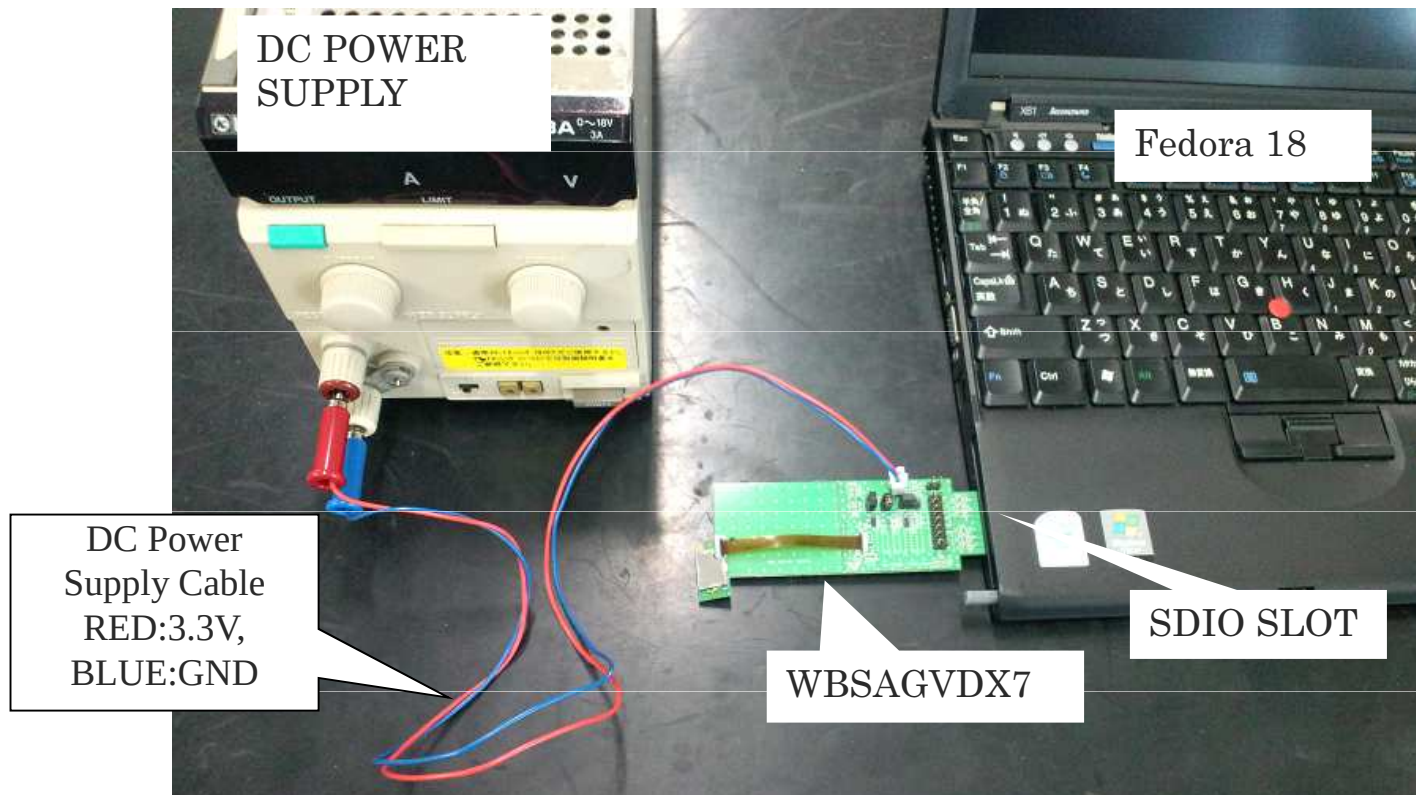

# Software structure

## Sample Application


- uaputl , mlanutl (Configuration tools)

## WLAN Device driver

- Data path  
Communicate data such as TCP or UDP.
- 11bg config/11n config  
Configure the such as Ch/Rate/band/mode.
- Infra, Adhoc config  
Configure the Infa or Adhoc mode.
- uAP, WFD config  
Configure the uAP or WFD mode.
- Supplicant  
Process WPA/WPA2 sequence.

## Firmware

- Data Tx/Rx  
Transmit and receive data on the air, such as TCP or UDP.
- 11b/g/n function  
Execute the function of such as Ch/Rate/Band/Mode.
- Infra, Adhoc function  
Execute the function of Infra or Adhoc mode.
- uAP, WFD function  
Execute the function of uAP or WFD mode.

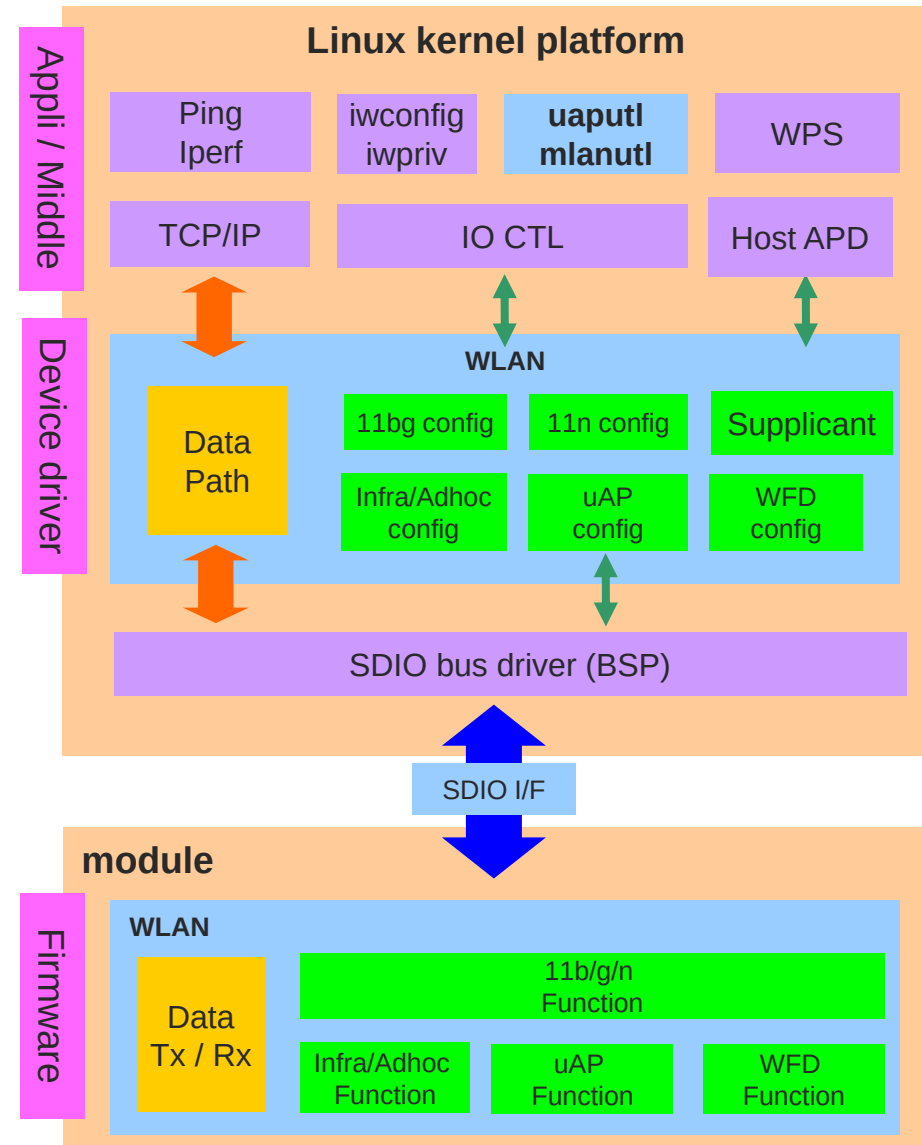

\*WFD : Wi-Fi Direct

# Software feature set

## **General**

- 802.11b Data rates of 1,2 ,5.5 and 11 Mbps.
- 802.11g Data rates 6 - 48, and 54 Mbps.
- 802.11n Data rates up to 72 Mbps (MCS0 - 7).
- 802.11d  
Regulatory Domain/Operating Class/Country Info
- 802.11e  
Qos EDCA / WMM (Wireless Multi-Media)  
U-APSD/ WMM-Power save
- 802.11i  
Open and Shared Authentication, WEP(64 128-bit)  
TKIP and AES-CCMP for WPA -PSK, WPA2-PSK  
Opensource WPA supplicant support.  
Embedded supplicant in the device driver
- Infrastructure and ad-hoc mode.
- IEEE Power Save, Auto Deep Sleep, Host Sleep
- Tx and Rx of AMPDU and AMSDU-4k Packets  
Only Tx of AMSDU-8k Packets.
- Background Scan, Vendor specific IE

## **Access point**

- Multi-BSS Support (2 BSS).
- Opensource Host based Authenticator Support (Hostapd)
- Association support up to 8 Stations.
- ACS (Automatic Channel Selection).

## **Simultaneous AP-STA Operation**

- AP-STA functionality.
- Independent security configurations on different interfaces.
- Enhanced Power Save.  
(AP-STA simultaneous power save)

## **Wi-Fi Direct/P2P**

- Autonomous Group Owner (GO) Mode.
- P2P Client mode.
- Power save  
P2P Client with IEEE Power save enabled  
P2P Client with WMM PS enabled  
P2P Client with NoA PS enabled on GO  
P2P Client with Opportunistic PS enabled on GO
- Max 7 Clients Support
- Provision Discovery, Persistent Group,  
P2P Invitation

## Driver package

| Driver package (Platform) | Software                            | CPU / OS Type                                                                                                 | Content                                                           |
|---------------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
| Object package for PC     | Device driver                       | CPU : x86 (PC)<br>OS : Fedora 18 (Linux 3.6.10)                                                               | Driver object<br>- Configuration tools<br>- WLAN driver, Firmware |
|                           |                                     |                                                                                                               | Document<br>- Install guide<br>- Demo guide                       |
|                           | RF control tool (LABtool, Firmware) | LABtool<br>CPU : x86 (PC)<br>OS : Windows7<br><br>Firmware<br>CPU : x86 (PC)<br>OS : Fedora 18 (Linux 3.6.10) | Driver Object<br>- Labtool, Firmware                              |
|                           |                                     |                                                                                                               | Document<br>- User guide                                          |



**TAIYO YUDEN**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.