


# Type CC Low Resistance Precision Chip Resistors


- **Style FC** - Flip Chip version for surface mount applications.
- **Style WB** - Wire Bond version for hybrid applications with metallized back surface for solder down heat sinking of the chip, includes bondable termination pads to receive aluminum wire bonds.
- Thermal resistance is provided to optimize high power designs when utilizing higher thermal conductivity circuit board substrates such as IMS or Alumina.
- Resistance range down to 0.010 ohm at  $\pm 5\%$ , 0.050 ohm at  $\pm 2\%$ , and 0.10 ohm at  $\pm 1\%$ .
- Low inductance provides excellent high frequency and pulse response.
- High pulse handling and overload capability.
- Best choice for switching power supplies, motor speed controls, and high current sensing applications.

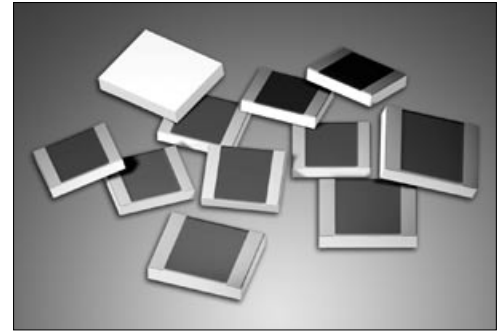

**Style FC - Flip Chip Version** is a surface mount version with solderable pads for flip chip soldering.

| Model    | Resistance     |                | Power Capability Information                                    |  |                          | Dimensions in inches and (millimeters) |                                     |                                     |                          | Comments           |
|----------|----------------|----------------|---|--|--------------------------|--|-------------------------------------|-------------------------------------|--------------------------|--------------------|
|          |                |                | General Applications<br>Power Rating<br>at 70°C<br>(see note 1) | High Power Applications<br>Thermal Resistance - $R_{thJC}$<br>Film (J) to Solder Pad (C)<br>(see note 2) | Max. Chip<br>Temperature | A                                      | B                                   | C                                   | D                        |                    |
|          | Min.           | Max.           |   |  |                          |  |                                     |                                     |                          |                    |
| CC1512FC | 0.010 $\Omega$ | 0.015 $\Omega$ | 0.75 Watt   | 22.7°C/Watt  | 150°C                    | .150 $\pm$ .007<br>(3.81 $\pm$ .18)    | .120 $\pm$ .007<br>(3.05 $\pm$ .18) | .027 $\pm$ .005<br>(.69 $\pm$ .13)  | .035 min.<br>(.89 min.)  | Solder Coated Pads |
|          | 0.020 $\Omega$ | 10.0 $\Omega$  | 0.75 Watt   | 22.7°C/Watt  | 150°C                    | .150 $\pm$ .007<br>(3.81 $\pm$ .18)    | .120 $\pm$ .007<br>(3.05 $\pm$ .18) | .022 $\pm$ .003<br>(.56 $\pm$ .08)  | .035 min.<br>(.89 min.)  | Solderable Pads    |
| CC2015FC | 0.020 $\Omega$ | 10.0 $\Omega$  | 1.0 Watt  | 16.0°C/Watt  | 150°C                    | .200 $\pm$ .007<br>(5.08 $\pm$ .18)    | .150 $\pm$ .007<br>(3.81 $\pm$ .18) | .027 $\pm$ .003<br>(.69 $\pm$ .08)  | .050 min.<br>(1.27 min.) | Solderable Pads    |
| CC2520FC | 0.010 $\Omega$ | 0.020 $\Omega$ | 1.5 Watts   | 13.0°C/Watt  | 150°C                    | .250 $\pm$ .007<br>(6.35 $\pm$ .18)    | .200 $\pm$ .007<br>(5.08 $\pm$ .18) | .032 $\pm$ .005<br>(.81 $\pm$ .13)  | .065 min.<br>(1.66 min.) | Solder Coated Pads |
|          | 0.025 $\Omega$ | 10.0 $\Omega$  | 1.5 Watts   | 11.5°C/Watt  | 150°C                    | .250 $\pm$ .007<br>(6.35 $\pm$ .18)    | .200 $\pm$ .007<br>(5.08 $\pm$ .18) | .041 $\pm$ .004<br>(1.04 $\pm$ .10) | .040 min.<br>(1.02 min.) | Solderable Pads    |

## Style FC Derating Curve For General Applications




**Note 1: General Applications** - The power rating for general applications is based upon 0.5 sq. in. (300 mm<sup>2</sup>) of termination pad or trace area (2 oz. copper) connected to each end of the resistor. Maximum chip temperature is 150°C. Use Derating Curve to derate appropriately for the maximum ambient temperature and for the temperature limitations of the adjacent materials.

**Note 2: Thermal Resistance** - In High Power Applications where the circuit board material provides high heat sinking benefits (such as IMS, Alumina, or other) the thermal resistance of the chip resistor is useful to establish the maximum power capability of the chip resistor in the application. The film temperature is measured at the center of the resistor element and the solder pad temperature is measured at the center of the termination pad (point X in the recommended circuit layouts shown below). Maximum temperature of the chip resistor (at the center of chip) should not exceed 150°C through the temperature range of the application.


## Recommended Circuit Board Layout (current and sense connections):

**Fig. 1A:** Kelvin layout recommended for values below 0.20 $\Omega$

C = Current connection  
S = Sense connection



**Fig. 1B:** Kelvin layout recommended for higher resistance values.



Custom resistance values and non-standard tolerances can be manufactured for high quantity applications. Please contact Caddock Applications Engineering.

### CC1512FC Standard Resistance Values:

Tolerance CC1512FC  $\pm 1\%$  Standard (except as noted).

|                   |                   |               |               |               |
|-------------------|-------------------|---------------|---------------|---------------|
| 0.010 $\Omega$ 5% | 0.033 $\Omega$ 5% | 0.20 $\Omega$ | 0.75 $\Omega$ | 3.30 $\Omega$ |
| 0.015 $\Omega$ 5% | 0.040 $\Omega$ 5% | 0.25 $\Omega$ | 1.00 $\Omega$ | 4.00 $\Omega$ |
| 0.020 $\Omega$ 5% | 0.050 $\Omega$ 2% | 0.30 $\Omega$ | 1.50 $\Omega$ | 5.00 $\Omega$ |
| 0.025 $\Omega$ 5% | 0.075 $\Omega$ 2% | 0.33 $\Omega$ | 2.00 $\Omega$ | 7.50 $\Omega$ |
| 0.030 $\Omega$ 5% | 0.10 $\Omega$     | 0.40 $\Omega$ | 2.50 $\Omega$ | 8.00 $\Omega$ |
|                   | 0.15 $\Omega$     | 0.50 $\Omega$ | 3.00 $\Omega$ | 10.0 $\Omega$ |

### CC2015FC Standard Resistance Values:

Tolerance CC2015FC  $\pm 1\%$  Standard (except as noted).

|                   |                   |               |               |               |
|-------------------|-------------------|---------------|---------------|---------------|
| 0.020 $\Omega$ 5% | 0.033 $\Omega$ 5% | 0.20 $\Omega$ | 0.75 $\Omega$ | 3.30 $\Omega$ |
| 0.025 $\Omega$ 5% | 0.040 $\Omega$ 5% | 0.25 $\Omega$ | 1.00 $\Omega$ | 4.00 $\Omega$ |
| 0.030 $\Omega$ 5% | 0.050 $\Omega$ 2% | 0.30 $\Omega$ | 1.50 $\Omega$ | 5.00 $\Omega$ |
|                   | 0.075 $\Omega$ 2% | 0.33 $\Omega$ | 2.00 $\Omega$ | 7.50 $\Omega$ |
|                   | 0.10 $\Omega$     | 0.40 $\Omega$ | 2.50 $\Omega$ | 8.00 $\Omega$ |
|                   | 0.15 $\Omega$     | 0.50 $\Omega$ | 3.00 $\Omega$ | 10.0 $\Omega$ |

### CC2520FC Standard Resistance Values:

Tolerance CC2520FC  $\pm 1\%$  Standard (except as noted).

|                   |                   |               |               |               |
|-------------------|-------------------|---------------|---------------|---------------|
| 0.010 $\Omega$ 5% | 0.033 $\Omega$ 5% | 0.20 $\Omega$ | 0.75 $\Omega$ | 3.30 $\Omega$ |
| 0.015 $\Omega$ 5% | 0.040 $\Omega$ 5% | 0.25 $\Omega$ | 1.00 $\Omega$ | 4.00 $\Omega$ |
| 0.020 $\Omega$ 5% | 0.050 $\Omega$ 2% | 0.30 $\Omega$ | 1.50 $\Omega$ | 5.00 $\Omega$ |
| 0.025 $\Omega$ 5% | 0.075 $\Omega$ 2% | 0.33 $\Omega$ | 2.00 $\Omega$ | 7.50 $\Omega$ |
| 0.030 $\Omega$ 5% | 0.10 $\Omega$     | 0.40 $\Omega$ | 2.50 $\Omega$ | 8.00 $\Omega$ |
|                   | 0.15 $\Omega$     | 0.50 $\Omega$ | 3.00 $\Omega$ | 10.0 $\Omega$ |

Note: Actual width of current trace is based on magnitude of current. Point of connection should be in the area shown.

**Applications Engineering**  
17271 North Umpqua Hwy.  
Roseburg, Oregon 97470-9422  
Phone: (541) 496-0700  
Fax: (541) 496-0408

**CADDOCK ELECTRONICS, INC.**

e-mail: [caddock@caddock.com](mailto:caddock@caddock.com) • web: [www.caddock.com](http://www.caddock.com)  
For Caddock Distributors listed by country see [caddock.com/contact/dist.html](http://caddock.com/contact/dist.html)

**Sales and Corporate Office**  
1717 Chicago Avenue  
Riverside, California 92507-2364  
Phone: (951) 788-1700  
Fax: (951) 369-1151


# Type CC Low Resistance Precision Chip Resistors

**Style WB - Wire Bond Version** is a hybrid mountable version with metallized pads for wire bonding utilizing **aluminum wire** and a metallized back surface for solder attachment of the back surface to a heat sinking substrate.

| Model    | Resistance     |               | Power Capability Information                                  |                       | Dimensions in inches and (millimeters) |                             |                            |                          | Comments                             |
|----------|----------------|---------------|---|-----------------------|--|-----------------------------|----------------------------|--------------------------|--------------------------------------|
|          |                |               | Thermal Resistance  | Max. Chip Temperature |  |                             |                            |                          |                                      |
|          | Min.           | Max.          | $R_{\theta JC}$<br>Film (J) to Solder Pad (C)<br>(see note 3) |                       | A                                      | B                           | C                          | D                        |                                      |
| CC2015WB | 0.020 $\Omega$ | 10.0 $\Omega$ | 13.9°C/Watt   | 150°C                 | .200 ± .007<br>(5.08 ± .18)            | .150 ± .007<br>(3.81 ± .18) | .027 ± .003<br>(.69 ± .08) | .050 min.<br>(1.27 min.) | Aluminum wire to be used for bonding |
| CC2520WB | 0.025 $\Omega$ | 10.0 $\Omega$ | 8.33°C/Watt   | 150°C                 | .250 ± .007<br>(6.35 ± .18)            | .200 ± .007<br>(5.08 ± .18) | .027 ± .003<br>(.69 ± .08) | .040 min.<br>(1.02 min.) | Aluminum wire to be used for bonding |

**Note 3: Thermal Resistance** - In High Power Applications where the circuit board material provides high heat sinking benefits (such as IMS, Alumina, or other) the thermal resistance of the chip resistor is useful to establish the maximum power capability of the chip resistor in the application. The film temperature is measured at the center of the resistor element and the solder pad temperature is measured at the soldered interface with the circuit board. Maximum temperature of the chip resistor (at the center of chip) should not exceed 150°C through the temperature range of the application.

### Location for Sense (Potential) Connection:

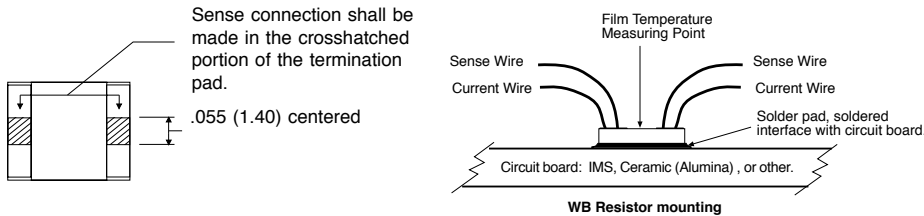

### CC2015WB Standard Resistance Values:

Tolerance CC2015WB ±1% Standard (except as noted).

|                   |                   |               |               |               |
|-------------------|-------------------|---------------|---------------|---------------|
| 0.020 $\Omega$ 5% | 0.050 $\Omega$ 2% | 0.25 $\Omega$ | 0.75 $\Omega$ | 3.30 $\Omega$ |
| 0.025 $\Omega$ 5% | 0.075 $\Omega$ 2% | 0.30 $\Omega$ | 1.00 $\Omega$ | 4.00 $\Omega$ |
| 0.030 $\Omega$ 5% | 0.10 $\Omega$     | 0.33 $\Omega$ | 1.50 $\Omega$ | 5.00 $\Omega$ |
| 0.033 $\Omega$ 5% | 0.15 $\Omega$     | 0.40 $\Omega$ | 2.00 $\Omega$ | 7.50 $\Omega$ |
| 0.040 $\Omega$ 5% | 0.20 $\Omega$     | 0.50 $\Omega$ | 2.50 $\Omega$ | 8.00 $\Omega$ |
|                   |                   |               | 3.00 $\Omega$ | 10.0 $\Omega$ |

### CC2520WB Standard Resistance Values:

Tolerance CC2520WB ±1% Standard (except as noted).

|                   |                   |               |               |               |
|-------------------|-------------------|---------------|---------------|---------------|
| 0.025 $\Omega$ 5% | 0.050 $\Omega$ 2% | 0.25 $\Omega$ | 0.75 $\Omega$ | 3.30 $\Omega$ |
| 0.030 $\Omega$ 5% | 0.075 $\Omega$ 2% | 0.30 $\Omega$ | 1.00 $\Omega$ | 4.00 $\Omega$ |
| 0.033 $\Omega$ 5% | 0.10 $\Omega$     | 0.33 $\Omega$ | 1.50 $\Omega$ | 5.00 $\Omega$ |
| 0.040 $\Omega$ 5% | 0.15 $\Omega$     | 0.40 $\Omega$ | 2.00 $\Omega$ | 7.50 $\Omega$ |
|                   | 0.20 $\Omega$     | 0.50 $\Omega$ | 2.50 $\Omega$ | 8.00 $\Omega$ |
|                   |                   |               | 3.00 $\Omega$ | 10.0 $\Omega$ |

Custom resistance values and non-standard tolerances can be manufactured for high quantity applications. Please contact Caddock Applications Engineering.

## General Information for Type CC - Style FC and Style WB - Chip Resistors

### Specifications:

**Temperature Coefficient:** TC referenced to +25°C,  $\Delta R$  taken at +150°C.

0.50 ohm and above, -20 to +80 ppm/°C  
0.050 ohm to 0.49 ohm, 0 to +200 ppm/°C  
below 0.050 ohm, 0 to +300 ppm/°C.

**Inductance:** Less than 5 nH typical.

**Load Life:** 1000 hours at rated power, based upon 150°C max. chip temperature,  $\Delta R \pm (0.5\% + 0.0005 \text{ ohm})$ .

**Momentary Overload:** 1.5 times rated power, for 5 seconds,  $\Delta R \pm (0.5\% + 0.0005 \text{ ohm})$ .

**Operating Temperature:** -55°C to +150°C.

**Measurement Note:** All measurements are taken using Kelvin connections per the recommended connection locations.

### Solder attachment note:

**Style FC** has a bare ceramic back surface. The recommended solders for flip chip solder attachment are 62Sn / 36Pb / 2Ag, 96.5Sn / 3.5Ag, or standard Sn / Ag / Cu solder alloys.


**Style WB** has a metallized back surface for soldering to a substrate or a heat sink. The recommended solders to be used are 62Sn / 36Pb / 2Ag, 96.5Sn / 3.5Ag, or standard Sn / Ag / Cu solder alloys.

### Packaging information:



**Style FC**, flip chip resistors, are shipped with the bare ceramic side up in the pocket, with the solderable pads facing down.

**Style WB**, wire bondable resistors, are shipped with the wire bondable pads facing up in the pocket.

The illustration shows the orientation of the CC1512 and CC2015 chip resistors in the tape. The CC2520 chip resistors are rotated 90° from what is shown in the illustration.

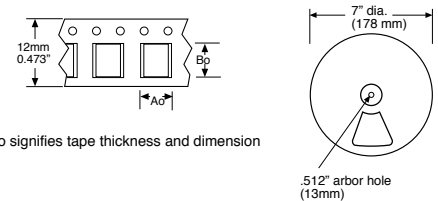

### Ordering Information:

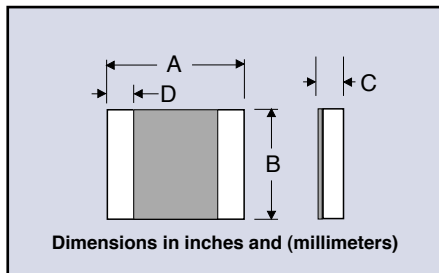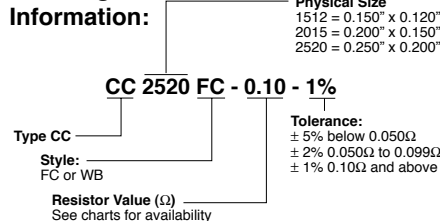

|    | Size 1512       | Size 2015       | Size 2520       |
|----|-----------------|-----------------|-----------------|
| Ao | 0.135" (3.43mm) | 0.189" (4.80mm) | 0.271" (6.88mm) |
| Bo | 0.167" (4.24mm) | 0.209" (5.31mm) | 0.216" (5.49mm) |
| Ko | 0.037" (0.94mm) | 0.087" (2.21mm) | 0.066" (1.68mm) |

Carrier Tape and pocket dimensions:  
Tape is 12mm Carrier Tape (8mm pitch)

### Full reel quantities:

1500 pieces per reel for CC1512  
1000 pieces per reel for CC2015 and CC2520

Quantities of less than 250 will be shipped in tape without reel and without tape leader at the option of Caddock.

Tape dimensions and materials will be consistent with EIA-481-1. Reels will be marked with a label containing Caddock logo, part number, resistor value, tolerance, packaging date, and quantity.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.