



# ETA-USA

## HIGH QUALITY SWITCHING POWER SUPPLIES


DC/DC SWITCHING POWER SUPPLY  
DC INPUT 12,24,48, 110  
DUAL OUTPUT  
45WATTS

### VTB-WCx/VTB-WD SERIES



Dimension: 96W × 160L × 33H

#### General Description

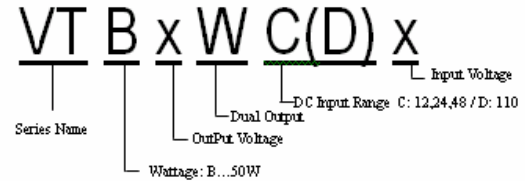

#### Features

1. Variety of Models
2. Chassis mount type
3. Compact and High Efficiency

#### DC INPUT: 12V

| Input Characteristics   | Unit | VTB21FWC<br>12 | VTB21FWC<br>12B | VTB22FWC<br>12 | VTB22FWC<br>12B | VTB23FWC<br>12 | VTB24FWC<br>12 | VTB24FWC<br>12B |
|-------------------------|------|----------------|-----------------|----------------|-----------------|----------------|----------------|-----------------|
| Input Voltage           | Vdc  | DC 12V         |                 |                |                 |                |                |                 |
| Input Voltage Range     | Vdc  | DC 9.2V-16V    |                 |                |                 |                |                |                 |
| Inrush Current          | A    | Not Specified  |                 |                |                 |                |                |                 |
| Efficiency (typical) *1 | %    | 78             | 84              | 82             | 81              | 83             | 73             | 81              |
| MTBF                    | H    | 500'000        |                 |                |                 |                |                |                 |
| Switching Frequency     | kHz  | 40 Fix         | 40 Fix          | 40 Fix         | 40 Fix          | 40 Fix         | 40 Fix         | 40 Fix          |

#### DC INPUT: 24V

| Input Characteristics   | Unit | VTB21FWC<br>24 | VTB21FWC<br>24B | VTB22FWC<br>24 | VTB22FWC<br>24B | VTB23FWC<br>24 | VTB24FWC<br>24 | VTB24FWC<br>24B |
|-------------------------|------|----------------|-----------------|----------------|-----------------|----------------|----------------|-----------------|
| Input Voltage           | Vdc  | DC 24V         |                 |                |                 |                |                |                 |
| Input Voltage Range     | Vdc  | DC 19-32V      |                 |                |                 |                |                |                 |
| Inrush Current          | A    | Not Specified  |                 |                |                 |                |                |                 |
| Efficiency (typical) *1 | %    | 79             | 83              | 83             | 83              | 84             | 79             | 79              |
| MTBF                    | H    | 500'000        |                 |                |                 |                |                |                 |
| Switching Frequency     | kHz  | 40 Fix         | 40 Fix          | 40 Fix         | 40 Fix          | 40 Fix         | 40 Fix         | 40 Fix          |

#### DC INPUT: 48V

| Input Characteristics   | Unit | VTB21FWC<br>48 | VTB21FWC<br>48B | VTB22FWC<br>48 | VTB22FWC<br>48B | VTB23FWC<br>48 | VTB24FWC<br>48 | VTB24FWC<br>48B |
|-------------------------|------|----------------|-----------------|----------------|-----------------|----------------|----------------|-----------------|
| Input Voltage           | Vdc  | DC 48V         |                 |                |                 |                |                |                 |
| Input Voltage Range     | Vdc  | DC 38-63V      |                 |                |                 |                |                |                 |
| Inrush Current          | A    | Not Specified  |                 |                |                 |                |                |                 |
| Efficiency (typical) *1 | %    | 76             | 83              | 81             | 81              | 83             | 79             | 80              |
| MTBF                    | H    | 500'000        |                 |                |                 |                |                |                 |
| Switching Frequency     | kHz  | 40 Fix         | 40 Fix          | 40 Fix         | 40 Fix          | 40 Fix         | 40 Fix         | 40 Fix          |

#### DC INPUT: 110V

| Input Characteristics   | Unit | VTB21FWD      | VTB21FWD<br>B | VTB22FWD | VTB22FWD<br>B | VTB23FWD | VTB24FWD | VTB24FWD<br>B |
|-------------------------|------|---------------|---------------|----------|---------------|----------|----------|---------------|
| Input Voltage           | Vdc  | DC 110V       |               |          |               |          |          |               |
| Input Voltage Range     | Vdc  | DC 85-140V    |               |          |               |          |          |               |
| Inrush Current          | A    | 20A (maximum) |               |          |               |          |          |               |
| Efficiency (typical) *1 | %    | 76            | 83            | 81       | 81            | 83       | 79       | 80            |
| MTBF                    | H    | 500'000       |               |          |               |          |          |               |
| Switching Frequency     | kHz  | 40 Fix        | 40 Fix        | 40 Fix   | 40 Fix        | 40 Fix   | 40 Fix   | 40 Fix        |





# ETA-USA

## HIGH QUALITY SWITCHING POWER SUPPLIES

### VTB-WC / VTB-WD

| Output Characteristic                                 | Unit | Models   |      |                    |     |                 |     |                    |     |                 |     |                 |     |                    |     |
|---|------|--|------|--------------------|-----|-----------------|-----|--------------------|-----|-----------------|-----|-----------------|-----|--------------------|-----|
|   |      | VTB21FWCx / FWD  |      | VTM21FWCx B / FWDB |     | VTM22FWCx / FWD |     | VTM22FWCx B / FWDB |     | VTM23FWCx / FWD |     | VTM24FWCx / FWD |     | VTM24FWCx B / FWDB |     |
| Output Voltage  | V    | 5  | 24   | 24                 | 5   | 12              | 12  | 12                 | 12  | 15              | 15  | 5               | 12  | 12                 | 5   |
| Output Current<br>45W at horizontal mount<br>(Vin=12) | A    | 0.5  | 0.75 | 1.5                | 1.4 | 2.0             | 1.5 | 3.0                | 0.6 | 1.5             | 1.3 | 5.0             | 1.5 | 3.0                | 1.4 |
| 25W at horizontal mount<br>(Vin=24,48)                |      | 0.5  | 0.85 | 1.5                | 1.5 | 2.0             | 1.7 | 3.0                | 0.8 | 1.7             | 1.3 | 5.0             | 1.7 | 3.0                | 1.5 |
| 30W at vertical mount<br>without cover(Vin=24,48)     |      | -  | 1.0  | 1.8                | -   | -               | 2.0 | 3.3                | -   | -               | 1.7 | -               | 2.0 | 3.5                | -   |
| 45W at horizontal<br>mount(Vin=110)                   |      | 0.5  | 0.85 | 1.5                | 1.5 | 2.0             | 1.7 | 3.0                | 0.8 | 1.7             | 1.3 | 5.0             | 1.7 | 3.0                | 1.5 |
| 50W at vertical mount<br>without cover(Vin=110)       |      | 5.0  | 1.0  | 1.8                | 1.5 | 2.0             | 2.0 | 3.3                | 0.8 | 1.7             | 1.7 | 5.0             | 2.0 | 3.5                | 1.5 |
| Voltage Adjust Range                                  | V    | +/-5% of Rated Output Voltage(at no load within input range) |      |                    |     |                 |     |                    |     |                 |     |                 |     |                    |     |
| Ripple Noise(max)*2                                   | mVpp | 100  | 290  | 290                | 100 | 170             | 170 | 170                | 170 | 200             | 200 | 100             | 170 | 170                | 100 |
| Rise up time  | mS   | 200mS(maximum) at 25°C and rated input/output                |      |                    |     |                 |     |                    |     |                 |     |                 |     |                    |     |
| Hold up time  | mS   | Not specified  |      |                    |     |                 |     |                    |     |                 |     |                 |     |                    |     |
| <b>Regulation</b>                                     |      |  |      |                    |     |                 |     |                    |     |                 |     |                 |     |                    |     |
| a. Line Regulation (max)                              | mV   | 35   | 168  | 168                | 35  | 84              | 84  | 84                 | 84  | 105             | 105 | 35              | 84  | 84                 | 35  |
| b. Load Regulation (max)                              | mV   | 50   | 240  | 240                | 50  | 120             | 120 | 120                | 120 | 150             | 150 | 50              | 120 | 120                | 50  |
| c. Temperature<br>Coefficient *3                      | °C   | 0.03%/°C   |      |                    |     |                 |     |                    |     |                 |     |                 |     |                    |     |
| d. Drift(maximum) *4                                  | mV   | 40   | 135  | 135                | 40  | 75              | 75  | 75                 | 75  | 90              | 90  | 40              | 75  | 75                 | 40  |
| e. Dynamic Load<br>Regulation (typ.) *5               | mV   | 150  | 720  | 720                | 150 | 360             | 360 | 360                | 360 | 450             | 450 | 150             | 360 | 360                | 150 |
| f. Recovery Time *5                                   | mS   | 0.5mS(typical)   |      |                    |     |                 |     |                    |     |                 |     |                 |     |                    |     |

Conditions:

\*1 at rated input/output

\*2 measured by a bayonet probe at the output connector at a 0 to 100MHz bandwidth

\*3 at 0 to +50°C

\*4 for 7hour period after 1hour warm-up at 25°C and rated input/output

\*5 when output current changed between 25% and 75% of rated output current rapidly at rated input



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037  
Phone: 1-800-ETA-POWER, (408) 778-2793 Fax: (408) 779-2753

Visit us at: [www.eta-usa.com](http://www.eta-usa.com)  
email at: [sales@eta-usa.com](mailto:sales@eta-usa.com)




# ETA-USA



## HIGH QUALITY SWITCHING POWER SUPPLIES

| Environmental Specification |  |
|-----------------------------|--|
| Operating Temperature       | 0 to +50°C   |
| Operating Humidity          | 85%RH (non-condensing)   |
| Storage Temperature         | -20 to +85°C   |
| Storage Humidity            | -  |
| Withstanding Voltage        | Primary-Secondary AC1,500V for 1minute (Vin=110 2000)<br>Primary-Frame Ground AC1,500V for 1minute (Vin=110 2000)<br>Secondary-Frame Ground AC500V for 1minute |
| Isolation Resistance        | Primary-Secondary-Frame Ground 50MΩ (minimum) by DC500V insulation tester  |
| Vibration                   | 5-10Hz:10mm double amplitude, 10-55Hz:19.6m/s <sup>2</sup> , 20minutes' period for 60minutes each along X,Y,Z axes (non-operating)                             |
| Shock                       | 294m/s <sup>2</sup>  |
| Cooling                     | Convection   |
| Functions                   |  |
| Over current Protection     | Current Limiting with automatic recovery   |
| Over voltage Protection     | zener diode clamping   |
| Remote Sense                | not available  |
| Remote On/Off               | not available  |
| Reverse Voltage Protection  | by internal fuse (Vin=110 by internal bridge diode)  |
| Line Conduction Noise       | Not specified  |
| Weight [g] (typical)        | 480 G  |
| Dimension [mm]              | 96W × 160L × 25H   |

### EFFICIENCY CURVE

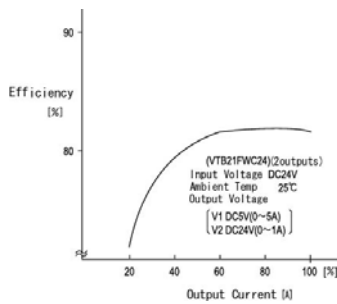

### OCP CURVE

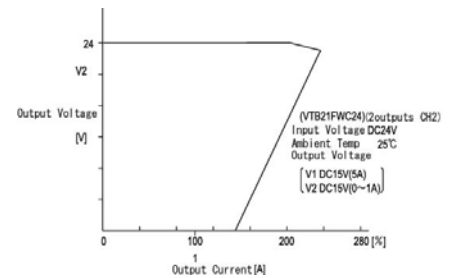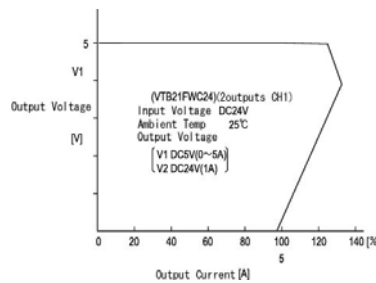



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.