

Alchip™-MVE Series

- Endurance : 1,000 to 2,000 hours at 105°C
- Case size range : $\phi 4 \times 5.2\text{L}$ to $\phi 18 \times 21.5\text{L}$
- Solvent resistant type except 100 to 450V_{dc} (see PRECAUTIONS AND GUIDELINES)
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.


◆SPECIFICATIONS

Items	Characteristics												
Category	-40 to +105℃												
Temperature Range													
Rated Voltage Range	6.3 to 450V _{dc}												
Capacitance Tolerance	± 20%(M) (at 20℃, 120Hz)												
Leakage Current	Rated voltage (V _{dc})	6.3 to 100V							160 to 450V				
	D55 to JA0	I=0.01CV or 3μA, whichever is greater (2 minutes)							—				
	KE0 to MN0	I=0.03CV or 4μA, whichever is greater (1 minute)							I=0.04CV+100μA (1minute)				
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20℃)												
Dissipation Factor (tan δ)	See STANDARD RATINGS (at 20℃, 120Hz)												
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	400 to 450V		
	D55 to JA0	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	2	3	—	—	
		Z(-40℃)/Z(+20℃)	12	8	6	4	3	3	3	4	—	—	
	KE0 to MN0	Z(-25℃)/Z(+20℃)	5	4	3	2	2	2	2	2	3	6	
		Z(-40℃)/Z(+20℃)	10	8	6	4	3	3	3	3	6	10	(at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage is applied for the specified period of time at 105℃.												
	Size code	D55 to F80					HA0 to MN0						
	Time	1,000 hours					2,000 hours						
	Capacitance change	≤ ± 30% of the initial value					≤ ± 20% of the initial value						
	D.F. (tan δ)	≤ 300% of the initial specified value					≤ 200% of the initial specified value						
	Leakage current	≤ The initial specified value					≤ The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours (500 hours for B55 to F80 size) at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.												
	Size code	D55 to F80					HA0 to MN0						
	Capacitance change	≤ ± 25% of the initial value					≤ ± 20% of the initial value						
	D.F. (tan δ)	≤ 200% of the initial specified value					≤ 200% of the initial specified value						
	Leakage current	≤ The initial specified value					≤ The initial specified value						

◆DIMENSIONS [mm]

- Terminal Code : A


- Size code : D55 to MN0

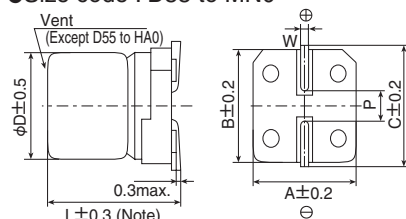

Note : L±0.5 for HA0 to MN0

- Terminal Code : G (Vibration resistant structure)

- Size code : LH0 to MN0

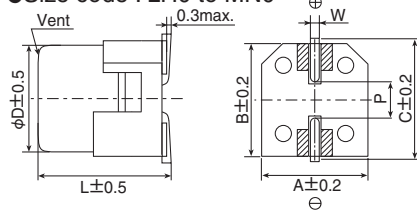

▨ : Dummy terminals

Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

◆MARKING


D55 to JA0
Ex) 16V22 μ F



KE0 to MN0
Ex) 25V1,000 μ F



◆PART NUMBERING SYSTEM

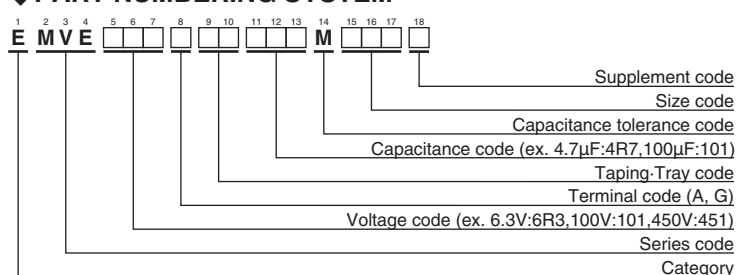

◆RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Size code	Capacitance(μ F)	Frequency(Hz)	120	1k	10k	100k
D55 to JA0	1.0		1.00	1.50	1.75	1.80
	2.2 to 10		1.00	1.30	1.40	1.50
	22 to 1,500		1.00	1.05	1.08	1.08
KE0 to MN0	3.3 to 4.7		1.00	1.75	2.30	2.50
	10 to 68		1.00	1.50	1.75	1.80
	100 to 1,000		1.00	1.30	1.40	1.50
	2,200 to 6,800		1.00	1.05	1.08	1.08

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.

Please refer to "Product code guide (surface mount type)"

◆STANDARD RATINGS

□ is not solvent resistant.

WV (V _{dc})	Cap (μF)	Size code	tan δ	Rated ripple current (mA _{rms} /105°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	tan δ	Rated ripple current (mA _{rms} /105°C, 120Hz)	Part No.
6.3	22	D55	0.30	22	EMVE6R3ARA220MD55G	35	330	JA0	0.16	450	EMVE350ARA331MJA0G
	33	E55	0.30	34	EMVE6R3ARA330ME55G		470	KE0	0.22	520	EMVE350ARA471MKE0S
	47	E55	0.30	38	EMVE6R3ARA470ME55G		470	LH0	0.22	650	EMVE350□RA471MLH0S
	100	F55	0.30	69	EMVE6R3ARA101MF55G		1,000	LH0	0.22	750	EMVE350□RA102MLH0S
	220	F80	0.45	120	EMVE6R3ARA221MF80G		1,000	MH0	0.22	1,000	EMVE350□RA102MMH0S
	330	HA0	0.40	290	EMVE6R3ARA331MHA0G		2,200	MN0	0.24	1,450	EMVE350□RA222MMN0S
	470	HA0	0.45	320	EMVE6R3ARA471MHA0G	50	1.0	D55	0.12	8.0	EMVE500ARA1R0MD55G
	680	HA0	0.45	340	EMVE6R3ARA681MHA0G		2.2	D55	0.12	12	EMVE500ARA2R2MD55G
	1,000	JA0	0.40	410	EMVE6R3ARA102MJA0G		3.3	D55	0.12	15	EMVE500ARA3R3MD55G
	1,500	JA0	0.45	550	EMVE6R3ARA152MJA0G		4.7	E55	0.12	20	EMVE500ARA4R7ME55G
	2,200	KE0	0.40	680	EMVE6R3ARA222MKE0S		10	F55	0.12	32	EMVE500ARA100MF55G
	2,200	LH0	0.40	840	EMVE6R3□RA222MLH0S		33	F80	0.14	65	EMVE500ARA330MF80G
	3,300	KG5	0.42	850	EMVE6R3ARA332MKG5S		47	F80	0.14	80	EMVE500ARA470MF80G
	3,300	MH0	0.42	1,000	EMVE6R3□RA332MMH0S		100	HA0	0.14	230	EMVE500ARA101MHA0G
	4,700	LN0	0.44	1,200	EMVE6R3□RA472MLN0S		220	JA0	0.14	375	EMVE500ARA221MJA0G
	4,700	MH0	0.44	1,200	EMVE6R3□RA472MMH0S		330	KE0	0.18	500	EMVE500ARA331MKE0S
	6,800	LN0	0.48	1,200	EMVE6R3□RA682MLN0S		330	LH0	0.18	600	EMVE500□RA331MLH0S
	6,800	MN0	0.48	1,350	EMVE6R3□RA682MMN0S		470	LH0	0.18	700	EMVE500□RA471MLH0S
							470	MH0	0.18	750	EMVE500□RA471MMH0S
							1,000	MN0	0.18	1,200	EMVE500□RA102MMN0S
10	22	E55	0.24	30	EMVE100ARA220ME55G	63	1.0	D55	0.12	8.0	EMVE630ARA1R0MD55G
	33	E55	0.24	34	EMVE100ARA330ME55G		2.2	D55	0.12	12	EMVE630ARA2R2MD55G
	47	F55	0.24	48	EMVE100ARA470MF55G		3.3	E55	0.12	17	EMVE630ARA3R3ME55G
	100	F55	0.30	69	EMVE100ARA101MF55G		4.7	F55	0.12	22	EMVE630ARA4R7MF55G
	150	F80	0.35	100	EMVE100ARA151MF80G		10	F55	0.12	32	EMVE630ARA100MF55G
	220	F80	0.35	120	EMVE100ARA221MF80G		22	F80	0.12	58	EMVE630ARA220MF80G
	330	HA0	0.35	290	EMVE100ARA331MHA0G		33	HA0	0.12	140	EMVE630ARA330MHA0G
	470	HA0	0.35	320	EMVE100ARA471MHA0G		47	HA0	0.12	170	EMVE630ARA470MHA0G
	1,000	JA0	0.35	410	EMVE100ARA102MJA0G		100	JA0	0.12	310	EMVE630ARA101MJA0G
	2,200	KG5	0.36	750	EMVE100ARA222MKG5S		220	KE0	0.14	470	EMVE630ARA221MKE0S
	2,200	LH0	0.36	850	EMVE100□RA222MLH0S		220	LH0	0.14	560	EMVE630□RA221MLH0S
	3,300	LH0	0.38	1,000	EMVE100□RA332MLH0S		330	LH0	0.14	700	EMVE630□RA331MLH0S
	3,300	MH0	0.38	1,100	EMVE100□RA332MMH0S		330	MH0	0.14	750	EMVE630□RA331MMH0S
	4,700	LN0	0.40	1,300	EMVE100□RA472MLN0S		470	LN0	0.14	900	EMVE630□RA471MLN0S
	4,700	MN0	0.40	1,350	EMVE100□RA472MMN0S		470	MH0	0.14	900	EMVE630□RA471MMH0S
16	10	D55	0.20	17	EMVE160ARA100MD55G	100	22	HA0	0.12	100	EMVE101ARA220MHA0G
	22	E55	0.20	30	EMVE160ARA220ME55G		33	JA0	0.12	150	EMVE101ARA330MJA0G
	33	F55	0.20	45	EMVE160ARA330MF55G		47	KE0	0.10	250	EMVE101ARA470MKE0S
	47	F55	0.20	48	EMVE160ARA470MF55G		68	KE0	0.10	300	EMVE101ARA680MKE0S
	100	F55	0.26	69	EMVE160ARA101MF55G		100	KE0	0.10	380	EMVE101ARA101MKE0S
	150	F80	0.28	100	EMVE160ARA151MF80G		100	LH0	0.10	450	EMVE101□RA101MLH0S
	220	F80	0.28	120	EMVE160ARA221MF80G		220	LN0	0.10	750	EMVE101□RA221MLN0S
	330	HA0	0.28	290	EMVE160ARA331MHA0G		220	MH0	0.10	750	EMVE101□RA221MMH0S
	470	HA0	0.28	320	EMVE160ARA471MHA0G		330	MN0	0.10	980	EMVE101□RA331MMN0S
	680	JA0	0.28	470	EMVE160ARA681MJA0G		33	KE0	0.15	95	EMVE161ARA330MKE0S
	1,000	KE0	0.30	550	EMVE160ARA102MKE0S		47	LH0	0.15	260	EMVE161□RA470MLH0S
	1,000	LH0	0.30	650	EMVE160□RA102MLH0S		68	LN0	0.15	320	EMVE161□RA680MLN0S
	2,200	LH0	0.32	950	EMVE160□RA222MLH0S		68	MH0	0.15	320	EMVE161□RA680MMH0S
	2,200	MH0	0.32	1,000	EMVE160□RA222MMH0S		100	LN0	0.15	380	EMVE161□RA101MLN0S
	3,300	LN0	0.34	1,200	EMVE160□RA332MLN0S	200	10	KE0	0.15	80	EMVE201ARA100MKE0S
	3,300	MH0	0.34	1,200	EMVE160□RA332MMH0S		22	KG5	0.15	110	EMVE201ARA220MKG5S
25	10	E55	0.16	27	EMVE250ARA100ME55G		33	LH0	0.15	220	EMVE201□RA330MLH0S
	22	F55	0.16	44	EMVE250ARA220MF55G		47	LN0	0.15	270	EMVE201□RA470MLN0S
	33	F55	0.16	50	EMVE250ARA330MF55G		47	MH0	0.15	270	EMVE201□RA470MMH0S
	47	F55	0.16	60	EMVE250ARA470MF55G		68	MN0	0.15	330	EMVE201□RA680MMN0S
	100	F80	0.18	100	EMVE250ARA101MF80G	250	4.7	KE0	0.15	65	EMVE251ARA47R7MKE0S
	150	HA0	0.18	240	EMVE250ARA151MHA0G		10	KG5	0.15	105	EMVE251ARA100MKG5S
	220	HA0	0.18	320	EMVE250ARA221MHA0G		22	LH0	0.15	180	EMVE251□RA220MLH0S
	330	JA0	0.16	450	EMVE250ARA331MJA0G		33	LN0	0.15	230	EMVE251□RA330MLN0S
	470	JA0	0.18	490	EMVE250ARA471MJA0G		33	MH0	0.15	230	EMVE251□RA330MMH0S
	1,000	LH0	0.26	820	EMVE250□RA102MLH0S		47	MN0	0.15	280	EMVE251□RA470MMN0S
	1,000	MH0	0.26	880	EMVE250□RA102MMH0S	400	4.7	KG5	0.20	50	EMVE401ARA47R7MKG5S
	2,200	LN0	0.28	1,250	EMVE250□RA222MLN0S		10	LH0	0.20	85	EMVE401□RA100MLH0S
	2,200	MN0	0.28	1,300	EMVE250□RA222MMN0S		22	MN0	0.20	130	EMVE401□RA220MMN0S
						450	3.3	KE0	0.20	40	EMVE451ARA3R3MKE0S
							4.7	KG5	0.20	50	EMVE451ARA47R7MKG5S
							10	LH0	0.20	85	EMVE451□RA100MLH0S
							22	MN0	0.20	130	EMVE451□RA220MMN0S
35	4.7	D55	0.14	16	EMVE350ARA4R7MD55G	450					
	10	E55	0.14	27	EMVE350ARA100ME55G						
	22	F55	0.14	44	EMVE350ARA220MF55G						
	47	F80	0.16	80	EMVE350ARA470MF80G						
	100	F80	0.16	100	EMVE350ARA101MF80G						
	150	HA0	0.16	260	EMVE350ARA151MHA0G						
	220	JA0	0.16	375	EMVE350ARA221MJA0G						

□ : Enter the appropriate terminal code.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

United Chemi-Con (UCC):

EMVE101ARA680MKE0S	EMVE101ADA330MJA0G	EMVE101ADA101MKE0S	EMVE201ARA220MKG5S
EMVE350ARA471MKE0S	EMVE500ADA470MF80G	EMVE630ARA221MKE0S	EMVE100ADA102MJA0G
EMVE101ADA220MHA0G	EMVE101ARA680KEOS	EMVE101ARA680MKD5G	EMVE160ADA220ME55G
EMVE250ADA221MHA0G	EMVE250ADA331MJA0G	EMVE250ADA471MJA0G	EMVE350ADA101MF80G
EMVE350ADA221MJA0G	EMVE350ADA470MF80G	EMVE500ADA100MF55G	EMVE500ADA1R0MD55G
EMVE630ADA100MF55G	EMVE630ADA101MJA0G	EMVE500ADA101MHA0G	EMVE160ADA471MHA0G
EMVE101GDA221MLN0S	EMVE630ADA4R7MF55G	EMVE630ADA470MHA0G	EMVE630ADA3R3ME55G
EMVE6R3GDA472MLN0S	EMVE630ADA330MHA0G	EMVE630ADA2R2MD55G	EMVE630ADA220MF80G
EMVE630ADA1R0MD55G	EMVE6R3ADA101MF55G	EMVE160ADA101MF55G	EMVE630GDA221MLH0S
EMVE101GDA331MMN0S	EMVE6R3GDA682MLN0S	EMVE6R3GDA682MMN0S	EMVE6R3GDA472MMH0S
EMVE101GDA101MLH0S	EMVE101GDA221MMH0S	EMVE101ARA470MKE0S	EMVE101ARA101MKE0S
EMVE100GDA472MMN0S	EMVE6R3ADA470ME55G	EMVE6R3ADA221MF80G	EMVE350ADA220MF55G
EMVE630GDA471MLN0S	EMVE6R3GDA332MMH0S	EMVE6R3GDA222MLH0S	EMVE6R3ARA332MKG5S
EMVE6R3ARA222MKE0S	EMVE630ADAR47MD55G	EMVE6R3ADA471MHA0G	EMVE6R3ADA331MHA0G
EMVE6R3ADA330ME55G	EMVE6R3ADA220MD55G	EMVE6R3ADA102MJA0G	EMVE6R3ADA152MJA0G
EMVE630GDA471MMH0S	EMVE630GDA331MMH0S	EMVE630GDA331MLH0S	EMVE6R3ADA681MHA0G
EMVE160ADA470MF55G	EMVE101ADA470MJA0G	EMVE250ADA330MF55G	EMVE250ADA220MF55G
EMVE250ADA151MHA0G	EMVE160ADA100MD55G	EMVE250ADA100ME55G	EMVE160ADA681MJA0G
EMVE160ADA221MF80G	EMVE250ADA470MF55G	EMVE160ADA331MHA0G	EMVE250ADA101MF80G
EMVE160ARA102MKE0S	EMVE160ARA152MKE0S	EMVE160GDA102MLH0S	EMVE160GDA222MLH0S
EMVE160GDA222MMH0S	EMVE160GDA332MLN0S	EMVE160GDA332MMH0S	EMVE160ADA330MF55G
EMVE100ADA221MF80G	EMVE350GDA102MLH0S	EMVE160ADA151MF80G	EMVE100GDA472MLN0S
EMVE100GDA332MMH0S	EMVE100GDA332MLH0S	EMVE100GDA222MLH0S	EMVE100ARA222MKG5S
EMVE100ADA471MHA0G	EMVE100ADA470MF55G	EMVE100ADA330ME55G	EMVE100ADA220ME55G
EMVE100ADA151MF80G	EMVE350ADA100ME55G	EMVE250GDA222MMN0S	EMVE250GDA222MLN0S



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.