

# 2SP0115T2Cx-17

## Preliminary Data Sheet

Compact, high-performance, plug-and-play dual-channel IGBT driver based on SCALE™-2 technology for individual and parallel-connected modules

### Abstract

The SCALE™-2 plug-and-play driver 2SP0115T2Cx-17 is a compact dual-channel intelligent gate driver designed for 1700V 17mm dual IGBT modules. The driver features an electrical interface with a built-in DC/DC power supply.

**The turn-on and turn-off gate resistors of both channels are not assembled in order to provide maximum flexibility. They must be assembled by the user before start of operation.** Please refer to the paragraph on "Gate Resistor Assembly" for the recommended gate resistors.

For drivers adapted to other types of high-power and high-voltage IGBT modules, refer to

[www.IGBT-Driver.com/go/plug-and-play](http://www.IGBT-Driver.com/go/plug-and-play)

### Features

- ✓ Plug-and-play solution
- ✓ Allows parallel connection of IGBT modules
- ✓ Shortens application development time
- ✓ Extremely reliable; long service life
- ✓ Built-in DC/DC power supply
- ✓ 20-pin flat cable interface
- ✓ Duty cycle 0... 100%
- ✓ Active clamping of  $V_{ce}$  at turn-off
- ✓ IGBT short-circuit protection
- ✓ Monitoring of supply voltage
- ✓ Safe isolation to EN 50178
- ✓ UL compliant
- ✓ Suitable for 1700V 17mm dual IGBT modules
- ✓ Gate resistors not assembled

### Applications

- ✓ Wind-power converters
- ✓ Industrial drives
- ✓ UPS
- ✓ Power-factor correctors
- ✓ Traction
- ✓ Railroad power supplies
- ✓ Welding
- ✓ SMPS
- ✓ Radiology and laser technology
- ✓ Research
- ✓ and many others

## Preliminary Data Sheet

### Safety Notice!

The data contained in this data sheet is intended exclusively for technically trained staff. Handling all high-voltage equipment involves risk to life. Strict compliance with the respective safety regulations is mandatory!

Any handling of electronic devices is subject to the general specifications for protecting electrostatic-sensitive devices according to international standard IEC 60747-1, Chapter IX or European standard EN 100015 (i.e. the workplace, tools, etc. must comply with these standards). Otherwise, this product may be damaged.

### Important Product Documentation

This data sheet contains only product-specific data. For a detailed description, must-read application notes and common data that apply to the whole series, please refer to "Description & Application Manual for 2SP0115T SCALE-2 IGBT Drivers" on [www.IGBT-Driver.com/go/2SP0115T](http://www.IGBT-Driver.com/go/2SP0115T).

The gate resistors on this gate driver are not assembled in order to provide maximum flexibility. For the gate resistors required for specific IGBT modules, refer to the paragraph on "Gate Resistor Assembly". Use of gate resistors other than those specified may result in failure.

### Mechanical Dimensions

Dimensions: See "Description & Application Manual for 2SP0115T SCALE-2 IGBT Drivers"

Mounting principle: Soldered onto 17mm dual IGBT module

### Absolute Maximum Ratings

Parameter	Remarks	Min	Max	Unit
Supply voltage $V_{CC}$	VCC to GND	0	16	V
Logic input and output voltages	To GND	-0.5	$V_{CC}+0.5$	V
$SO_x$ current	Fault condition, total current		20	mA
Gate peak current $I_{out}$	Note 1	-8	+15	A
Average supply current $I_{CC}$	Note 2		290	mA
Output power per gate	Ambient temperature <70°C (Note 3)		1.2	W
	Ambient temperature 85°C (Note 3)		1	W
Turn-on gate resistance	Note 16	1.3		$\Omega$
Turn-off gate resistance	Note 16	1.8		$\Omega$
Switching frequency F	Note 21		n.d.	kHz
Test voltage (50Hz/1min.)	Primary to secondary (Note 17)		5000	$V_{AC(eff)}$
	Secondary to secondary (Note 17)		4000	$V_{AC(eff)}$
DC-link voltage	Note 4		1200	V
$ dV/dt $	Rate of change of input to output voltage (Note 5)		50	kV/ $\mu$ s

## Preliminary Data Sheet

Parameter	Remarks	Min	Max	Unit
Operating voltage	Primary/secondary, secondary/secondary		1700	V <sub>peak</sub>
Operating temperature		-40	+85	°C
Storage temperature		-40	+90	°C

### Recommended Operating Conditions

Parameter	Remarks	Min	Typ	Max	Unit
Supply voltage V <sub>CC</sub>	To GND	14.5	15	15.5	V
Resistance from TB to GND	Blocking time≠0, ext. value	128		∞	kΩ

### Electrical Characteristics

Power Supply	Remarks	Min	Typ	Max	Unit
Supply current I <sub>CC</sub>	Without load		33		mA
Efficiency η	Internal DC/DC converter		85		%
Coupling capacitance C <sub>io</sub>	Primary side to secondary side, total, per channel		23		pF
Power Supply Monitoring	Remarks	Min	Typ	Max	Unit
Supply threshold V <sub>CC</sub>	Primary side, clear fault	11.9	12.6	13.3	V
	Primary side, set fault (Note 6)	11.3	12.0	12.7	V
Monitoring hysteresis	Primary side, set/clear fault	0.35			V
Supply threshold V <sub>isox</sub> -V <sub>eex</sub>	Secondary side, clear fault	12.1	12.6	13.1	V
	Secondary side, set fault (Note 7)	11.5	12.0	12.5	V
Monitoring hysteresis	Secondary side, set/clear fault	0.35			V
Supply threshold V <sub>eex</sub> -V <sub>COMx</sub>	Secondary side, clear fault	5	5.15	5.3	V
	Secondary side, set fault (Note 7)	4.7	4.85	5	V
Monitoring hysteresis	Secondary side, set/clear fault	0.15			V
Logic Inputs and Outputs	Remarks	Min	Typ	Max	Unit
Input impedance	V(INx) = 15V (Note 8)	4.3	4.5	4.6	kΩ
Turn-on threshold	V(INx) (Note 9)		10.5		V
Turn-off threshold	V(INx) (Note 9)		5		V
SOx pull-up resistor to VCC	On board		10		kΩ
SOx output voltage	Fault condition, I(SOx)<6.5mA			0.7	V

## Preliminary Data Sheet

<b>Short-circuit Protection</b>	<b>Remarks</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Vce-monitoring threshold	Between auxiliary terminals		10.2		V
Response time	DC-link voltage > 550V (Note 10)		5.4		µs
Delay to IGBT turn-off	After the response time (Note 11)		1.4		µs
Blocking time	After fault (Note 12)		90		ms
<b>Timing Characteristics</b>	<b>Remarks</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Turn-on delay $t_{d(on)}$	Note 13		80		ns
Turn-off delay $t_{d(off)}$	Note 13		60		ns
Jitter of turn-on delay	Note 19		±2		ns
Jitter of turn-off delay	Note 19		±2		ns
Output rise time $t_{r(out)}$	G <sub>x</sub> to E <sub>x</sub> (Note 14)		5		ns
Output fall time $t_{f(out)}$	G <sub>x</sub> to E <sub>x</sub> (Note 14)		10		ns
Dead time between outputs	Half-bridge mode (Note 20)		3		µs
Jitter of dead time	Half-bridge mode		±50		ns
Transmission delay of fault state	Note 15		400		ns
<b>Outputs</b>	<b>Remarks</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Turn-on gate resistor R <sub>g(on)</sub>	Note 16		not assembled		Ω
Turn-off gate resistor R <sub>g(off)</sub>	Note 16		not assembled		Ω
Gate voltage at turn-on			15		V
Gate-voltage at turn-off	P = 0W		-9.2		V
	P = 1.2W		-7.1		V
Gate resistance to COMx			4.7		kΩ
<b>Electrical Isolation</b>	<b>Remarks</b>	<b>Min</b>	<b>Typ</b>	<b>Max</b>	<b>Unit</b>
Test voltage (50Hz/1s)	Primary to secondary side (Note 17)	5000	5050	5100	V <sub>eff</sub>
	Secondary to secondary side (Note 17)	4000	4050	4100	V <sub>eff</sub>
Partial discharge extinction volt.	Primary to secondary side (Note 18)	1768			V <sub>peak</sub>
	Secondary to secondary side (Note 18)	1700			V <sub>peak</sub>
Creepage distance	Primary to secondary side	12.6			mm
	Secondary to secondary side	6.6			mm
	Primary to NTC	6.5			mm
Clearance distance	Primary to secondary side	12.3			mm
	Secondary to secondary side	6.6			mm
	Primary to NTC	6.5			mm

All data refer to +25°C and V<sub>CC</sub> = 15V unless otherwise specified

---

## Preliminary Data Sheet

### Footnotes to the Key Data

- 1) The gate current is limited by the gate resistors located on the driver.
- 2) If the specified value is exceeded, this indicates a driver overload. It should be noted that the driver is not protected against overload.
- 3) If the specified value is exceeded, this indicates a driver overload. It should be noted that the driver is not protected against overload. From 70°C to 85°C, the maximum permissible output power can be linearly interpolated from the given data.
- 4) This limit is due to active clamping. Refer to the "Description & Application Manual for 2SP0115T SCALE-2 IGBT Drivers".
- 5) This specification guarantees that the drive information will be transferred reliably even at a high DC-link voltage and with ultra-fast switching operations.
- 6) Undervoltage monitoring of the primary-side supply voltage (VCC to GND). If the voltage drops below this limit, a fault is transmitted to the corresponding outputs and the IGBTs are switched off.
- 7) Undervoltage monitoring of the secondary-side supply voltage (Visox to Veex and Veex to COMx which correspond with the approximate turn-on and turn-off gate-emitter voltages). If the corresponding voltage drops below this limit, the IGBT is switched off and a fault is transmitted to the corresponding output.
- 8) The input impedance can be modified (customer-specific solution).
- 9) Turn-on and turn-off threshold values can be modified (customer-specific solution).
- 10) The resulting pulse width of the direct output of the gate drive unit for short-circuit type I (excluding the delay of the gate resistors) is the sum of response time plus delay to IGBT turn-off.
- 11) The turn-off event of the IGBT is delayed by the specified time after the response time.
- 12) Factory set value. The blocking time can be reduced with an external resistor. Refer to the "Description & Application Manual for 2SP0115T SCALE-2 IGBT Drivers".
- 13) Measured from the transition of the turn-on or turn-off command at the driver input to direct output of the gate drive unit (excluding the delay of the gate resistors).
- 14) Output rise and fall times are measured between 10% and 90% of the nominal output swing with an output load of 10Ω and 40nF. The values are given for the driver side of the gate resistors. The time constant of the output load in conjunction with the present gate resistors leads to an additional delay at the load side of the gate resistors.
- 15) Transmission delay of the fault state from the secondary side to the primary status outputs.
- 16) The gate resistors are not assembled on this IGBT gate driver. They must be assembled by the user according to the paragraph on "Gate Resistor Assembly".
- 17) HiPot testing (= dielectric testing) must generally be restricted to suitable components. This gate driver is suited for HiPot testing. Nevertheless, it is strongly recommended to limit the testing time to 1s slots as stipulated by EN 50178. Excessive HiPot testing at voltages much higher than 1200V<sub>AC(eff)</sub> may lead to insulation degradation. No degradation has been observed over 1min. testing at 5000V<sub>AC(eff)</sub>. Every production sample shipped to customers has undergone 100% testing at the given value for 1s.
- 18) Partial discharge measurement is performed in accordance with IEC 60270 and isolation coordination specified in EN 50178. The partial discharge extinction voltage between primary and either secondary side is coordinated for safe isolation to EN 50178.
- 19) Jitter measurements are performed with input signals INx switching between 0V and 15V referred to GND, with a corresponding rise time and fall time of 8ns.
- 20) Note that the dead time may vary from sample to sample. A tolerance of approximately ±20% may be expected. If higher timing precisions are required, CONCEPT recommends using direct mode and generating the dead time externally.
- 21) The maximum switching frequency is not defined, as it depends on the IGBT module used. Please consult the corresponding driver data sheet for more information.

## Preliminary Data Sheet

### Gate Resistor Assembly

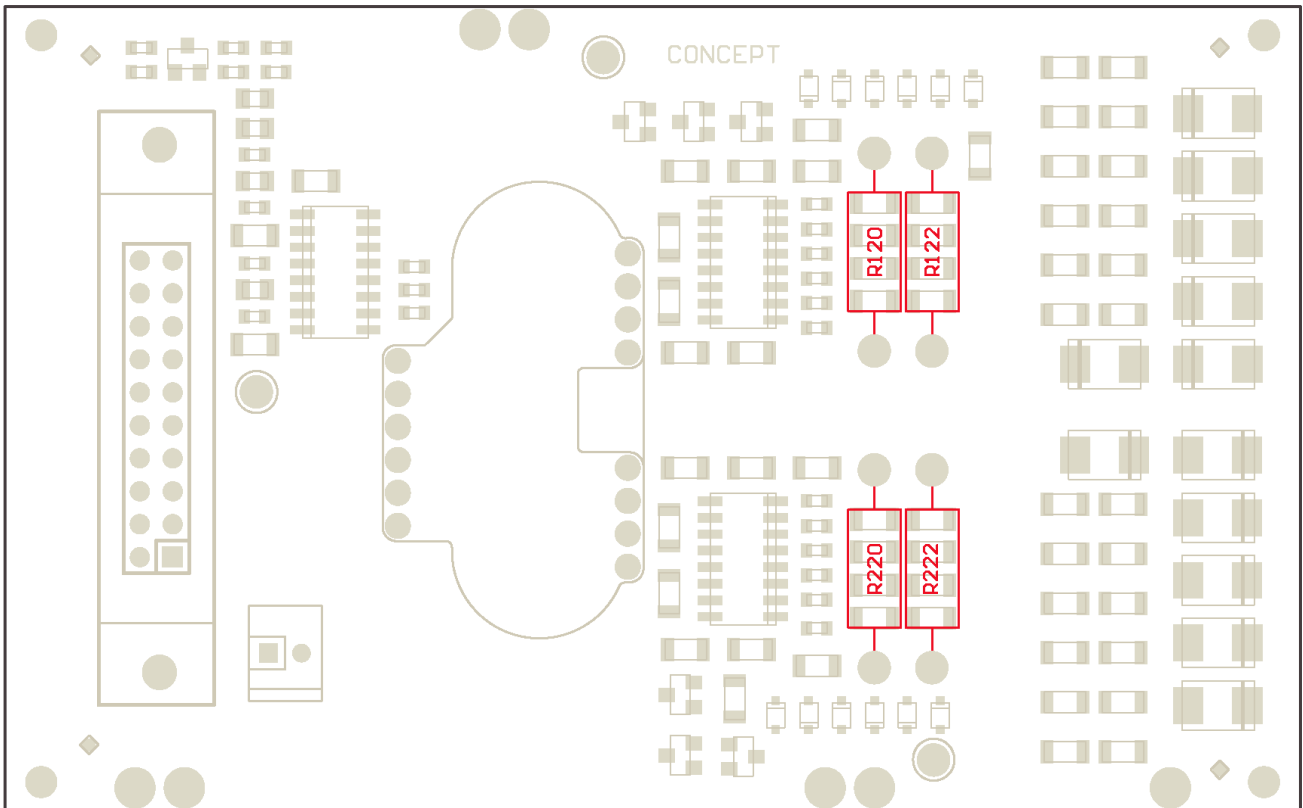
The turn-on and turn-off gate resistors of 2SP0115T drivers are adapted to their respective IGBT modules. Recommended gate resistors are: PR02 / 2W / 5% from Vishay.

The following versions exist:

<b>1700V IGBT Type</b>	<b>Rg,on (R120/R220)</b>	<b>Rg,off (R122/R222)</b>
FF225R17ME4	3.3Ω	8.2Ω
2MBI300VN-170-50	4.7Ω	3.3Ω
FF300R17ME3	4.7Ω	6.8Ω
FF300R17ME4	3.3Ω	6.8Ω
2MBI450U4N-170-50	3.3Ω	1.1Ω
2MBI450VN-170-50	3.3Ω	2.2Ω
FF450R17ME3	3.3Ω	4.7Ω
FF450R17ME4	3.3Ω	4.7Ω
2MBI550VN-170-50	3.3Ω	2.2Ω
FF600R17ME4	1Ω	1.5Ω

For the component position, refer to Fig. 1.

## Preliminary Data Sheet

**Assembly Drawing**

*Fig. 1: Assembly drawing of 2SP0115T with highlighted gate resistors*

Note that the wires of the gate resistors should not project more than 1.6mm after soldering (excess length at bottom side). Furthermore, a minimum distance of 1mm must be maintained between the gate resistor body and the PCB.

**Legal Disclaimer**

This data sheet specifies devices but cannot promise to deliver any specific characteristics. No warranty or guarantee is given – either expressly or implicitly – regarding delivery, performance or suitability.

CT-Concept Technologie GmbH reserves the right to make modifications to its technical data and product specifications at any time without prior notice. The general terms and conditions of delivery of CT-Concept Technologie GmbH apply.

## Preliminary Data Sheet

### Ordering Information

The general terms and conditions of delivery of CT-Concept Technologie GmbH apply.

<b>CONCEPT Driver Type #</b>	<b>Related IGBT</b>
2SP0115T2C0-17 (Only 15V logic supported)	1700V IGBT modules

Product home page: [www.IGBT-Driver.com/go/2SP0115T](http://www.IGBT-Driver.com/go/2SP0115T)

Refer to [www.IGBT-Driver.com/go/nomenclature](http://www.IGBT-Driver.com/go/nomenclature) for information on driver nomenclature

### Information about Other Products

**For other drivers, evaluation systems product documentation and application support**

Please click: [www.IGBT-Driver.com](http://www.IGBT-Driver.com)

### Manufacturer

CT-Concept Technologie GmbH  
 A Power Integrations Company  
 Johann-Renfer-Strasse 15  
 2504 Biel-Bienne  
 Switzerland

Phone +41 - 32 - 344 47 47  
 Fax +41 - 32 - 344 47 40

E-mail [Info@IGBT-Driver.com](mailto:Info@IGBT-Driver.com)  
 Internet [www.IGBT-Driver.com](http://www.IGBT-Driver.com)

© 2009...2014 CT-Concept Technologie GmbH - Switzerland.  
 We reserve the right to make any technical modifications without prior notice.

All rights reserved.  
 Version 2.0 from 2014-03-24



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Power Integrations:](#)

[2SP0115T2C0-17](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.