

RJA Series

Features

- 105°C, wide temperature range
- Suitable for high reliability products
- RoHS Compliance




Sleeve & Marking Color: Deep Purple & White

Specifications

Items	Performance																																																
Category Temperature Range	6.3 ~ 63V	100V																																															
	-55°C ~ +105°C	-40°C ~ +105°C																																															
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																																
Leakage Current (at 20°C)	I = 0.01CV or 3 (µA) whichever is greater (after 2 minutes) Where, C = rated capacitance in µF V = rated DC working voltage in V																																																
Tanδ (at 120 Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Tanδ (max)</td> <td>0.23</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </tbody> </table>		Rated Voltage	6.3	10	16	25	35	50	63	100	Tanδ (max)	0.23	0.20	0.16	0.14	0.12	0.10	0.09	0.08																													
	Rated Voltage	6.3	10	16	25	35	50	63	100																																								
Tanδ (max)	0.23	0.20	0.16	0.14	0.12	0.10	0.09	0.08																																									
When the capacitance exceeds 1,000µF, 0.02 shall be added every 1,000µF increase.																																																	
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.																																																
	<table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td rowspan="4">Impedance Ratio</td> <td>Z(-25°C)</td> <td>φ D < 16</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>/Z(+20°C)</td> <td>φ D ≥ 16</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> </tr> <tr> <td>Z(-40/-55°C)</td> <td>φ D < 16</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> <tr> <td>/Z(+20°C)</td> <td>φ D ≥ 16</td> <td>12</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>6</td> </tr> </tbody> </table>		Rated Voltage		6.3	10	16	25	35	50	63	100	Impedance Ratio	Z(-25°C)	φ D < 16	4	3	3	2	2	2	2	/Z(+20°C)	φ D ≥ 16	5	4	3	2	2	2	3	Z(-40/-55°C)	φ D < 16	8	6	4	4	4	3	3	/Z(+20°C)	φ D ≥ 16	12	8	6	4	3	3	6
	Rated Voltage		6.3	10	16	25	35	50	63	100																																							
	Impedance Ratio	Z(-25°C)	φ D < 16	4	3	3	2	2	2	2																																							
/Z(+20°C)		φ D ≥ 16	5	4	3	2	2	2	3																																								
Z(-40/-55°C)		φ D < 16	8	6	4	4	4	3	3																																								
/Z(+20°C)		φ D ≥ 16	12	8	6	4	3	3	6																																								
<table border="1"> <thead> <tr> <th>Test Time</th> <th>2,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table>		Test Time	2,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value																																								
Test Time	2,000 Hrs																																																
Capacitance Change	Within ±20% of initial value																																																
Tanδ	Less than 200% of specified value																																																
Leakage Current	Within specified value																																																
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 2,000 hours at 105°C.																																																	
Shelf Life Test	<table border="1"> <thead> <tr> <th>Test Time</th> <th>1,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table>		Test Time	1,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value																																							
	Test Time	1,000 Hrs																																															
	Capacitance Change	Within ±20% of initial value																																															
	Tanδ	Less than 200% of specified value																																															
Leakage Current	Within specified value																																																
* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.																																																	
Ripple Current and Frequency Multipliers	<table border="1"> <thead> <tr> <th rowspan="2">Cap.(µF)</th> <th colspan="5">Freq.(Hz)</th> </tr> <tr> <th>60 (50)</th> <th>120</th> <th>500</th> <th>1k</th> <th>10k up</th> </tr> </thead> <tbody> <tr> <td>Under 100</td> <td>0.70</td> <td>1.00</td> <td>1.30</td> <td>1.40</td> <td>1.50</td> </tr> <tr> <td>100 < C ≤ 1,000</td> <td>0.75</td> <td>1.00</td> <td>1.20</td> <td>1.30</td> <td>1.35</td> </tr> <tr> <td>1,000 up above</td> <td>0.80</td> <td>1.00</td> <td>1.10</td> <td>1.12</td> <td>1.15</td> </tr> </tbody> </table>		Cap.(µF)	Freq.(Hz)					60 (50)	120	500	1k	10k up	Under 100	0.70	1.00	1.30	1.40	1.50	100 < C ≤ 1,000	0.75	1.00	1.20	1.30	1.35	1,000 up above	0.80	1.00	1.10	1.12	1.15																		
	Cap.(µF)	Freq.(Hz)																																															
		60 (50)	120	500	1k	10k up																																											
	Under 100	0.70	1.00	1.30	1.40	1.50																																											
100 < C ≤ 1,000	0.75	1.00	1.20	1.30	1.35																																												
1,000 up above	0.80	1.00	1.10	1.12	1.15																																												

Diagram of Dimensions

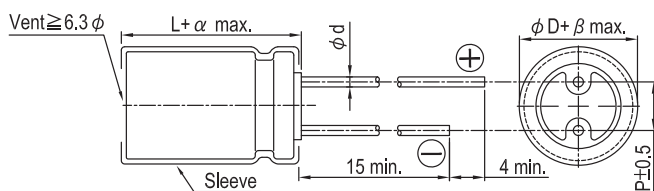

Lead Spacing and Diameter Unit: mm

	5	6.3	8	10	12.5	16	18
φ D	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φ d	0.5		0.6		0.8		
α	L < 20: 1.5, L ≥ 20: 2.0						
β	0.5						



Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 120 Hz, 105°C

Dimension and Permissible Ripple Current

Cap. (μF)	Rated Volt. (V _{DC}) Contents	6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63V (1J)		100V (2A)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
2.2	2R2											5×11	20			5×11	26
3.3	3R3											5×11	30			5×11	31
4.7	4R7											5×11	33	5×11	36	6.3×11	40
10	100											5×11	50	5×11	54	6.3×11	54
22	220											5×11	78	6.3×11	86	6.3×11 8×11.5	93 111
33	330									5×11	85	5×11	90	6.3×11	100	8×11.5 10×12.5	144 183
47	470							5×11	97	5×11	90	6.3×11	117	6.3×11	129	10×12.5	204
100	101					5×11	110	6.3×11	142	6.3×11	150	8×11.5	188	10×12.5	235	10×20	285
220	221			5×11	150	6.3×11	180	8×11.5	236	8×11.5	270	10×16	335	10×20	400	12.5×25	440
330	331			6.3×11	200	8×11.5	260	8×11.5	330	10×12.5	350	10×16 10×20	410 460	10×20 12.5×20	490 520	16×25	478
470	471	6.3×11	230	6.3×11 8×11.5	250 290	8×11.5	310	10×12.5	380	10×16	460	12.5×20	590	12.5×20 12.5×25	665 720	16×31.5	688
1,000	102	8×11.5	380	10×12.5	460	10×16	560	10×20	680	12.5×20	830	16×25	1,080	16×25	1,190		
2,200	222	10×16	690	10×20	760	12.5×20	920	12.5×25	1,090	16×25	1,260	16×35.5	1,470				
3,300	332	10×20	840	12.5×20	1,100	12.5×25	1,170	16×25	1,400	16×35.5	1,610	18×35.5	1,650				
4,700	472	12.5×20	1,090	12.5×25	1,260	16×25	1,480	16×31.5	1,710	18×35.5	1,900						
6,800	682	12.5×25	1,460	16×25	1,690	16×31.5	1,930	18×35.5	2,160								
10,000	103	16×25	1,990	16×31.5	2,220	18×31.5	2,330										
22,000	223	18×35.5	2,930	18×40	3,230												

Part Numbering System

RJA Series	470 μF	$\pm 20\%$	6.3V	Bulk Package	Gas Type	6.3 $\phi \times 11L$	Pb-free and PET sleeve
RJA	471	M	0J	BK	-	0611	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Sleeve type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 13.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.