

# Type EDL , Electric Double Layer Supercapacitors

## Ultra High Capacitance, Small Case Size Options



Type EDL electric double layer supercapacitors offer extremely high capacitance values (farads) in a variety of packaging options that will satisfy, low profile, surface mount, through hole and high density assembly requirements. The EDL is a cut above the standard electrolytic capacitor in that it can act as a battery without having to deal with the environmental or hazardous material issues that batteries entail.

### Highlights

- Unlimited charging and discharging capability
- Recycling is not necessary
- Long Life - 15 years
- Low ESR
- Will extend battery life up to 1.6 times
- First class performance with economy pricing

### Specifications

|                             |                    |
|-----------------------------|--------------------|
| Operating Temperature Range | -25 °C to +85 °C   |
| Rated Voltage Range         | 2.1 Vdc to 5.5 Vdc |
| Capacitance Range           | 0.022 F to 70 F    |

### How To Select an Electric Double Layer Capacitor


| Estimated Initial Backup Time                                  | Back-up time for Type EDL Electric Double Layer Supercapacitors decreases with use and over time especially when the current is large or operating at high temperature. Be sure to specify extra back-up time initially to allow for product changes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                 |                                       |                |              |  |  |         |                 |                 |                |              |            |        |        |      |   |   |   |        |        |        |   |   |    |   |       |   |   |   |    |   |   |   |        |     |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------|----------------|--------------|--|--|---------|-----------------|-----------------|----------------|--------------|------------|--------|--------|------|---|---|---|--------|--------|--------|---|---|----|---|-------|---|---|---|----|---|---|---|--------|-----|
| Select the optimum supercapacitor according to applied current | <p>The internal resistance of the supercapacitor prevents drawing high discharge currents. Select the supercapacitor capable of delivering the peak current at switchover to back-up mode using the following table.</p> <table><tr><th rowspan="2">Series</th><th colspan="5">Maximum Operating (Discharge) Current</th></tr><tr><th>0.047 F</th><th>0.1 F to 0.33 F</th><th>0.47 F to 1.5 F</th><th>3.3 F to 4.7 F</th><th>10 F to 50 F</th></tr><tr><td>SG, SD, NF</td><td>200 μA</td><td>300 μA</td><td>1 mA</td><td>–</td><td>–</td></tr><tr><td>F</td><td>200 μA</td><td>300 μA</td><td>300 μA</td><td>–</td><td>–</td></tr><tr><td>EN</td><td>–</td><td>10 μA</td><td>–</td><td>–</td><td>–</td></tr><tr><td>HW</td><td>–</td><td>–</td><td>–</td><td>300 mA</td><td>1 A</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                                     | Series          | Maximum Operating (Discharge) Current |                |              |  |  | 0.047 F | 0.1 F to 0.33 F | 0.47 F to 1.5 F | 3.3 F to 4.7 F | 10 F to 50 F | SG, SD, NF | 200 μA | 300 μA | 1 mA | – | – | F | 200 μA | 300 μA | 300 μA | – | – | EN | – | 10 μA | – | – | – | HW | – | – | – | 300 mA | 1 A |
| Series                                                         | Maximum Operating (Discharge) Current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                 |                                       |                |              |  |  |         |                 |                 |                |              |            |        |        |      |   |   |   |        |        |        |   |   |    |   |       |   |   |   |    |   |   |   |        |     |
|                                                                | 0.047 F                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 0.1 F to 0.33 F | 0.47 F to 1.5 F                       | 3.3 F to 4.7 F | 10 F to 50 F |  |  |         |                 |                 |                |              |            |        |        |      |   |   |   |        |        |        |   |   |    |   |       |   |   |   |    |   |   |   |        |     |
| SG, SD, NF                                                     | 200 μA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 300 μA          | 1 mA                                  | –              | –            |  |  |         |                 |                 |                |              |            |        |        |      |   |   |   |        |        |        |   |   |    |   |       |   |   |   |    |   |   |   |        |     |
| F                                                              | 200 μA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 300 μA          | 300 μA                                | –              | –            |  |  |         |                 |                 |                |              |            |        |        |      |   |   |   |        |        |        |   |   |    |   |       |   |   |   |    |   |   |   |        |     |
| EN                                                             | –                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 10 μA           | –                                     | –              | –            |  |  |         |                 |                 |                |              |            |        |        |      |   |   |   |        |        |        |   |   |    |   |       |   |   |   |    |   |   |   |        |     |
| HW                                                             | –                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | –               | –                                     | 300 mA         | 1 A          |  |  |         |                 |                 |                |              |            |        |        |      |   |   |   |        |        |        |   |   |    |   |       |   |   |   |    |   |   |   |        |     |
| Back Up Time Example                                           | <p>Back-up time is the time it takes for the applied voltage to decay to the cut-off voltage set by the user after applying the application’s maximum voltage at application maximum temperature.</p> <p>Example: An F Type EDL, P/N EDLF105B5R5C (Rated at 5.5 V, 1.0 F) is charged to 5.0 Vdc. The circuit requirement is such that it must maintain a memory circuit with a current drain of 10 μA in an ambient temperature of +40 °C. The memory RTC cut-off voltage is 2.0 Vdc. Using minimum capacitance, calculate the back-up time as follows:</p> $t = C\Delta V / I = C[V_0 - (i \cdot R) - V_1] / (i + i_L)$ $C = 1.0 \text{ F} - 20\% = 0.8 \text{ F}, R = 50 \Omega, V_0 = 5 \text{ V}, V_1 = 2 \text{ V}, i = 10 \mu\text{A}$ <p>Therefore,</p> $t = 0.8 (5 - 0.0005 - 2) / ((10 + 2) \times 10^{-6}) = 55 \text{ hours}$ <p>And thus the initial back-up time is 55 hours. After 1000 hours, calculate the back-up time will drop to about 38 hours.</p> <p>t: Back-up time (s)<br/>C: Capacitance of Type EDL (F)<br/>V<sub>0</sub>: Applied voltage (V)<br/>V<sub>1</sub>: Cut-off voltage (V)<br/>i: Current during back-up (A)<br/>i<sub>L</sub>: Leakage current (A)<br/>R: Internal resistance (Ω) at 1 kHz</p> |                 |                                       |                |              |  |  |         |                 |                 |                |              |            |        |        |      |   |   |   |        |        |        |   |   |    |   |       |   |   |   |    |   |   |   |        |     |

# Type EDL , Electric Double Layer Supercapacitors

## Ultra High Capacitance, Small Case Size Options

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Life Design           | <p>Type EDL supercapacitors have a useful lifetime that decreases with increasing operating temperature, humidity, applied-voltage, current and backup-time requirements.</p> <p>Expected lifetime is the product of four factors:</p> <p>Expected Life = (Lifetime)•(Temperature Factor)•(Voltage Factor)•(Moisture Factor)</p>                                                                                                                                                                        |
| Lifetime              | <p>The minimum rated life at 85 °C with 5.5 Vdc applied is 1000 hours with maximum permitted end-of-life capacitance change of –30% and a 4 times increase in internal resistance.</p>                                                                                                                                                                                                                                                                                                                  |
| Temperature Factor    | <p>To determine the effect of temperature on expected life of a supercapacitor, use the fact that expected lifetime doubles for each 10 °C that the operating temperature is reduced. As an illustration, at 85 °C and full voltage the rated lifetime is 1000 hours. So, at 40 °C the expected lifetime would be multiplied by <math>2^{(85-40)/10} = 2^{4.5} = 22.6</math> times. The Temperature Factor is 22.6, and for 1000-h, 85 °C rated life, the expected 40 °C life would be 22600 hours.</p> |
| Voltage Factor        | <p>The rate of change of capacitance decreases with decreasing applied voltage. The effect on life extension is roughly proportional to the voltage derating, e.g., 5 V applied to 5.5 V rated supercapacitors extends the life 1.1 times.</p>                                                                                                                                                                                                                                                          |
| Moisture Factor       | <p>Expected life of these supercapacitors is considerably shortened by operation in high humidity. The applications discussed here assume that the relative humidity is no more than 50%.</p>                                                                                                                                                                                                                                                                                                           |
| Expected Life Example | <p>So, for a 5.5 V supercapacitor at 40 °C charged to 5.V in less than 50% RH the expected life is:</p> <p>Expected Life = (Lifetime) (Temperature Factor) (Voltage Factor) (Moisture Factor)</p> <p>= (1000 h) (22.6) (1.1) (1)</p> <p>= 24800 hours</p> <p>= 2.8 years</p>                                                                                                                                                                                                                            |
| RoHS Compliant        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## Electric Double Layer Supercapacitor Construction

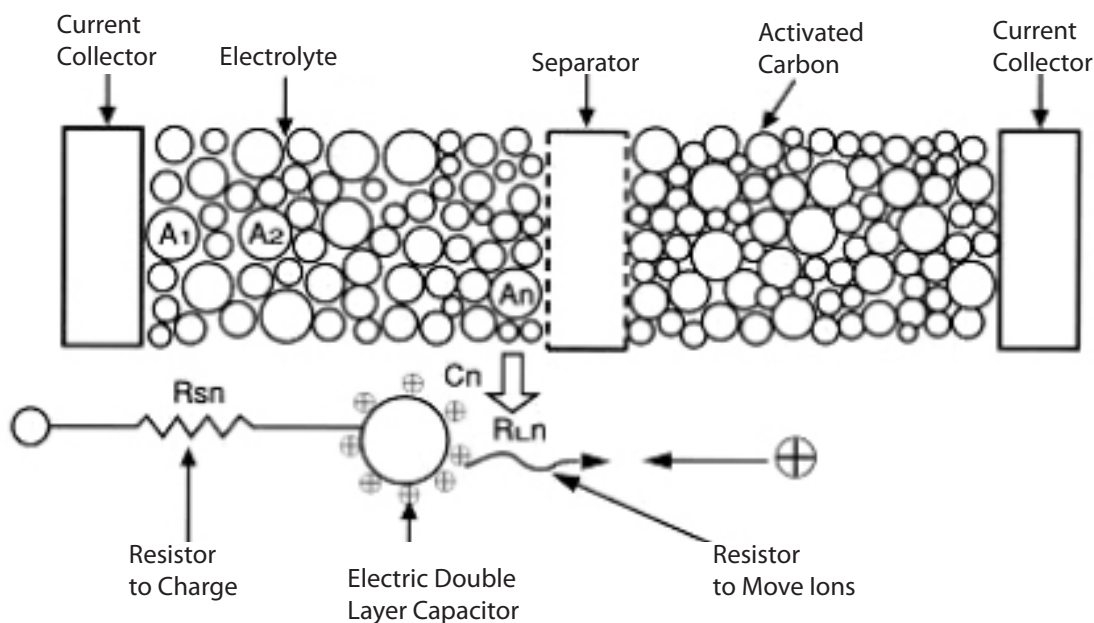

# Type EDL , Electric Double Layer Supercapacitors

## Ratings

| Catalog Part Number | Capacitance | Voltage (Vdc) | Max. Resistance @ 1 kHz (Ω) | Case Type       | Case Dia. (mm) | Case Length (mm) | Style                                                                                                 |
|---------------------|-------------|---------------|-----------------------------|-----------------|----------------|------------------|-------------------------------------------------------------------------------------------------------|
| EDLHW335D2R3R**     | 3.3 F       | 2.3           | 0.3                         | Radial Lead     | 12.5           | 23               | HW<br>             |
| EDLHW475D2R3R**     | 4.7 F       |               | 0.3                         |                 | 12.5           | 23               |                                                                                                       |
| EDLHW106D2R3R       | 10 F        |               | 0.2                         |                 | 12.5           | 35               |                                                                                                       |
| EDLHW226D2R3R       | 22 F        |               | 0.1                         |                 | 18             | 35               |                                                                                                       |
| EDLHW306D2R3R**     | 30 F        |               | 0.1                         |                 | 18             | 35               |                                                                                                       |
| EDLHW506D2R3R**     | 50 F        |               | 0.1                         |                 | 18             | 40               |                                                                                                       |
| EDLHW706D2R1R**     | 70 F        | 2.1           | 0.1                         |                 | 18             | 50               |                                                                                                       |
| EDLF473A5R5C        | 0.047 F     | 5.5           | 120                         | Stacked Coin    | 13.5           | 9.5              | F<br><br>+85 °C    |
| EDLF104A5R5C        | 0.10 F      |               | 100                         |                 | 13.5           | 9.5              |                                                                                                       |
| EDLF474B5R5C        | 0.47 F      |               | 75                          |                 | 21.5           | 9.5              |                                                                                                       |
| EDLF684B5R5C        | 0.68 F      |               | 50                          |                 | 21.5           | 9.5              |                                                                                                       |
| EDLF105B5R5C        | 1.00 F      |               | 50                          |                 | 21.5           | 9.5              |                                                                                                       |
| EDLNF104A5R5C       | .10 F       | 5.5           | 75                          | Stacked Coin    | 13.5           | 7.5              | NF<br><br>+70 °C   |
| EDLNF224A5R5C       | .22 F       |               | 75                          |                 | 13.5           | 7.5              |                                                                                                       |
| EDLNF474B5R5C       | .47 F       |               | 30                          |                 | 21.5           | 8.0              |                                                                                                       |
| EDLNF105B5R5C       | 1.0 F       |               | 30                          |                 | 21.5           | 8.0              |                                                                                                       |
| EDLNF155B5R5C       | 1.5 F       |               | 30                          |                 | 21.5           | 8.0              |                                                                                                       |
| EDLSG474V5R5C       | .47 F       | 5.5           | 30                          | Stacked Coin    | 19             | 5.0              | SG<br><br>+70 °C |
| EDLSG105V5R5C       | 1.0 F       |               | 30                          |                 | 19             | 5.0              |                                                                                                       |
| EDLSG155V5R5C       | 1.5 F       |               | 30                          |                 | 19             | 5.0              |                                                                                                       |
| EDLSG474H5R5C       | .47 F       | 5.5           | 30                          | Stacked Coin    | 20             | 6.0              |                                                                                                       |
| EDLSG105H5R5C       | 1.0 F       |               | 30                          |                 | 20             | 6.0              |                                                                                                       |
| EDLSG155H5R5C       | 1.5 F       |               | 30                          |                 | 20             | 6.0              |                                                                                                       |
| EDLSD223V5R5C       | .022 F      | 5.5           | 150                         | Stacked Coin    | 10.5           | 5.0              | SD<br><br>+70 °C |
| EDLSD473V5R5C       | .047 F      |               | 120                         |                 | 10.5           | 5.0              |                                                                                                       |
| EDLSD104V5R5C       | .10 F       |               | 75                          |                 | 10.5           | 5.0              |                                                                                                       |
| EDLSD224V5R5C       | .22 F       |               | 75                          |                 | 10.5           | 5.0              |                                                                                                       |
| EDLSD334V5R5C       | .33 F       |               | 75                          |                 | 10.5           | 5.0              |                                                                                                       |
| EDLSD223H5R5C       | .022 F      | 5.5           | 150                         | Stacked Coin    | 11.5           | 5.5              |                                                                                                       |
| EDLSD473H5R5C       | .047 F      |               | 120                         |                 | 11.5           | 5.5              |                                                                                                       |
| EDLSD104H5R5C       | .10 F       |               | 75                          |                 | 11.5           | 5.5              |                                                                                                       |
| EDLSD224H5R5C       | .22 F       |               | 75                          |                 | 11.5           | 5.5              |                                                                                                       |
| EDLSD334H5R5C       | .33 F       |               | 75                          |                 | 11.5           | 5.5              |                                                                                                       |
| EDLEN204A3R3S**     | .20 F       | 3.3           | 200                         | SMT Wide Lead   | 6.8            | 1.8              |                  |
| EDLEN204RL3R3S**    | .20 F       | 3.3           | 200                         | SMT Radial Lead | 6.8            | 1.8              |                                                                                                       |


\*\* Product is obsolete and no longer available.

# Type EDL , Electric Double Layer Supercapacitors

## Outline Drawing and Dimensions

Dimensions in mm (not to scale)


### Style HW 70° C\* Radial Lead

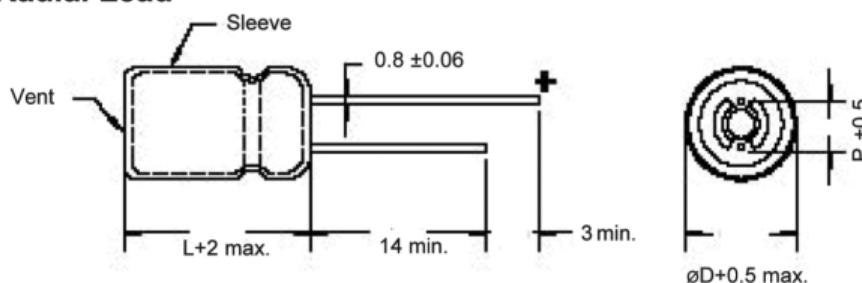

| D    | P   |
|------|-----|
| 12.5 | 5   |
| 18   | 7.5 |


\* 30, 50, 70 F : +60 °C

### Style F 85° C Stacked Coin

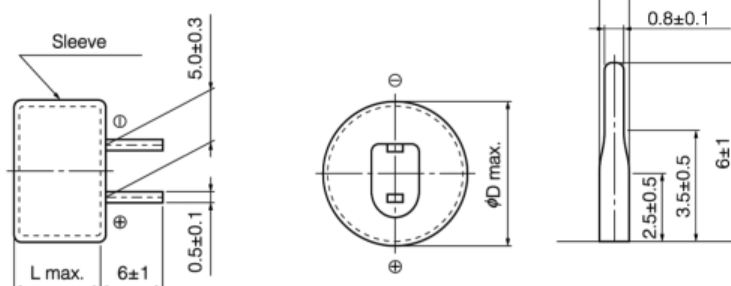

| Case code | Size |     |
|-----------|------|-----|
|           | D    | L   |
| A         | 13.5 | 9.5 |
| B         | 21.5 | 9.5 |

### Style NF 70° C Stacked Coin

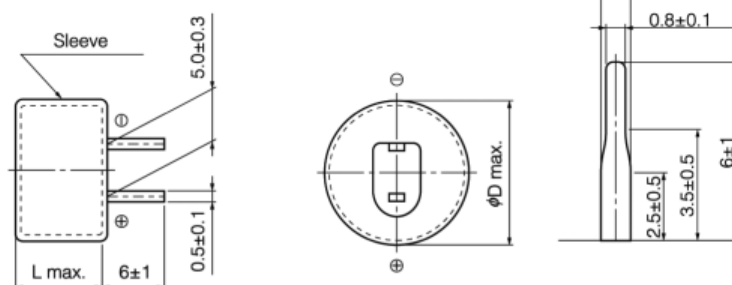


| Case code | Size |     |
|-----------|------|-----|
|           | D    | L   |
| A         | 13.5 | 7.5 |
| B         | 21.5 | 8.0 |


### Style SG 70° C Stacked Coin



Terminal V

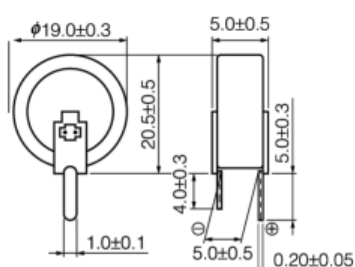


Terminal H

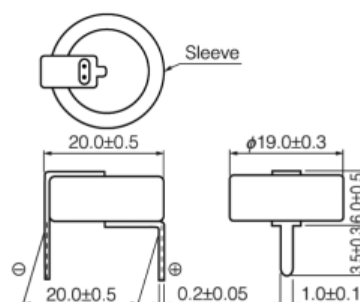


# Type EDL , Electric Double Layer Supercapacitors

## Outline Drawing and Dimensions

### Style SD 70 °C Stacked Coin

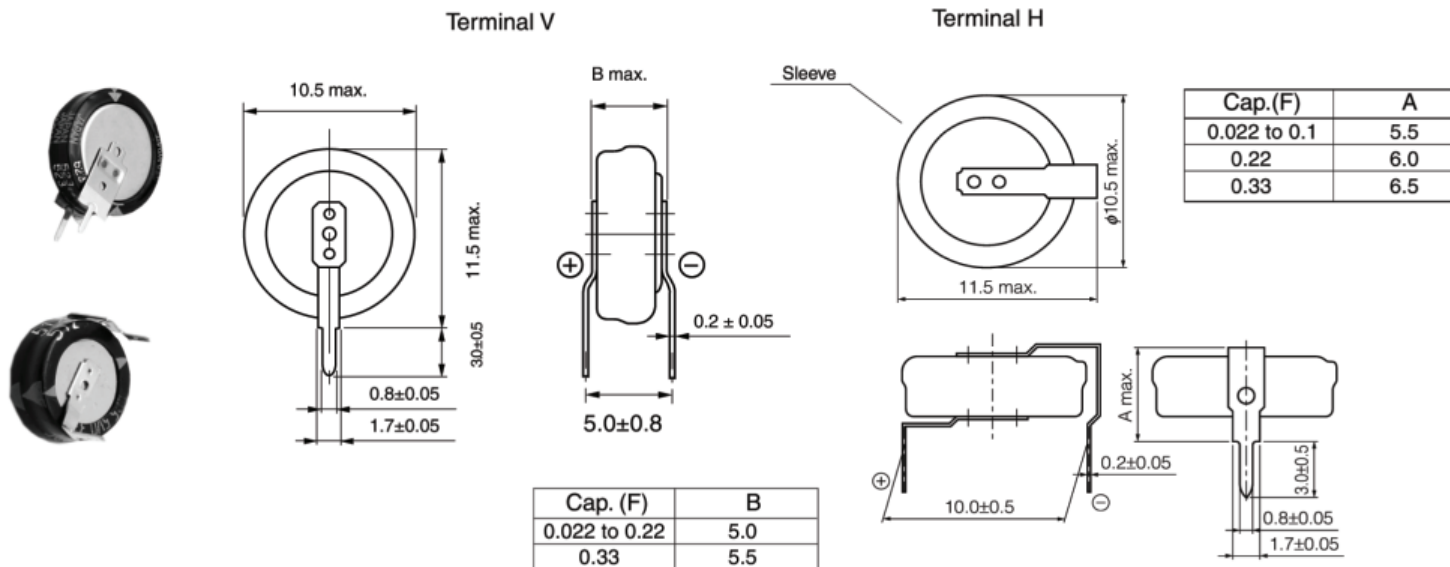

### Style EN -10 to +60 °C Surface Mount

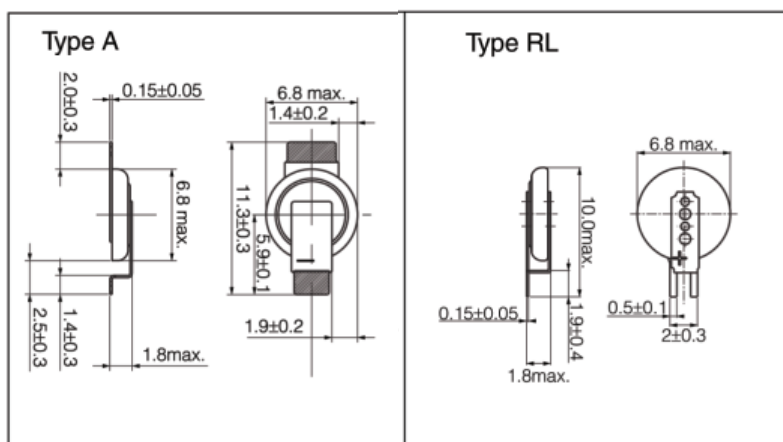

#### Notes:

- 1 - Style EN is packaged on 24 mm wide tape and a 330 mm dia. reel, with 2000 pieces per reel.
- 2 - Only Style EN is capable of reflow soldering. Peak reflow soldering temperature is 250 °C for a maximum of 5 seconds, with a maximum of 30 seconds at or above 220 °C.
- 3 - Do not reflow solder when the cell voltage is above 0.3 V.

# Type EDL , Electric Double Layer Supercapacitors

## Applications and Recommended Series


| Application                         | Function                            | Recommended Series | Component                                                                                                                                                                                                                                                         |
|-------------------------------------|-------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mobile Phones                       | Real-Time Clock Back-Up             | EN                 |                                                                                                                                                                                |
| PDA                                 | Real-Time Clock Back-Up             |                    |                                                                                                                                                                                                                                                                   |
| DSC                                 | Real-Time Clock Back-Up             | EN, SD             |                                                                                             |
| DVD Recorder                        | Real-Time Clock and Channel Back-Up | SD, SG             |                                                                                             |
| Digital TV                          | Real-Time Clock and Channel Back-Up | SD, SG NF          |          |
| PC, Server                          | Real-Time Clock and Channel Back-Up | F                  |                                                                                                                                                                                |
| Mobile Phone Base Station           | Real-Time Clock and Channel Back-Up |                    |                                                                                                                                                                                                                                                                   |
| Inkjet Printer                      | Time and Impact Back-Up             | SD, SG, NF         |    |
| Electric Power Gas and Water Meters | Real-Time Clock and Data Back-Up    | F                  |                                                                                                                                                                              |
| LED Light with Solar Battery        | LED Lighting at Night               | HW                 |                                                                                                                                                                              |
| Toys                                | Motor Drives                        |                    |                                                                                                                                                                                                                                                                   |
| Toy Games                           | Real-Time Clock Back-Up             | EN                 |                                                                                                                                                                              |
| Robot                               | Real-Time Clock and Data Back-Up    | F                  |                                                                                                                                                                              |
| Car Audio Memory                    | Real-Time Clock Back-Up             |                    |                                                                                                                                                                                                                                                                   |

# Type EDL , Electric Double Layer Supercapacitors

## Performance Data


### Self-Discharging Characteristics Versus Charging Time

Part number: EDLF105B5R5C (5.5 V 1.0 F) Charge voltage: 5V

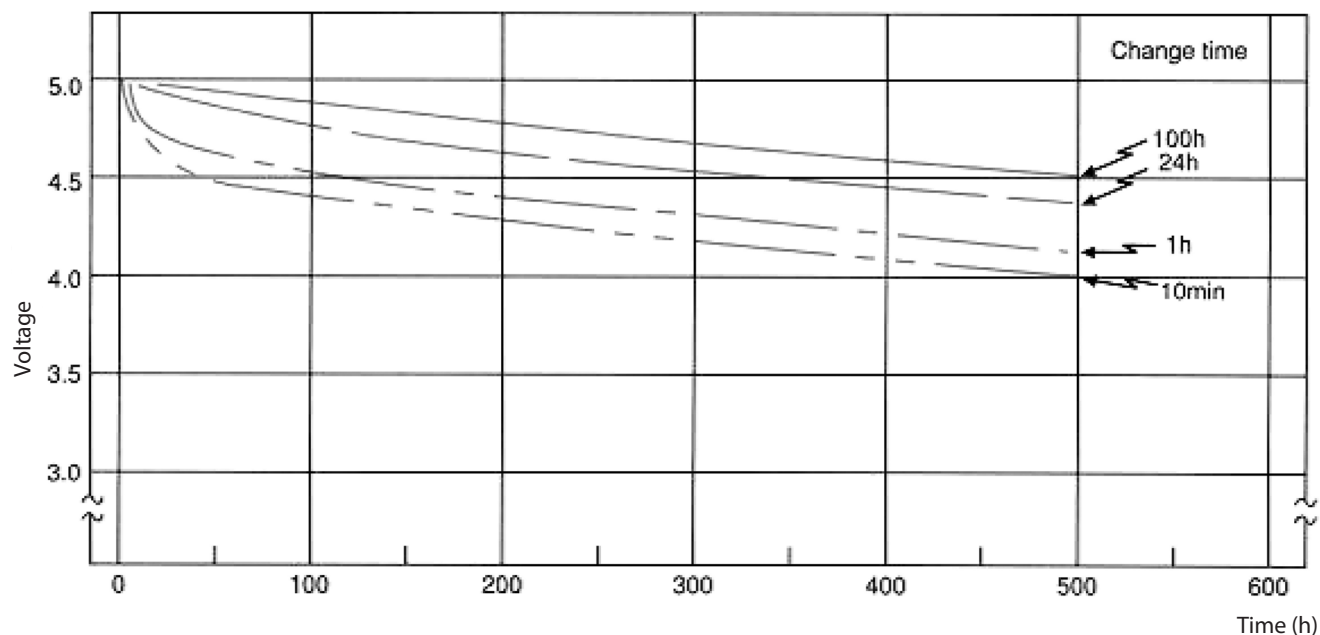

### Charging Characteristics

Part number: EDLF105B5R5C (5.5 V 1.0 F) @ +20 °C

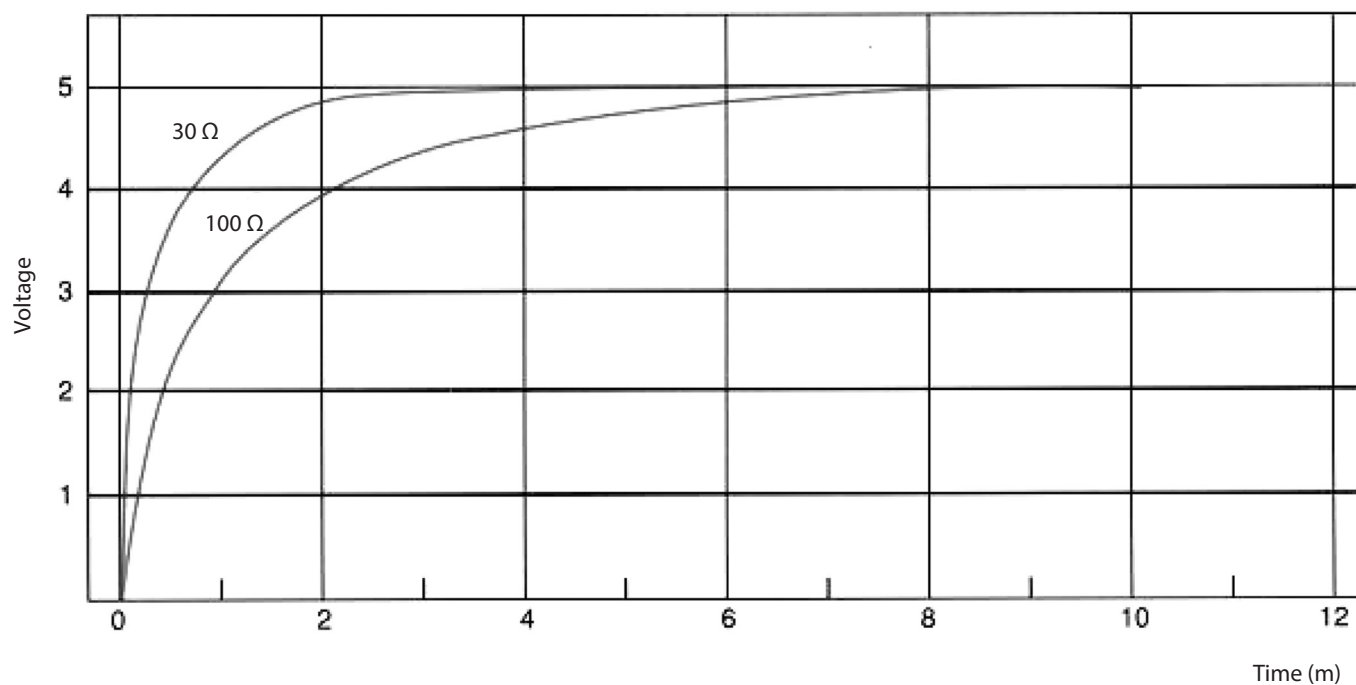



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.