

10119189 - X0C - XXXLF

6-COLUMN
DIFFERENTIAL
SIGNAL

LEAD-FREE DESIGNATION
ONLY WITH APPLICABLE
PLATING CODES

LETTER	PERFORMANCE-BASED PLATING (SEE NOTE 2)	
	TARGET APPLICATION	LEAD-FREE (LF)
B	TELCORDIA CO	NO
C	TELCORDIA UE	NO
D	TELCORDIA CO	YES
E	TELCORDIA UE	YES


NUMBER	GUIDE PIN STYLE, HEIGHT	
0	STANDARD GUIDE PIN MACHINED, 31.6mm	
4	STANDARD GUIDE PIN MACHINED, 25.7mm	

NUMBER	CONTACT MATING WIPE LENGTH		COMPLIANT PIN DRILL SIZE
	SIGNAL	GROUND	
1	2	4	Ø0.55 [0.0217"]
2	3	4	Ø0.55 [0.0217"]
3	2	4	Ø0.45 [0.0177"]
4	3	4	Ø0.45 [0.0177"]
5	2	3	Ø0.55 [0.0217"]
6	3	3	Ø0.55 [0.0217"]
7	2	3	Ø0.45 [0.0177"]
8	3	3	Ø0.45 [0.0177"]

TABLE 1: OPTIONAL PCB HOLE SIZE (SEE NOTE 11)		
	GROUNDED	UNGROUNDED
FINISHED	Ø2.35-2.55	Ø2.35-2.55
PAD	Ø5.50	N/A
PLATED	YES	NO
DRILL (mm/in)	2.58/.1015	2.44/.096

TABLE 2: OPTIONAL SCREW TYPE (SEE NOTE 10)		
SCREW P/N	DESCRIPTION	BOARD THICKNESS
10091790-002LF	#2.56 X .375" PHILIPS PANHEAD W/SQ CONICAL WASHER	1.60 - 5.00
10091790-003LF	#2.56 X .500" PHILIPS PANHEAD W/SQ CONICAL WASHER	5.00 - 10.00

MODULE DESCRIPTION	LETTER DESIGNATION REPRESENTED IN DASH NUMBER										BASE MODULE
LEFT POLARIZING GUIDANCE MODULE (SEE SHEET 3)	J	A	B	C	D	E	F	G	H		
RIGHT POLARIZING GUIDANCE MODULE (SEE SHEET 4)	Y	P	Q	R	S	T	U	V	W		
OPEN MODULE (TWO WALL) (SEE SHEET 2)	0 (ZERO)										
LEFT WALL MODULE (SEE SHEET 5)	L										
RIGHT WALL MODULE (SEE SHEET 6)	M										
FOUR WALL MODULE (SEE SHEET 7)	I (ONE)										

spec ref		-		dr	Roger Ng	2011/11/22	projection		MM		size	A2	scale	4:1
tolerance std		-		eng	Sandar Soe	2014/10/02					ecn no	ELX-S-18843-1		
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-					rel level			
				appr	Chen-Hong Tan	2014/12/10	product family			XCEDE		Released		
surface		linear	0.X	±0.2		title	MODULE ASSEMBLY			dwg no	10119189		rev	B
			0.XX	±0.10										
			0.XXX	±0.050										
ASME Y14.5		angular	0°	±2°	www.fci.com	cat. no.	-	Product- Customer Drw			sheet 1 of 8			

PDS: Rev :B



STATUS:Released

Printed: Dec 10, 2014




spec ref -		dr Roger Ng		2011/11/22		projection		MM		size A2		scale 4:1	
tolerance std -		eng Sander Soe		2014/01/02						ecn no		ELX-S-18843-1	
ASME Y14.5		chr -		-									
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr Chen-Hong Tan		2014/12/10		product family		XCEDE		rel level		Released	
surface ✓		linear		0.X ±0.2				title MODULE ASSEMBLY VERTICAL HEADER, 6 COLUMN, 3 PAIR		dwg no 10119189		rev B	
				0.XX ±0.10									
				0.XXX ±0.050									
ASME Y14.5		angular 0°		±2°		www.fci.com		cat. no. -		Product - Customer Drw		sheet 2 of 8	


LEFT POLARIZING/GUIDE MODULE

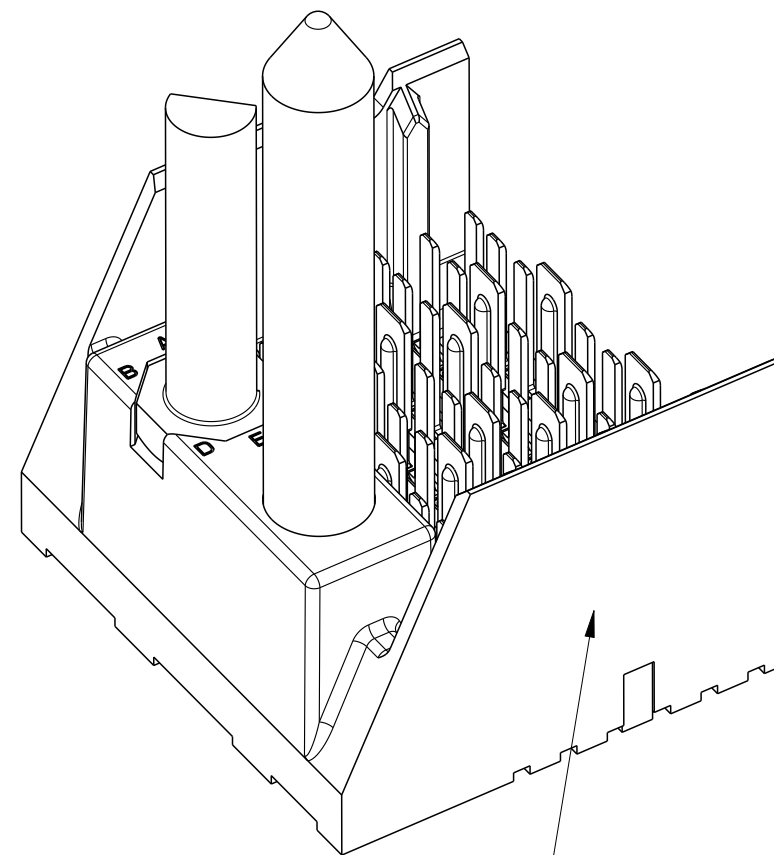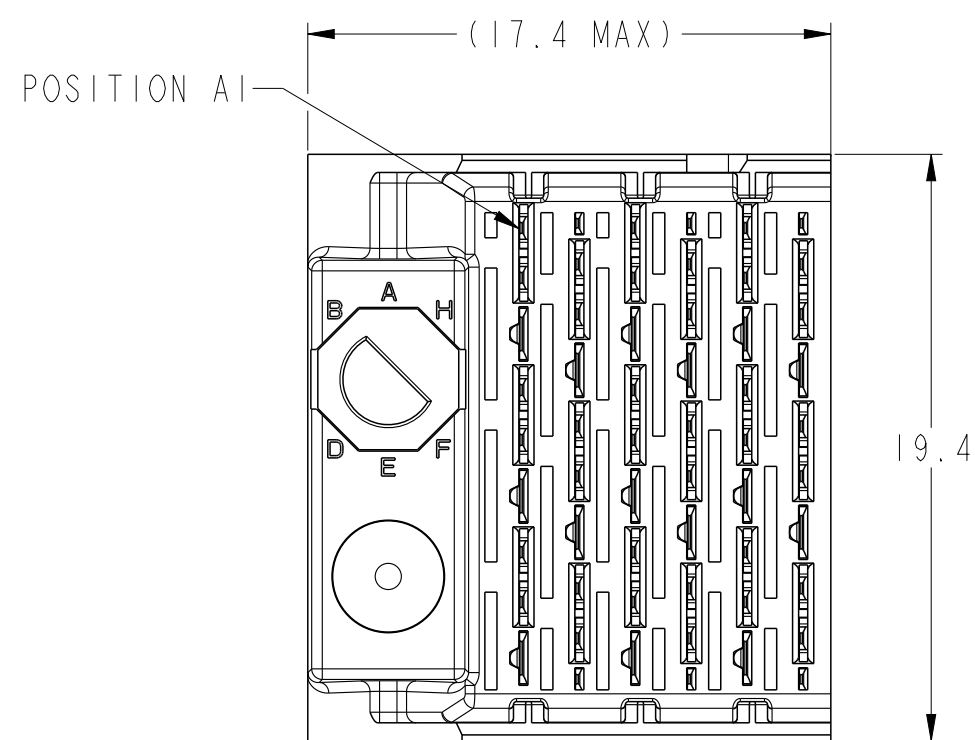


SEE NOTE 5

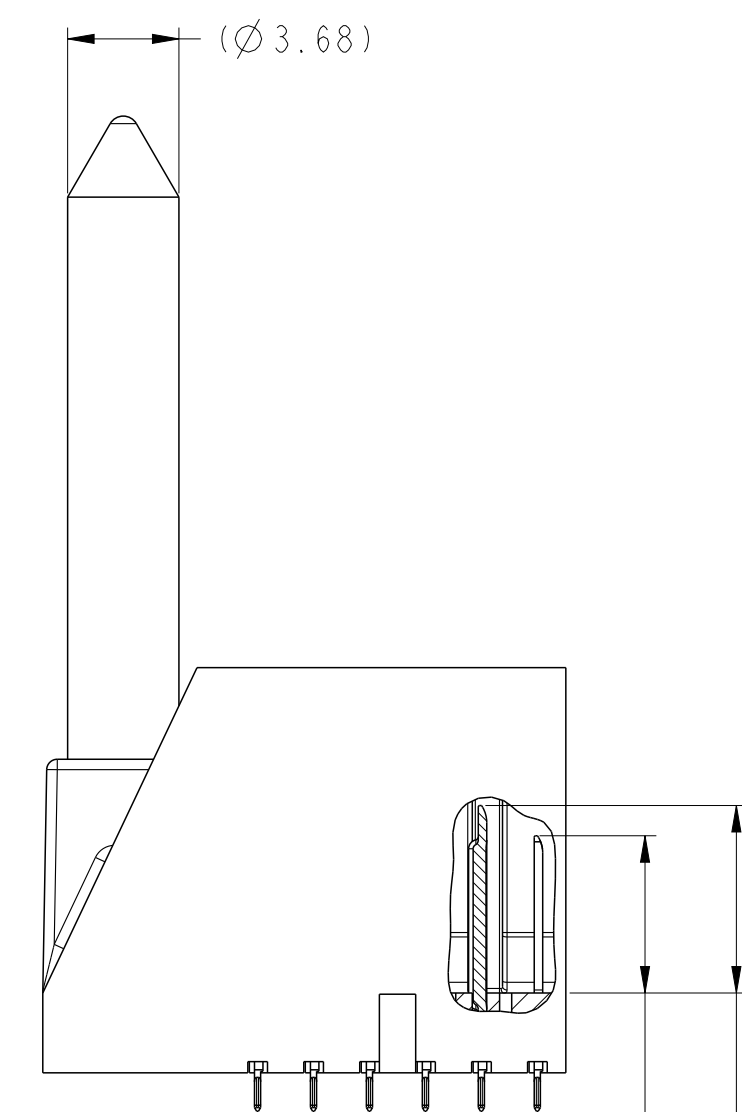


5.2 (3MM SMALL END GROUNDS)
5.2 (3MM WIPE SIGNALS)
4.2 (2MM WIPE SIGNALS)
SEE P/N TREE
6.2 (4MM WIPE WIDE GROUNDS)
5.2 (3MM WIPE WIDE GROUNDS)

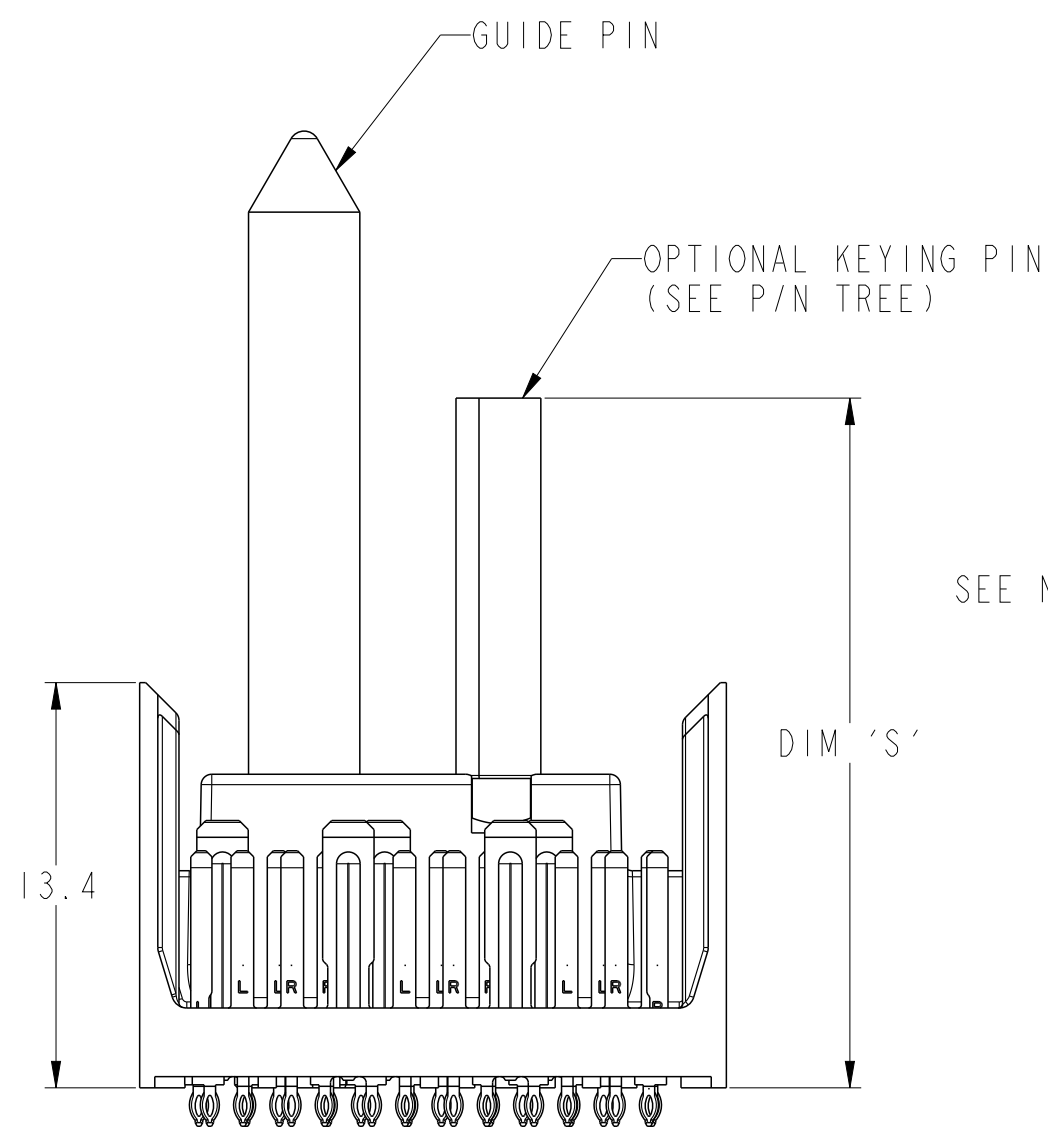

SEE NOTE 8

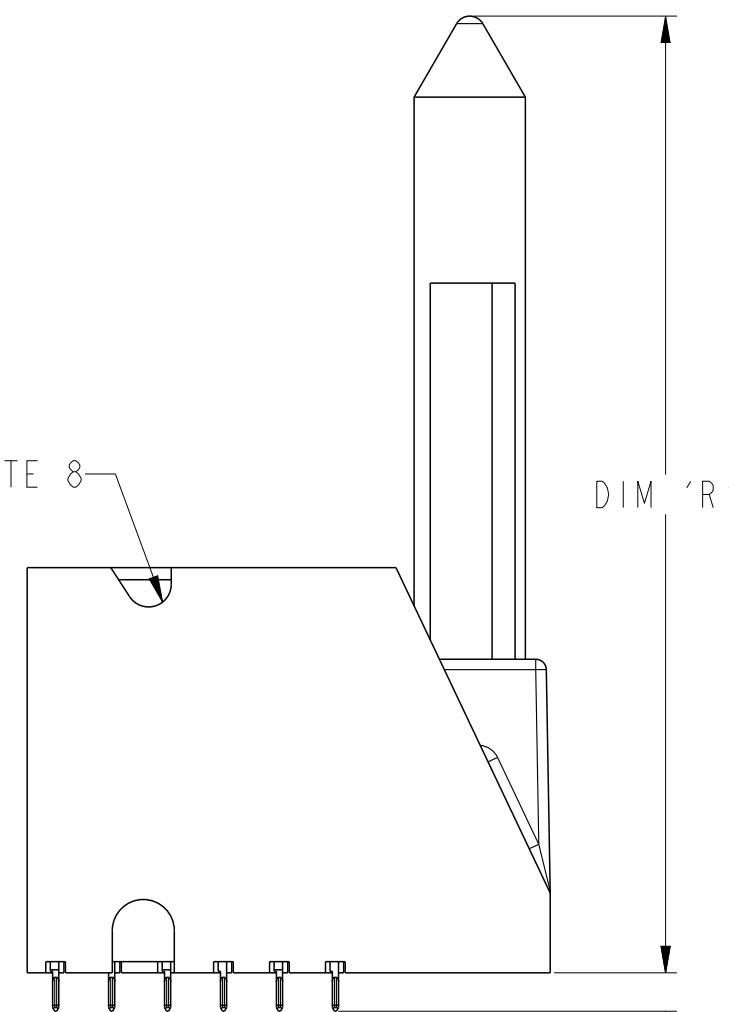

TAIL LENGTH
SEE NOTE 12

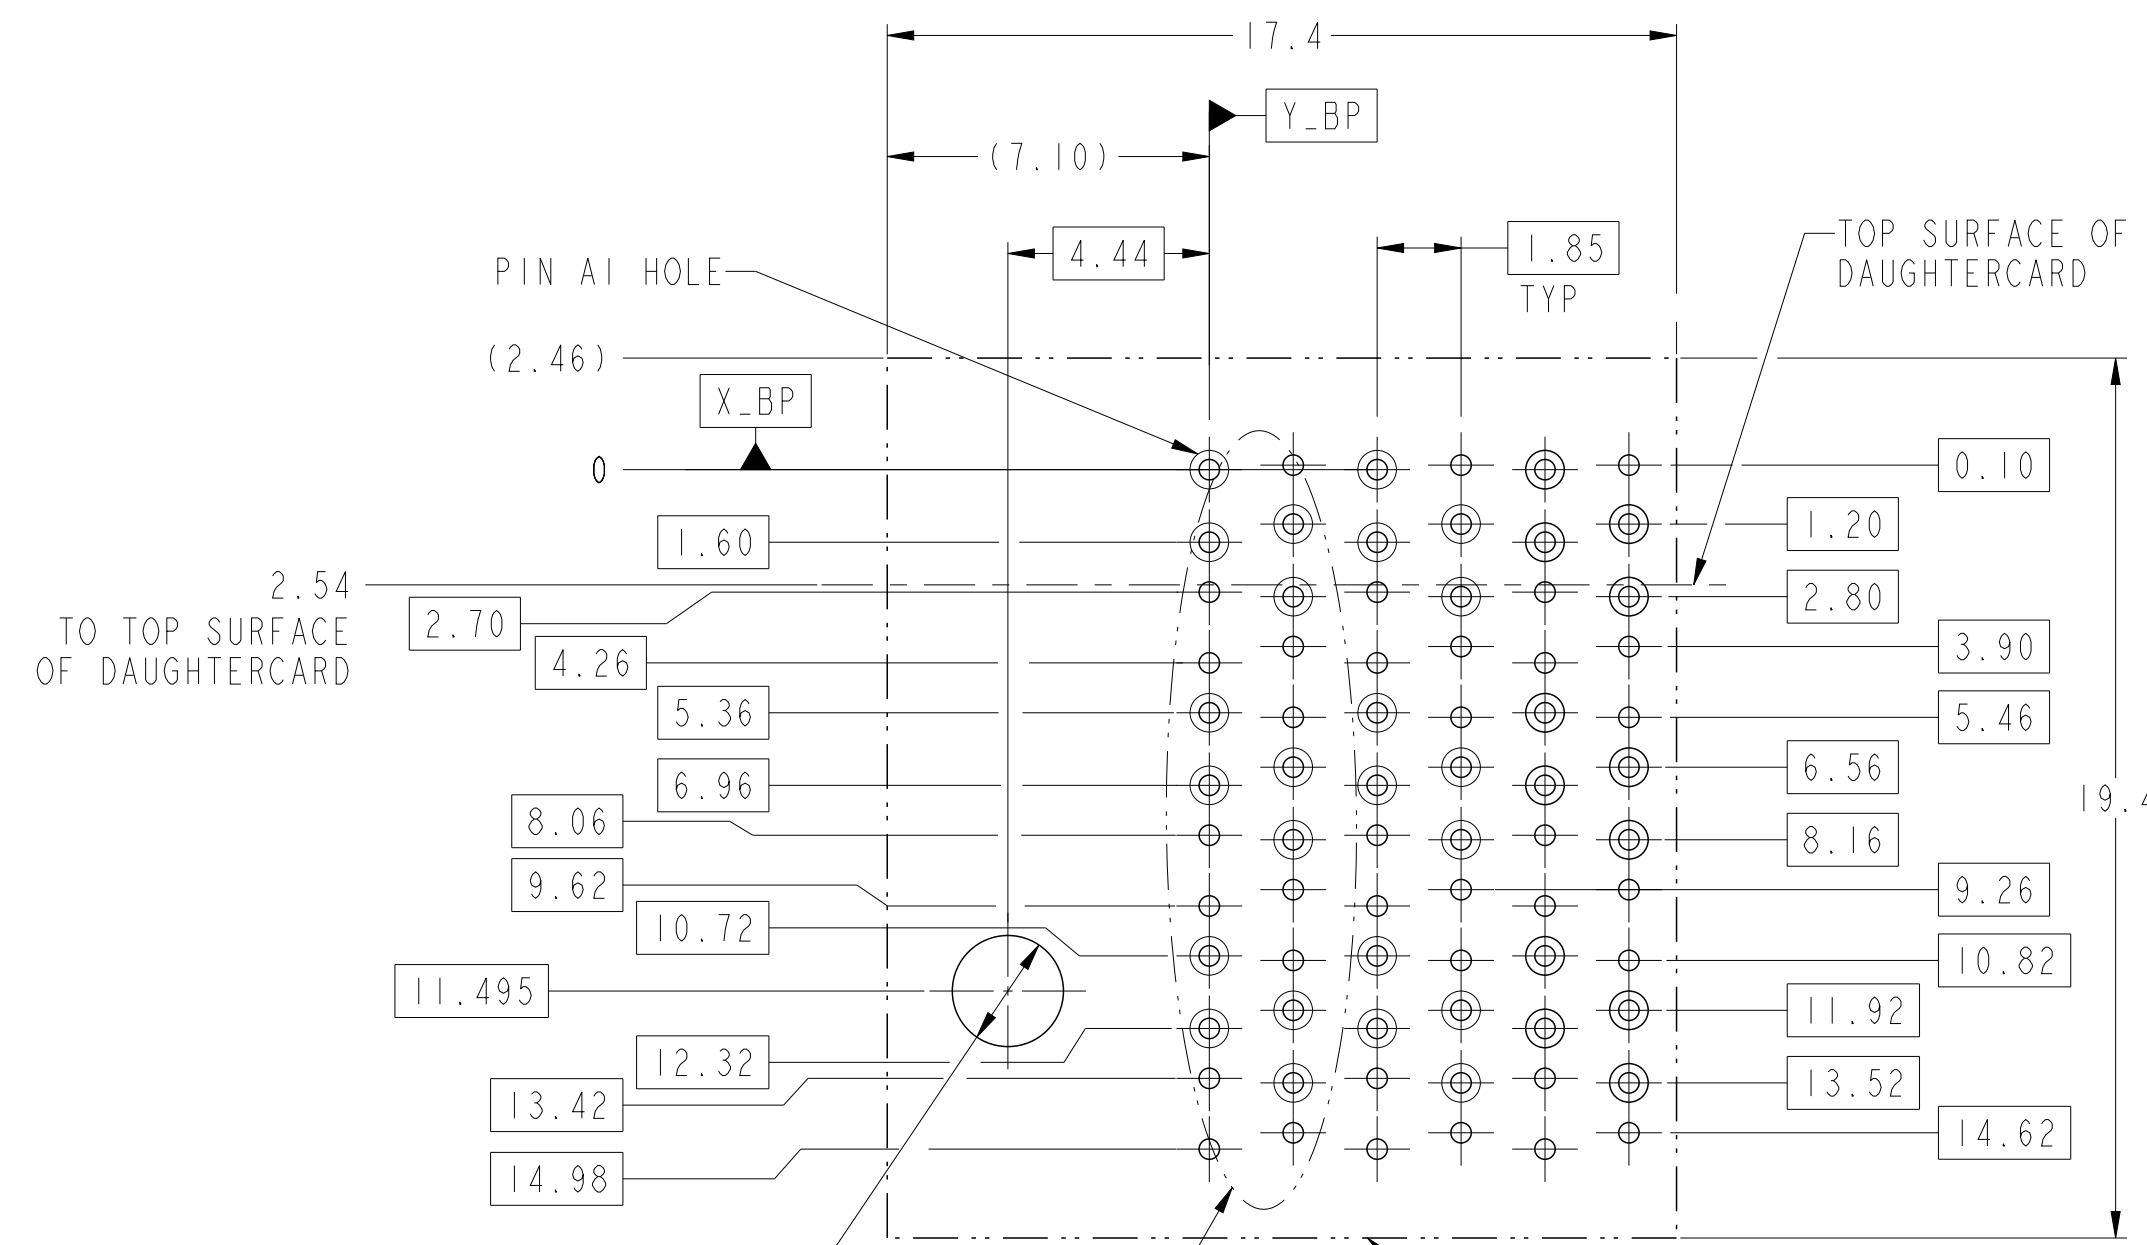

SEE NOTE 11 & TABLE 1

SEE DETAIL A
(SHEET 8)

PCB HOLE PATTERN
COMPONENT SIDE
SCALE 6:1

ASSEMBLY BASE CONFIGURATION END DASH NO.	GUIDE PIN	POLARIZING KEY
	DIM 'R'	DIM 'S'
-X0X	31.6mm	22.8mm
-X4X	25.7mm	20.0mm







spec ref		-		dr		Roger Ng		2011/11/22		projection				size		A2		scale		4:1	
tolerance std		-		eng		Sandar Soe		2014/10/02						ecn no		ELX-S-18843-1		rel level		Released	
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-													
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		appr		Chen-Hong Tan		2014/12/10		product family		XCEDE		rel level		Released					
surface				linear				title		MODULE ASSEMBLY		dwg no		10119189		rev		B			
		0.X		±0.2																	
		0.XX		±0.10																	
ASME Y14.5		angular		0°		±0.050		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 3 of 8					

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014


RIGHT POLARIZING/GUIDE MODULE

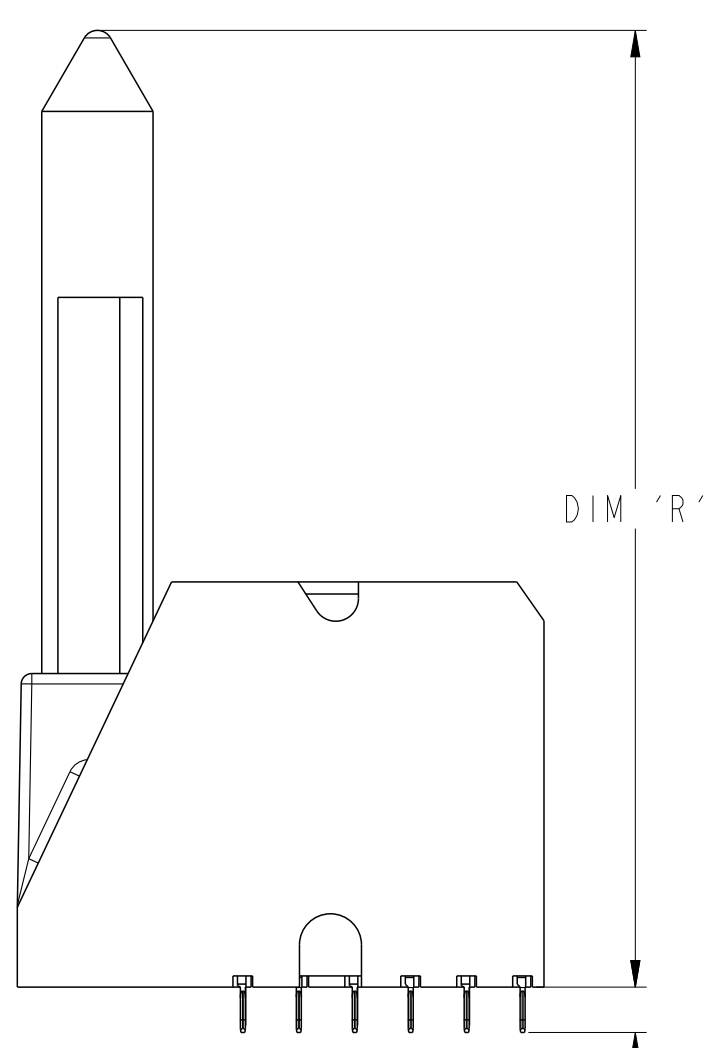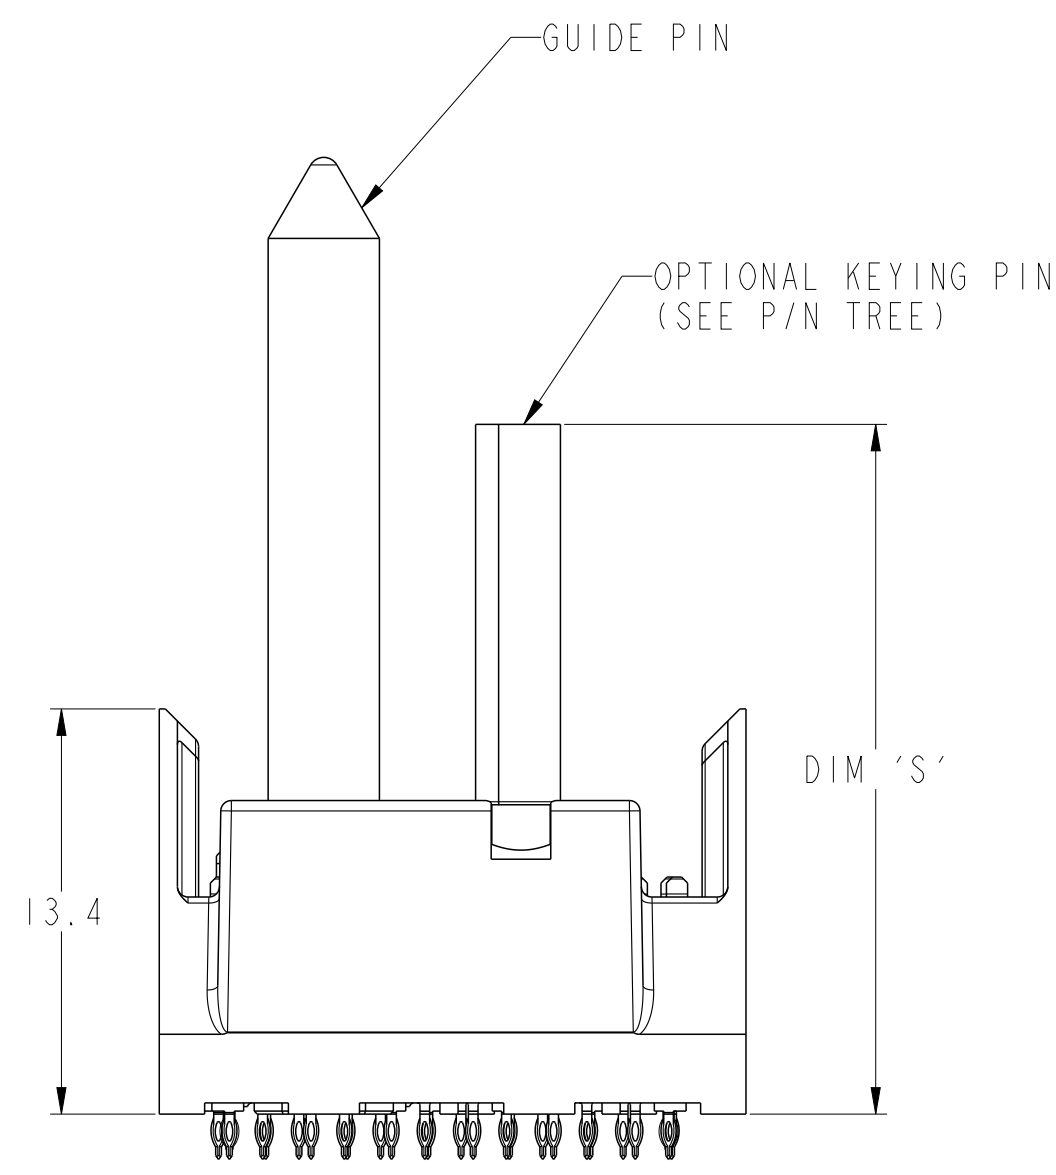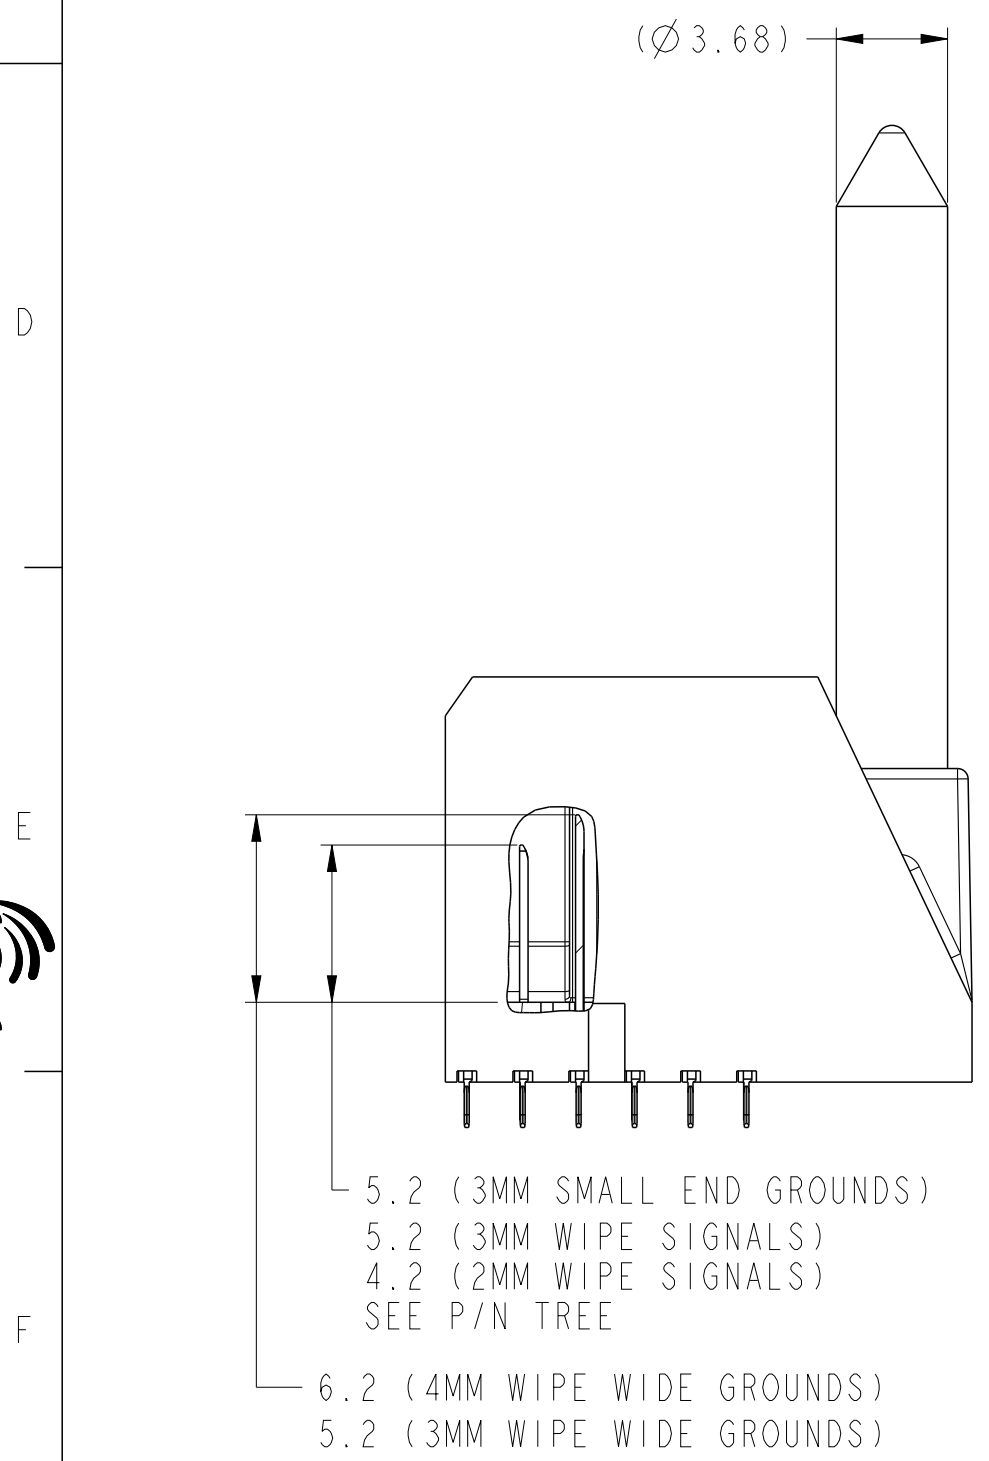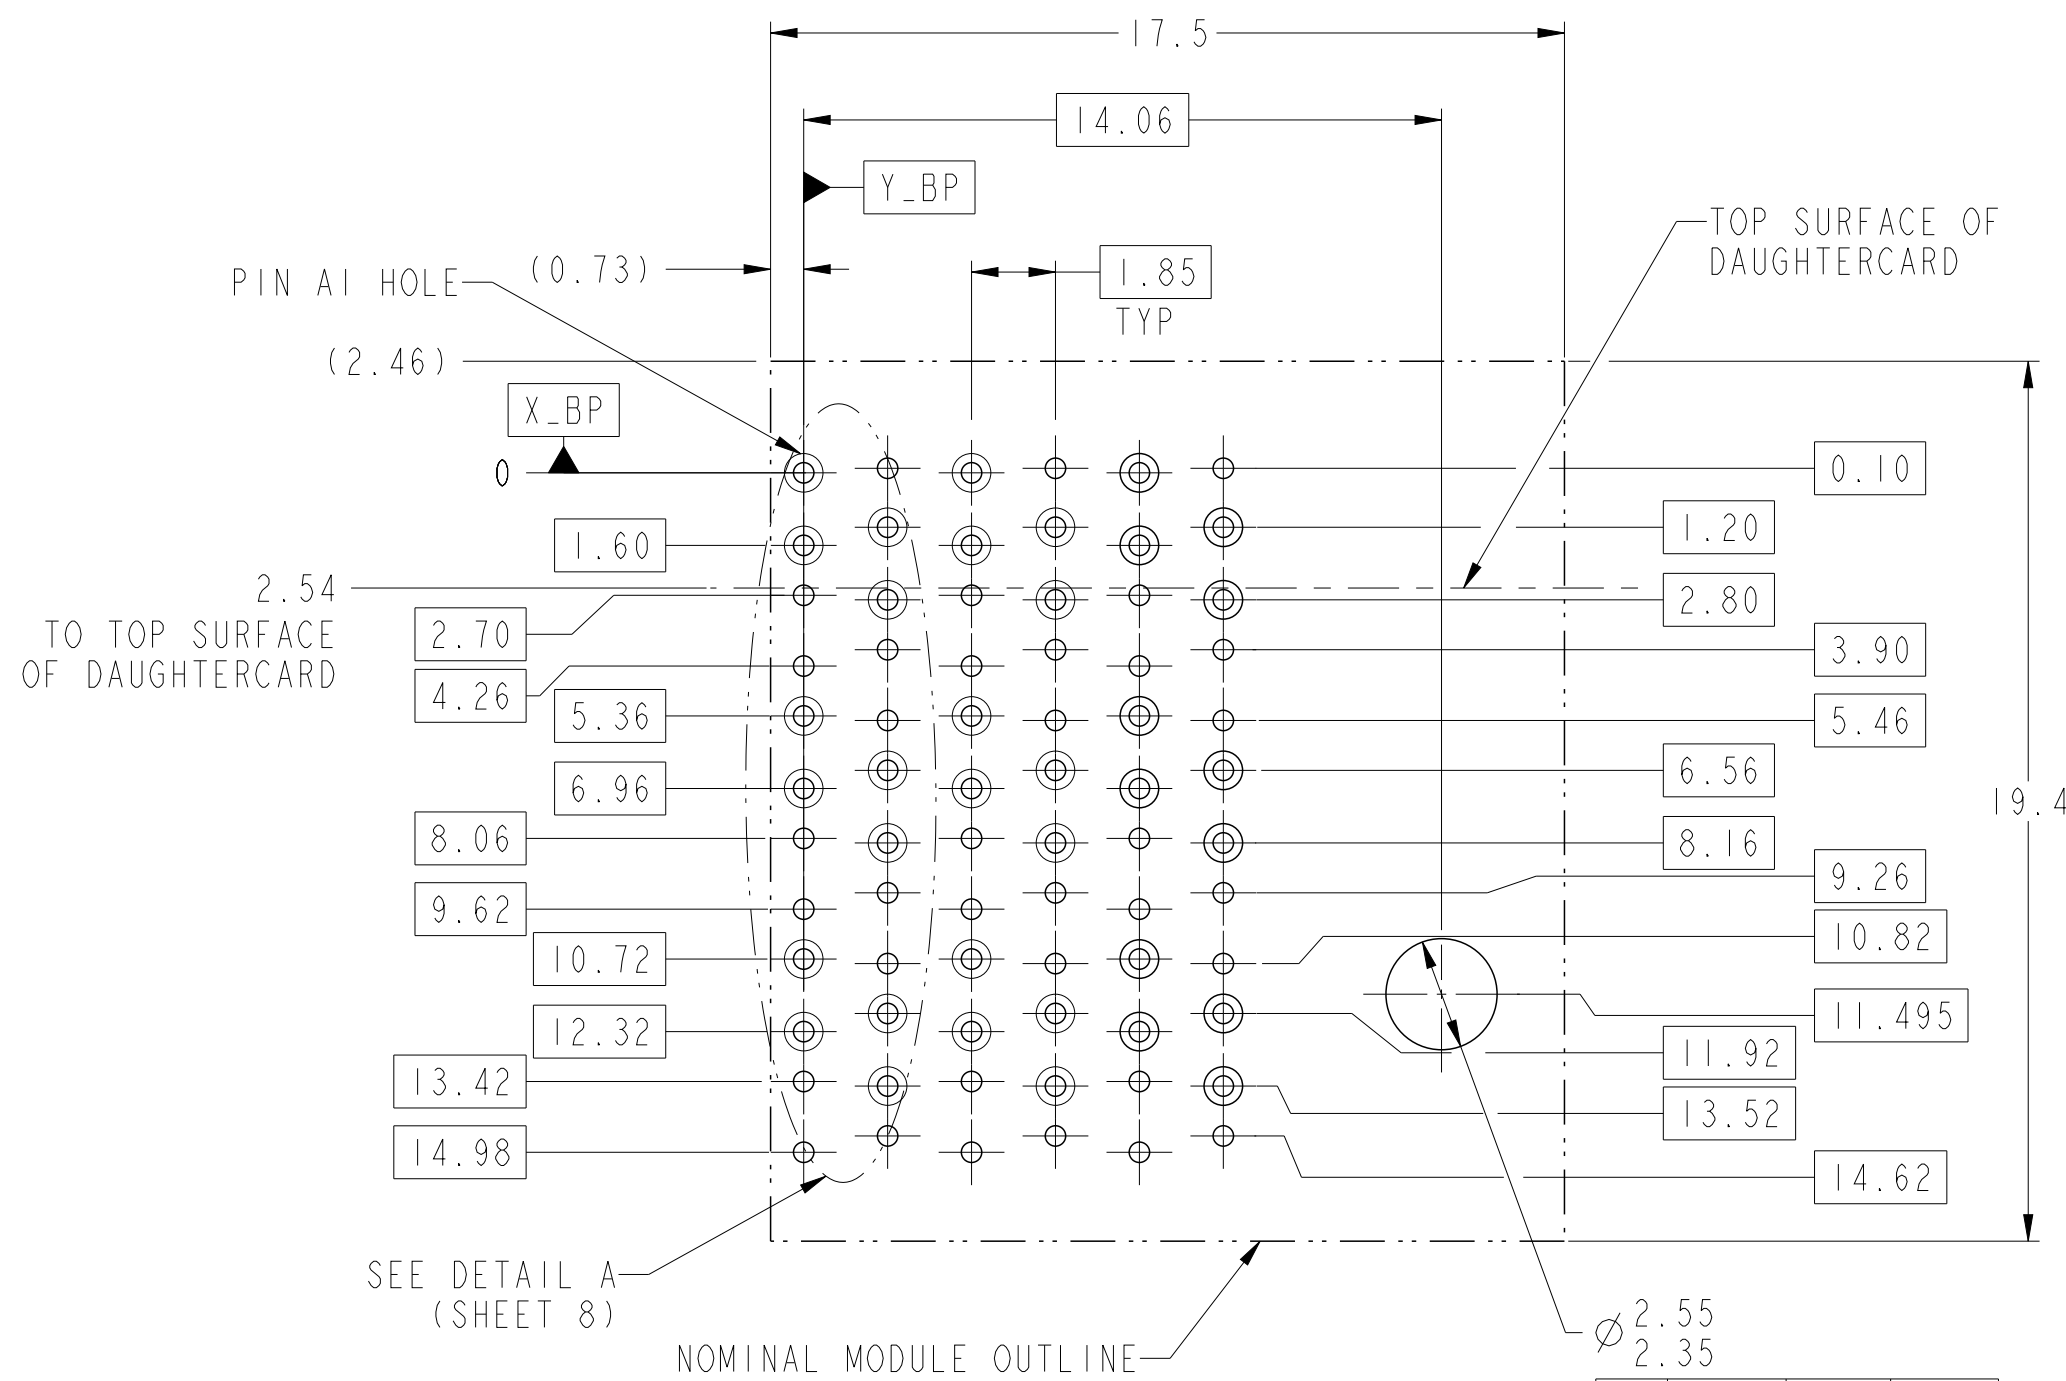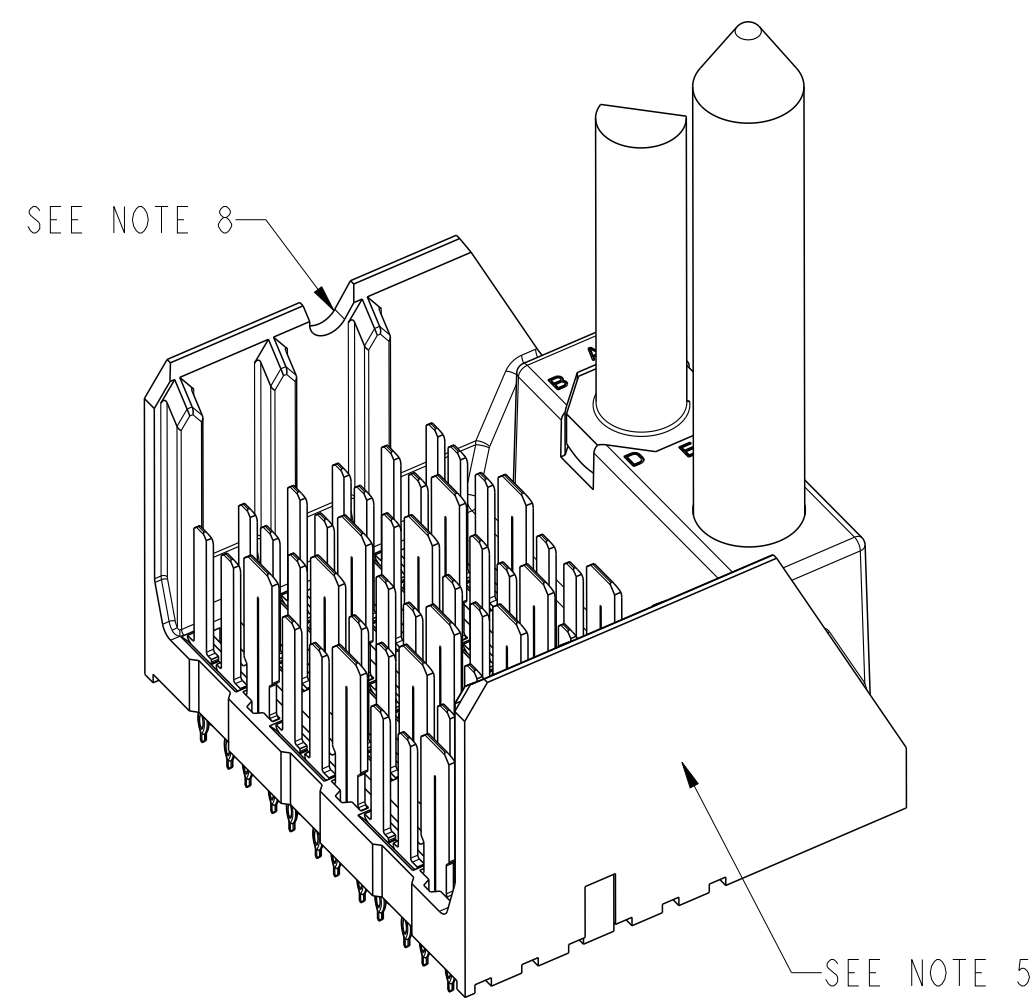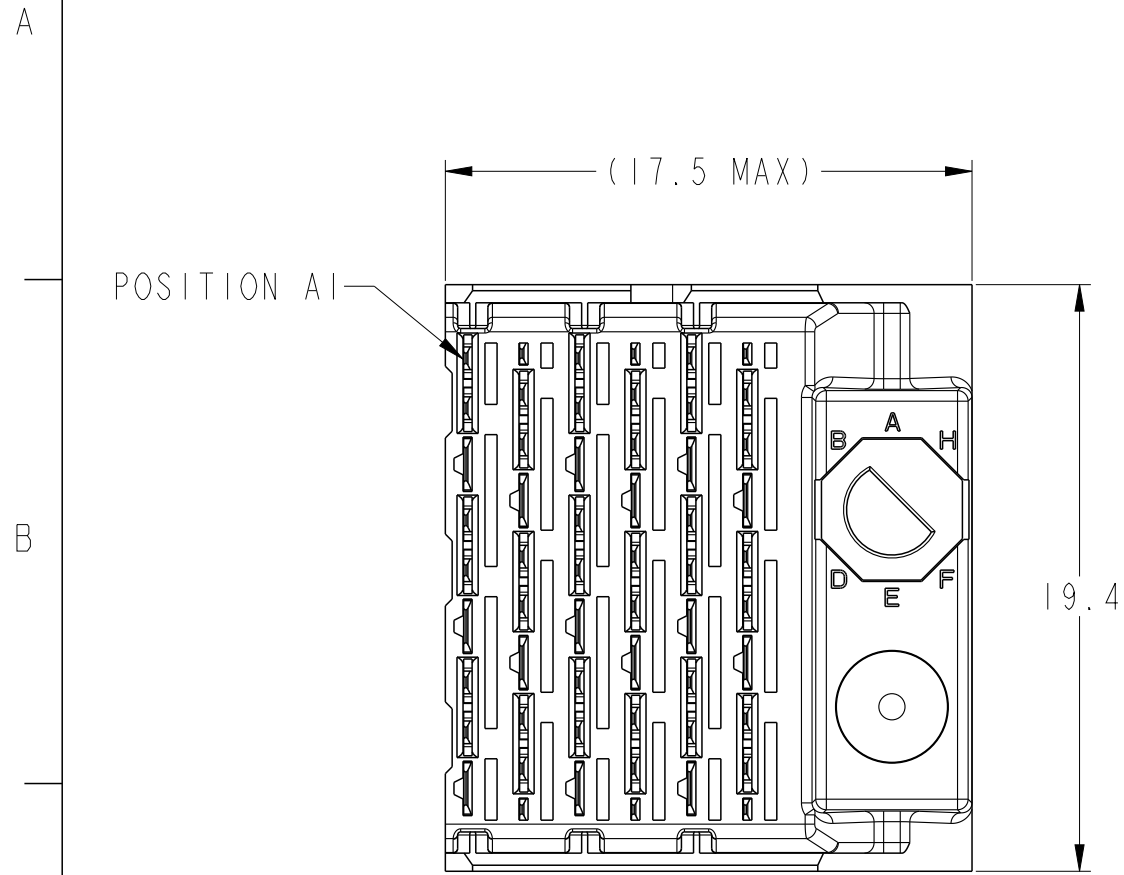



ASSEMBLY BASE CONFIGURATION END DASH NO.	GUIDE PIN	POLARIZING KEY
	DIM 'R'	DIM 'S'
-X0X	31.6mm	22.8mm
-X4X	25.7mm	20.0mm

spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	Sandar Soe	2014/10/02	chr	-	ecn no	ELX-S-18843-1	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Chen-Hong Tan	2014/12/10	product family	XCED	rel level	Released	rev	B
surface	linear	0.X	±0.2	0.XX	±0.10	0.XXX	±0.050	angular	0°	±2°
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 4 of 8		




LEFT WALL MODULE

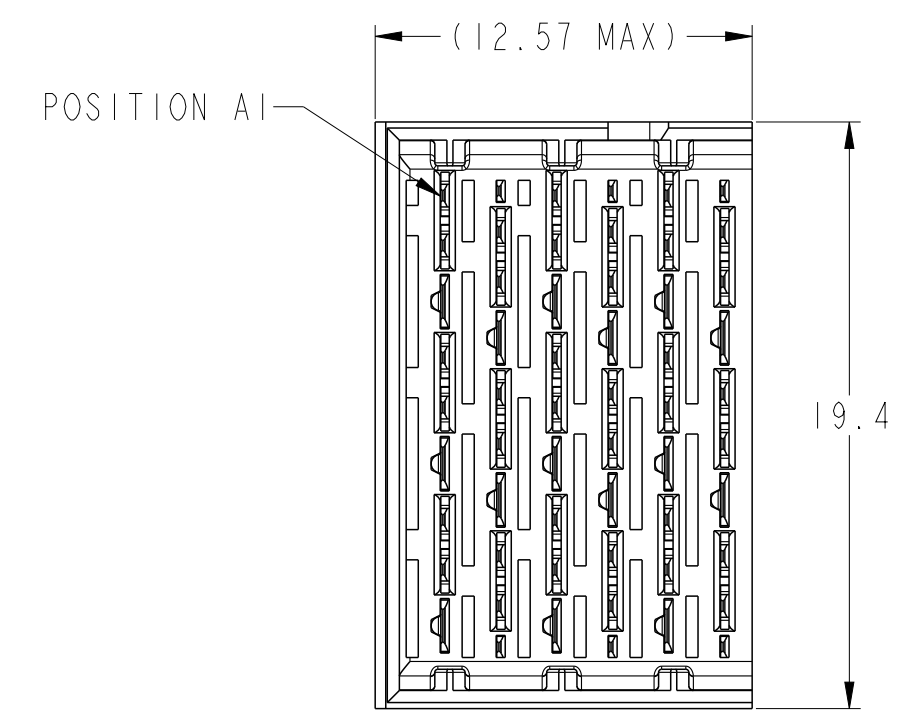

SEE NOTE 8

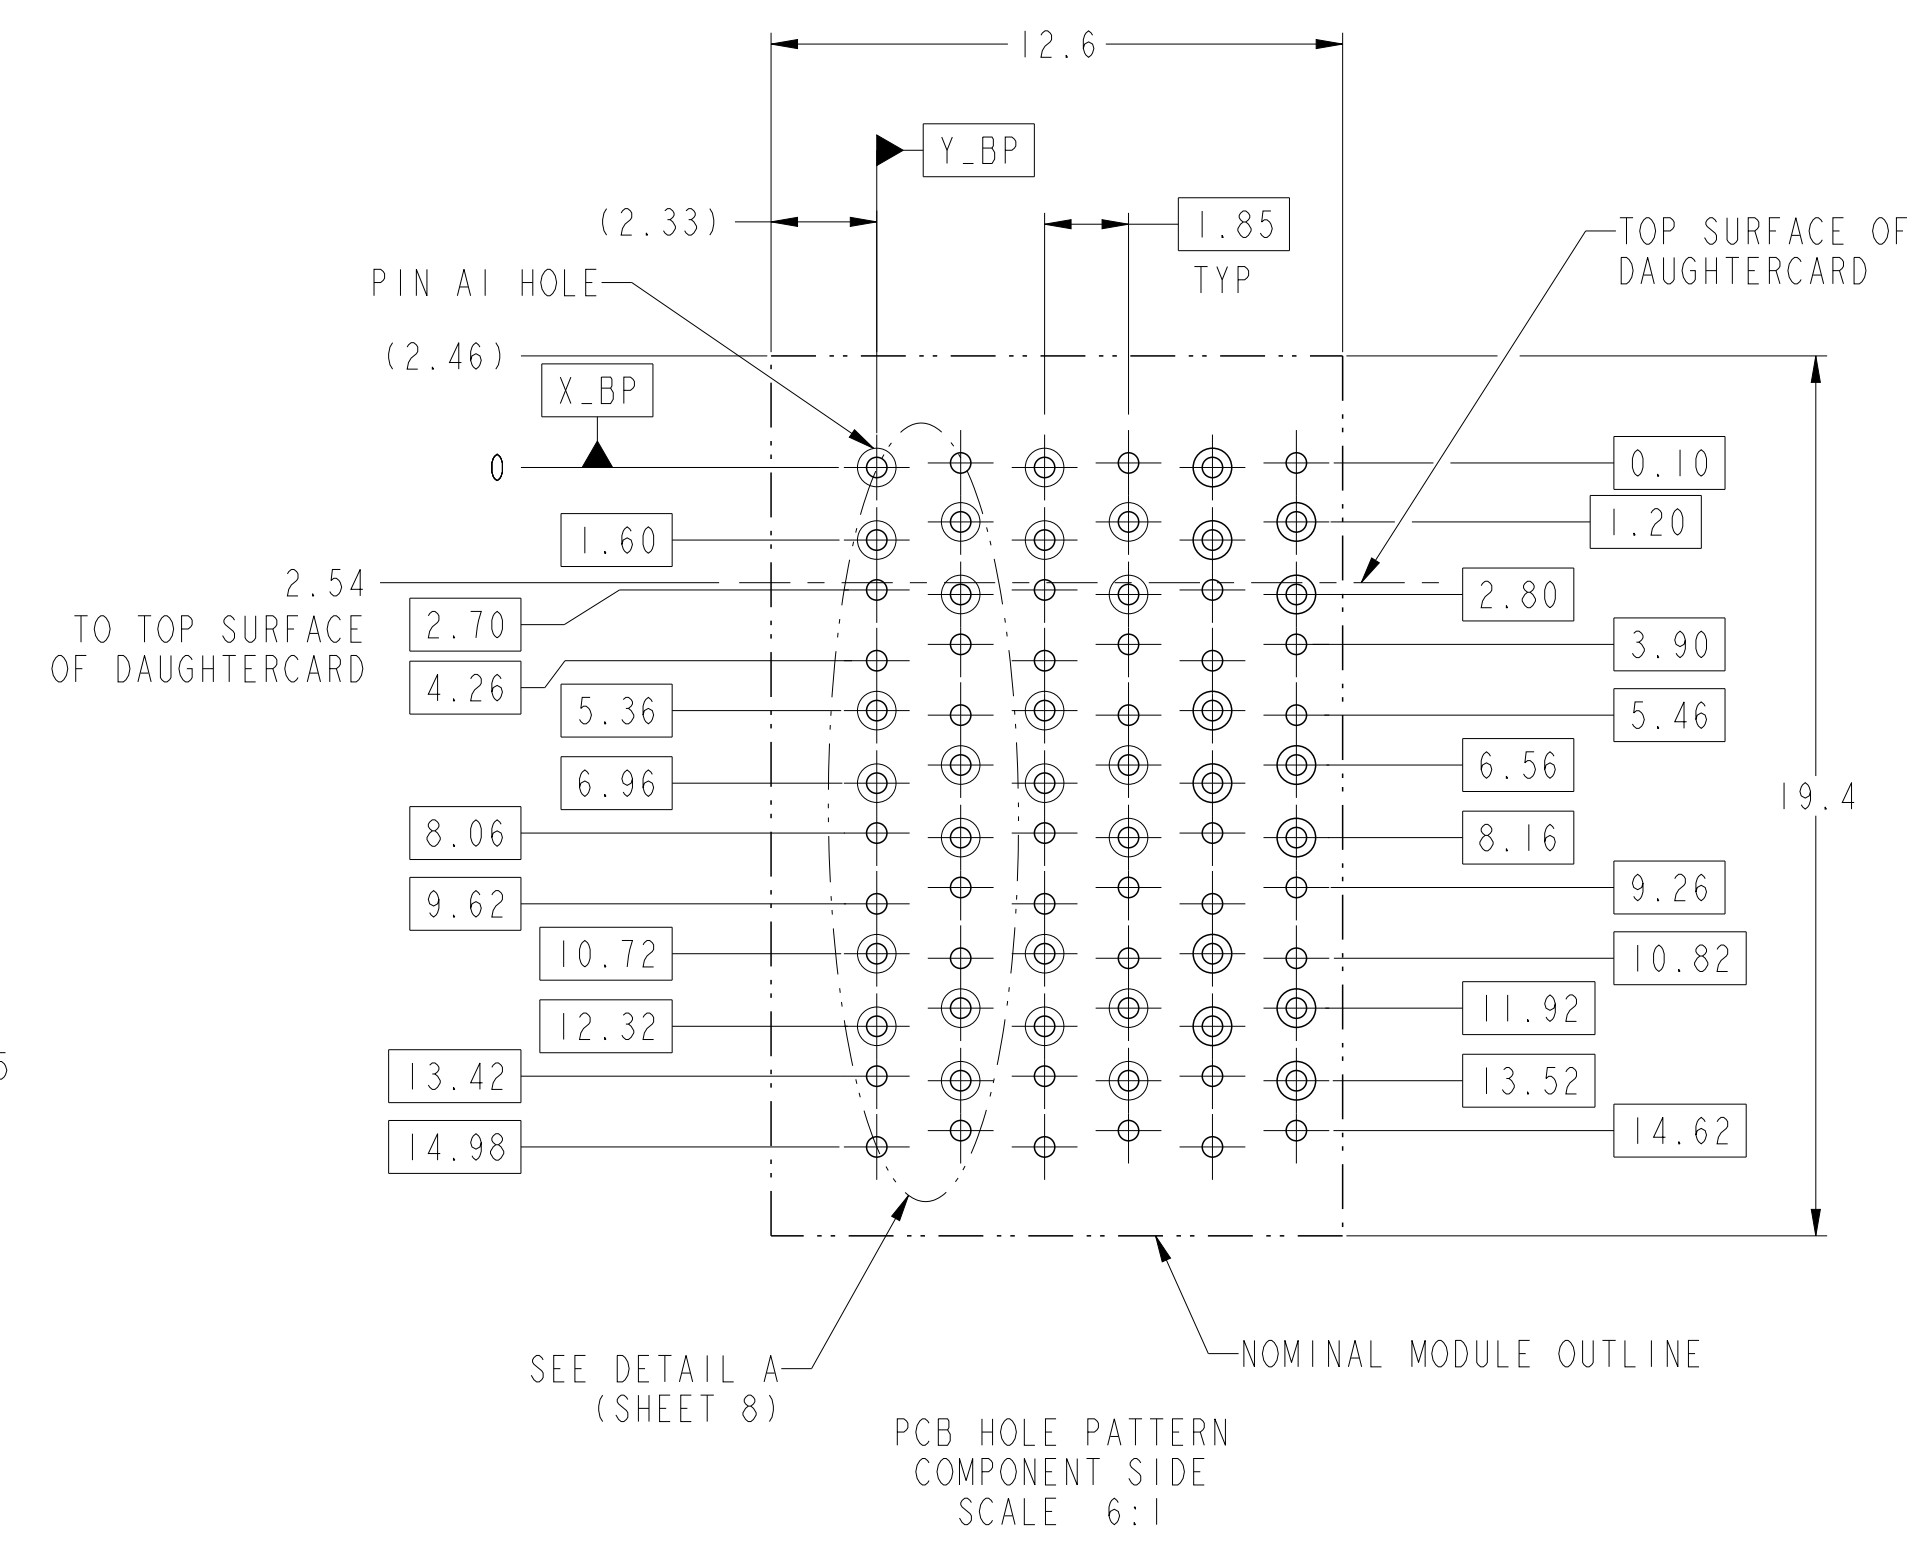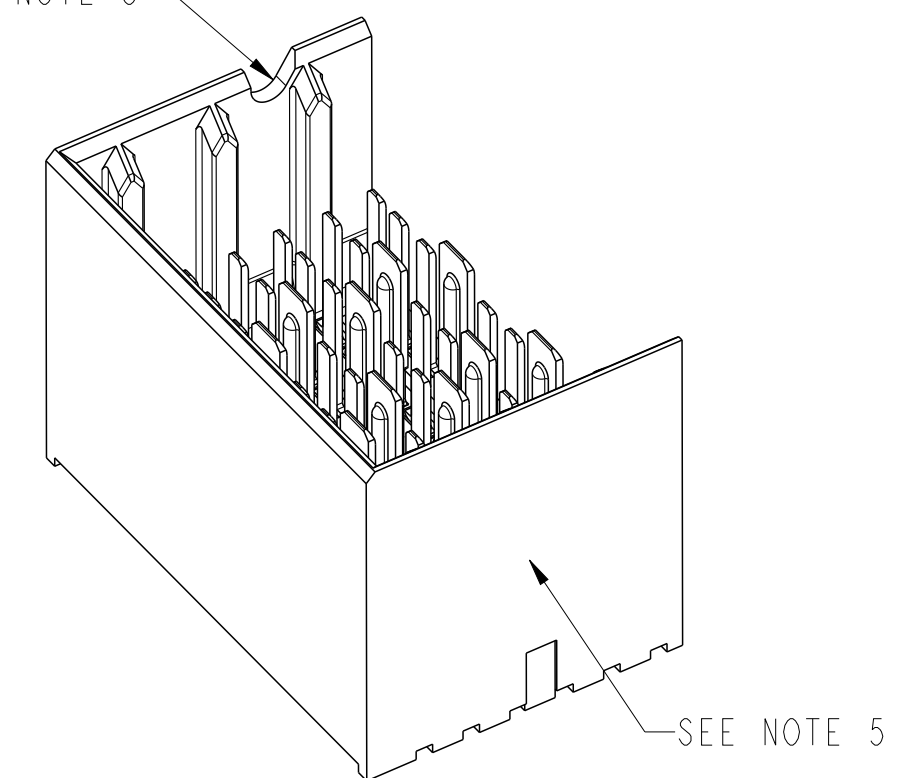

5.2 (3MM SMALL END GROUNDS)
5.2 (3MM WIPE SIGNALS)
4.2 (2MM WIPE SIGNALS)
SEE P/N TREE
6.2 (4MM WIPE WIDE GROUNDS)
5.2 (3MM WIPE WIDE GROUNDS)

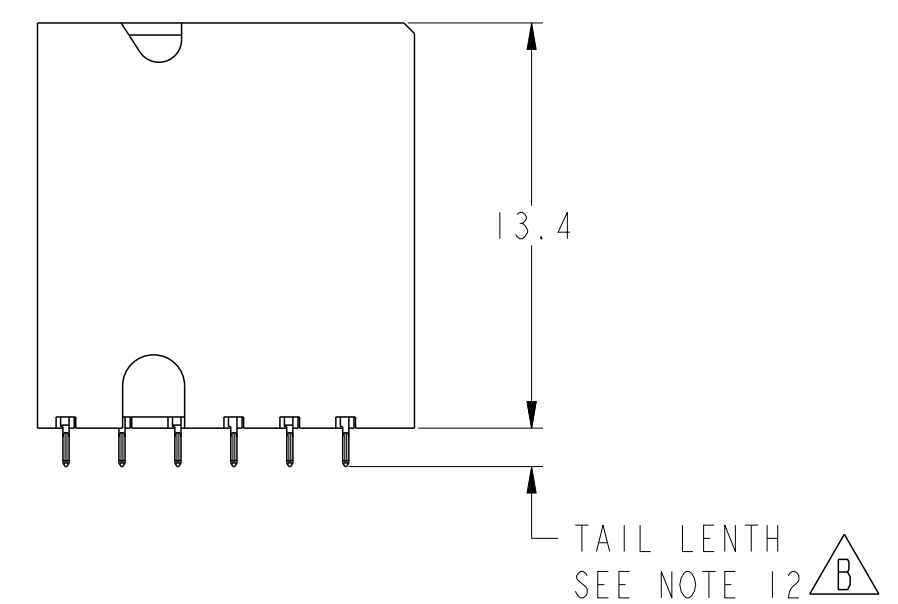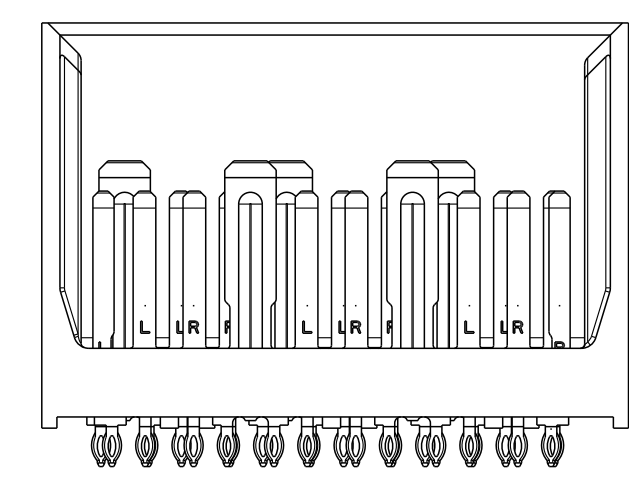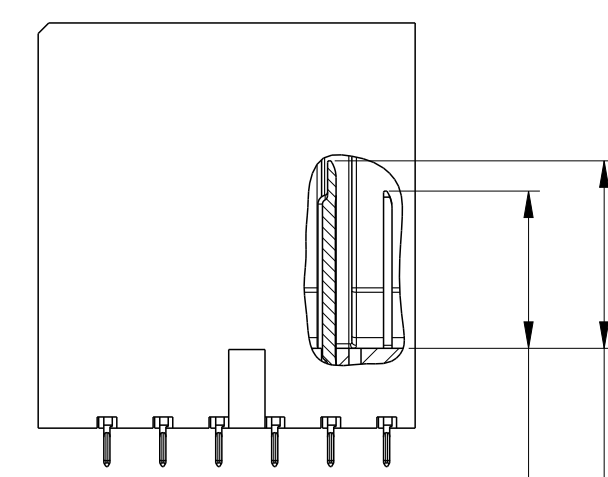





spec ref -				dr Roger Ng		2011/11/22		projection		MM		size	scale		
tolerance std -				eng Sandar Soe		2014/10/02						A2	4:1		
- TOLERANCES UNLESS OTHERWISE SPECIFIED				chr -		-						ecn no	ELX-S-18843-1		
ASME Y14.5				appr Chen-Hong Tan		2014/12/10		product family		XCDE		rel level		Released	
surface	linear	0.X		±0.2			title	MODULE ASSEMBLY				dwg no	10119189		rev
		0.XX		±0.10											
		0.XXX		±0.050											
ASME Y14.5		angular	0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 5 of 8

PDS: Rev :B

STATUS:Released



Printed: Dec 10, 2014

RIGHT WALL MODULE

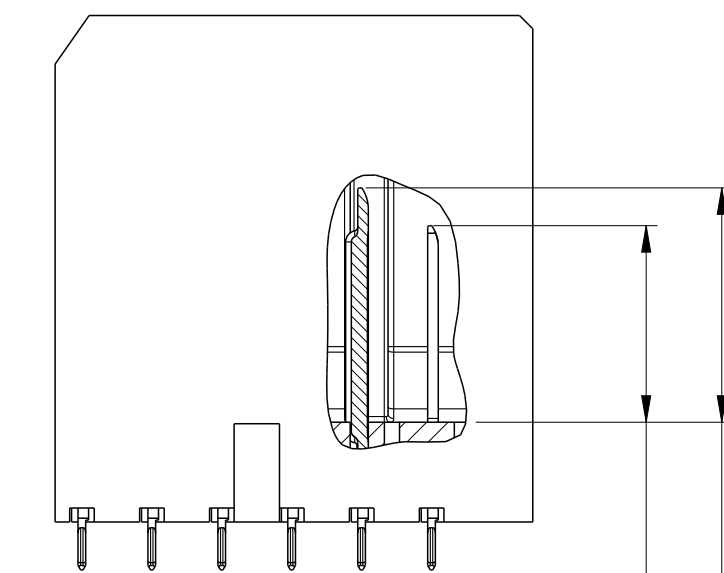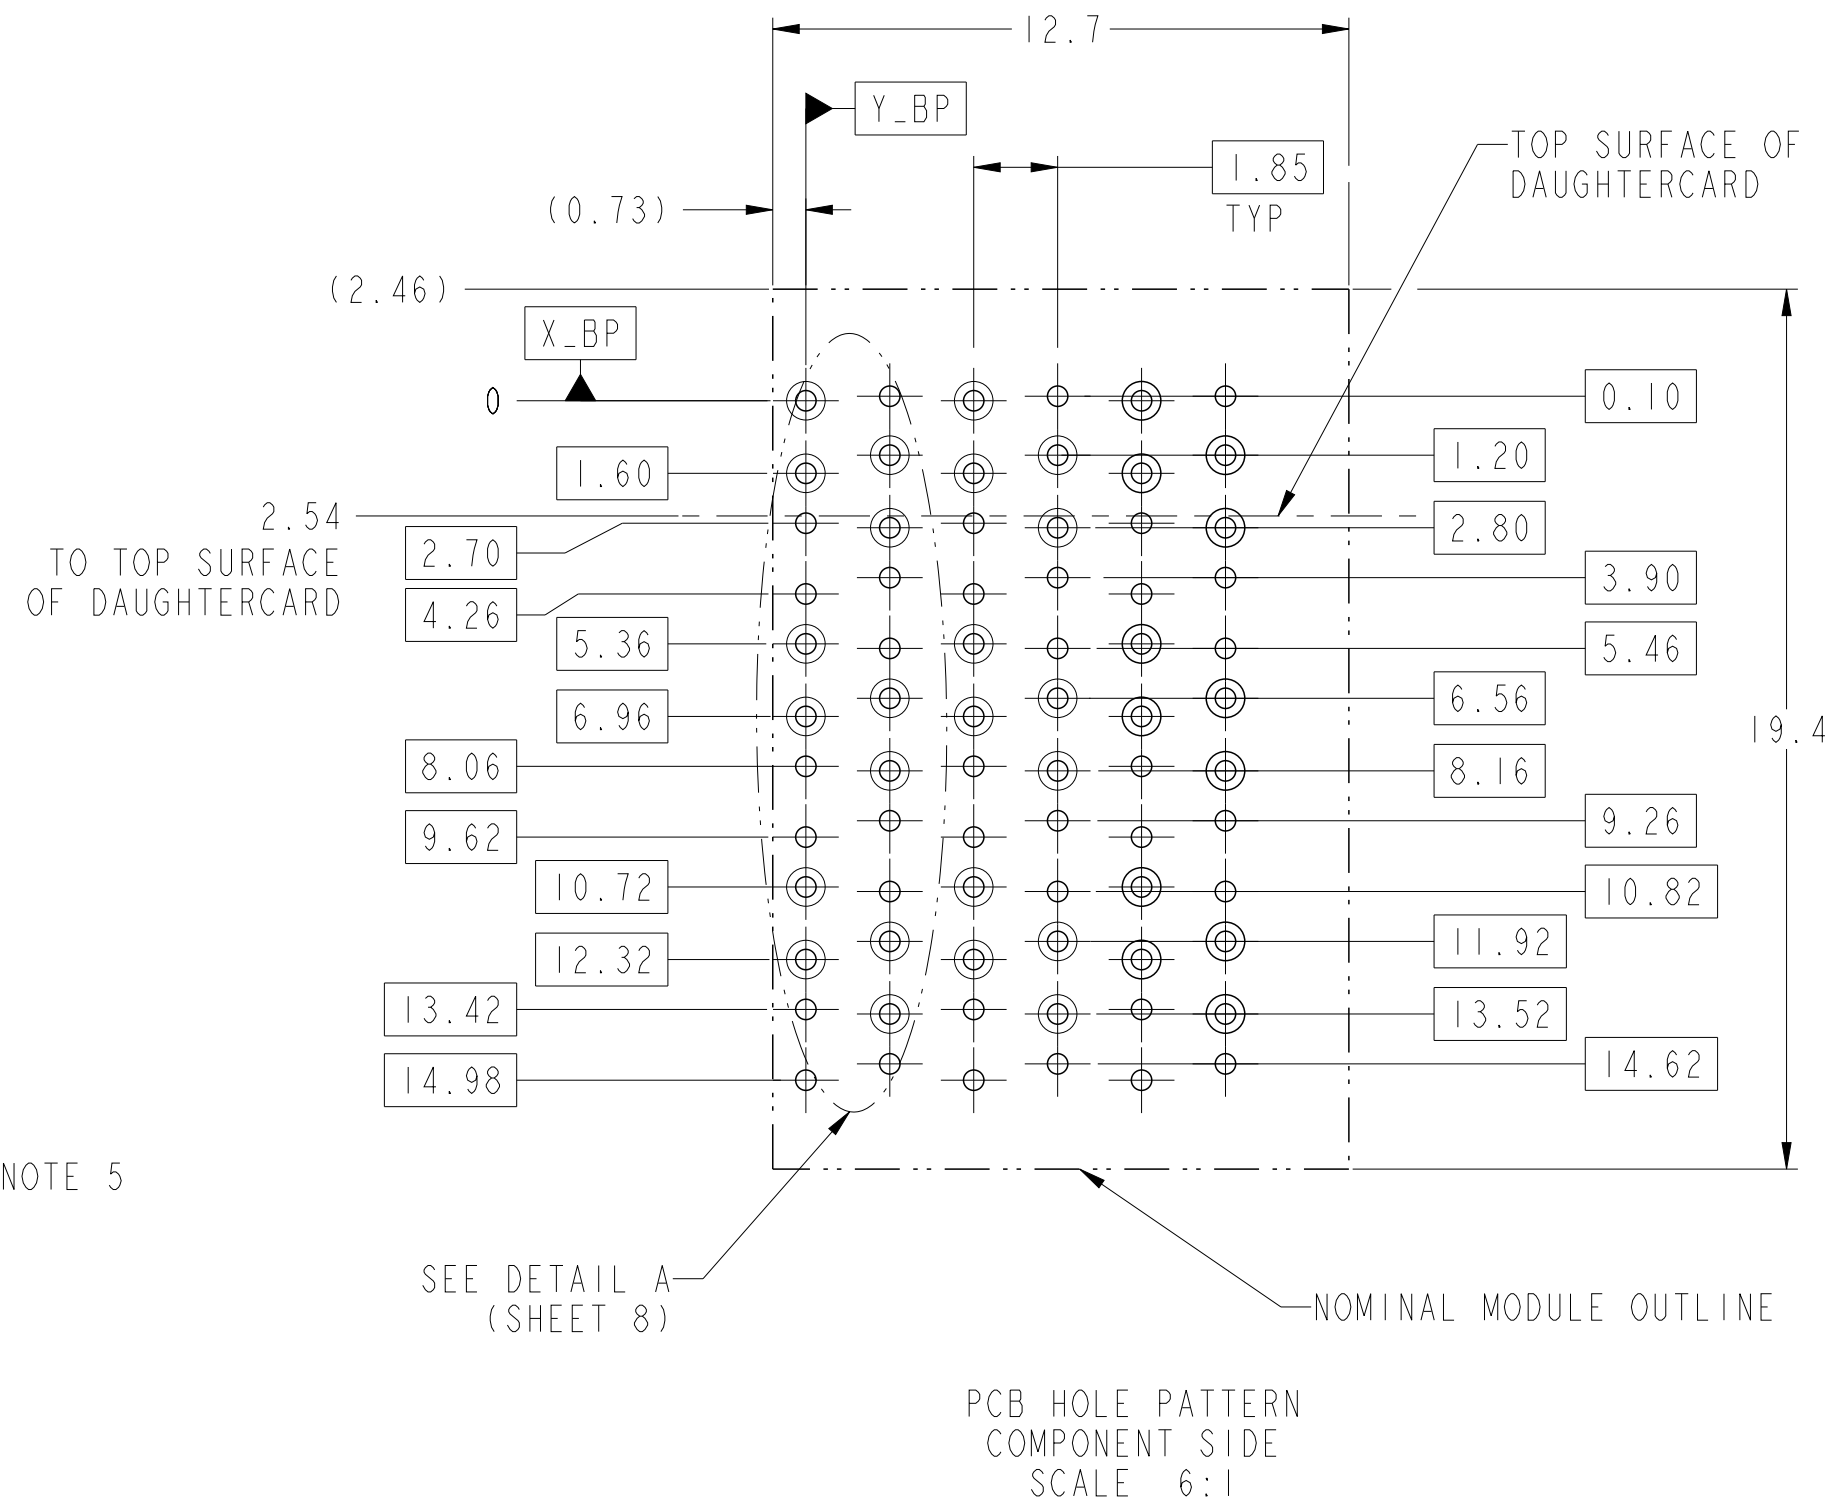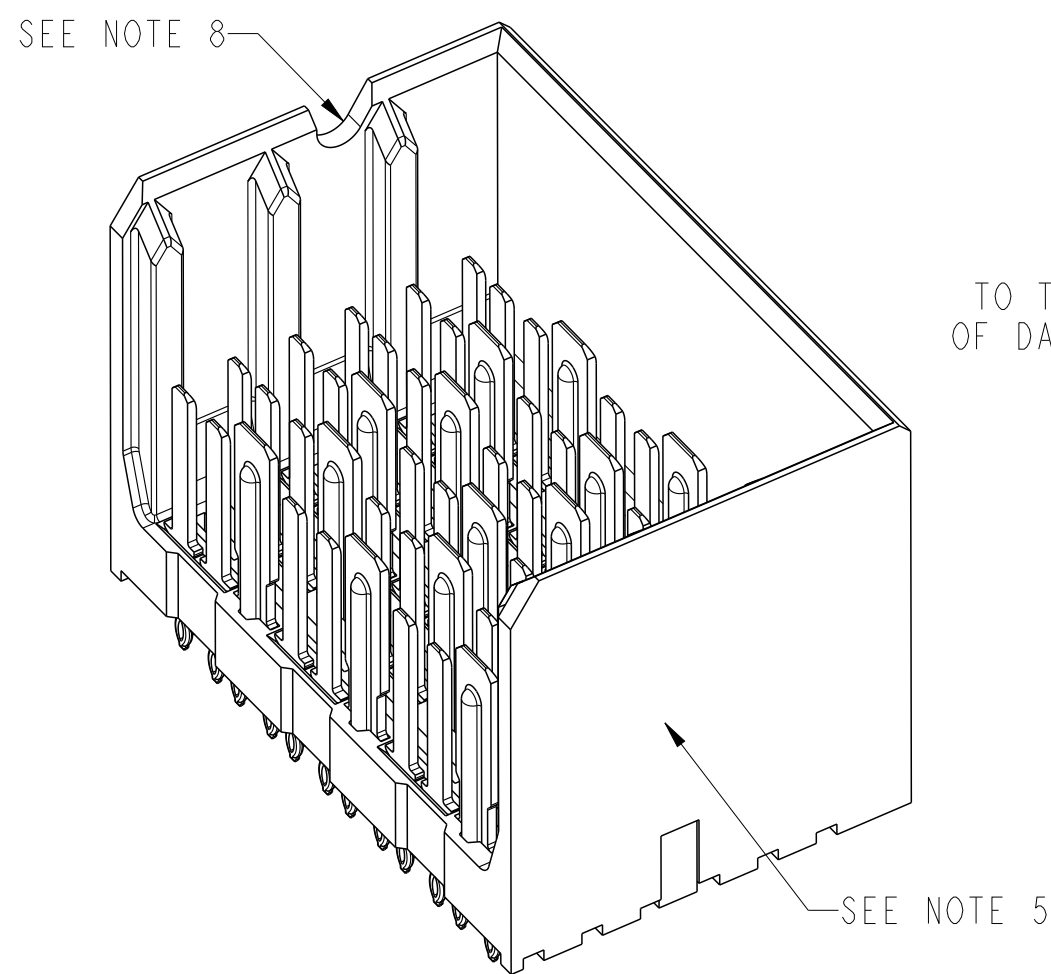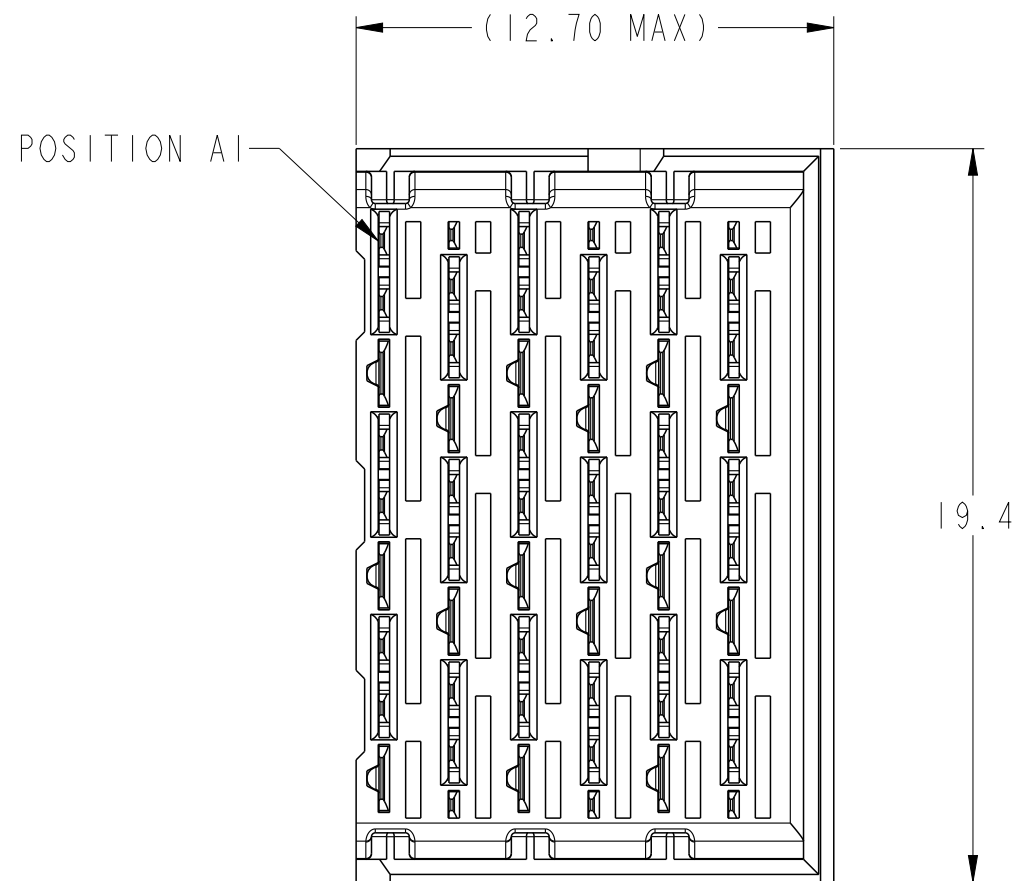

5.2 (3MM SMALL END GROUNDS)
5.2 (3MM WIPE SIGNALS)
4.2 (2MM WIPE SIGNALS)
SEE P/N TREE

6.2 (4MM WIPE WIDE GROUNDS)
5.2 (3MM WIPE WIDE GROUNDS)

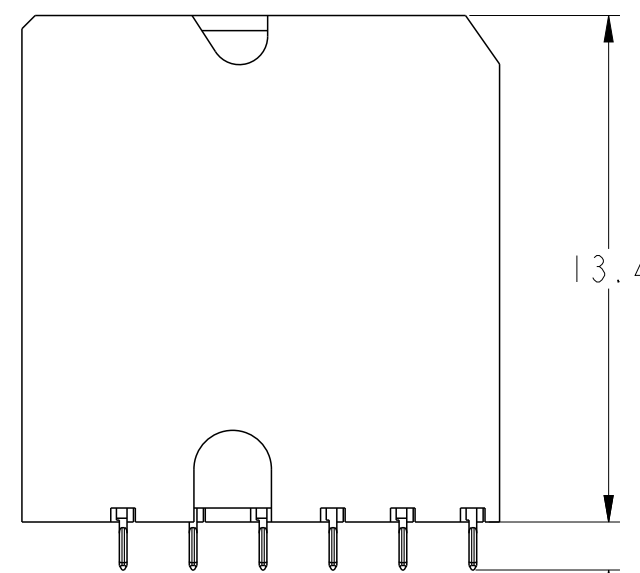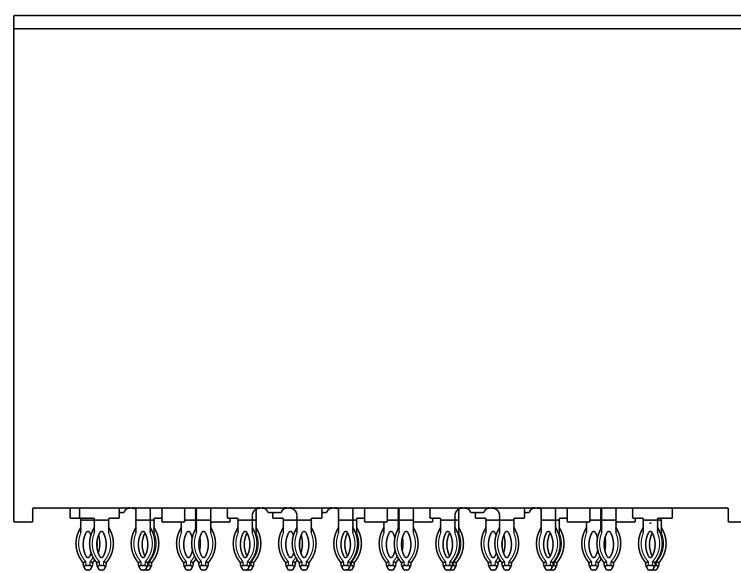

TAIL LENGTH
SEE NOTE 12

spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	Sandar Soe	2014/10/02		MM	ecn no	ELX-S-18843-1	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	-	-						
surface	✓	appr	Chen-Hong Tan	2014/12/10	product family	XCEDE	rel level	Released	size	A2
ASME Y14.5	linear	linear	0.X	±0.2	linear	0.XX	±0.10	linear	0.XXX	±0.050
	angular	angular	0°	±2°						
www.fci.com		cat. no.		Product - Customer Drw		sheet 6 of 8		rev		B

PDS: Rev :B







STATUS:Released

Printed: Dec 10, 2014



Copyright FCI.

FOUR WALL MODULE

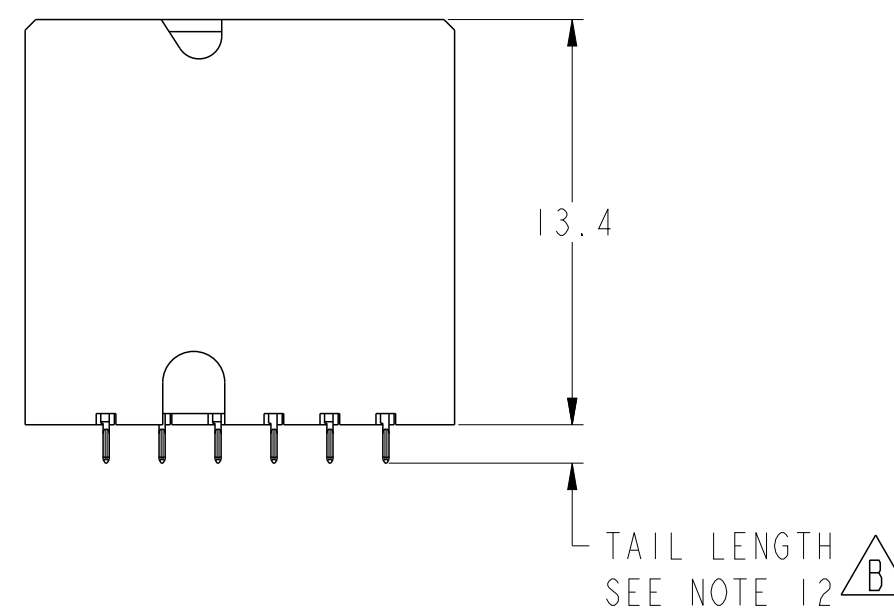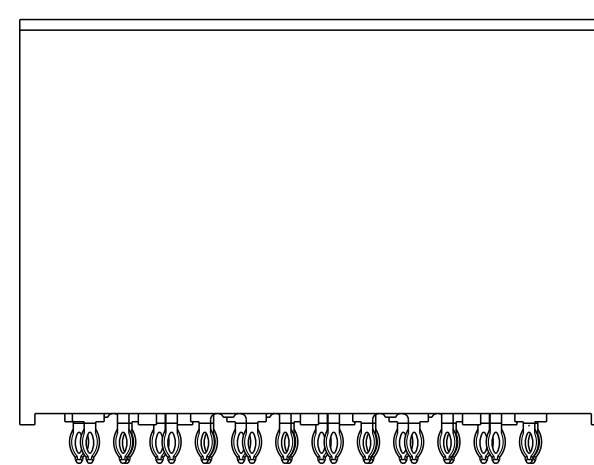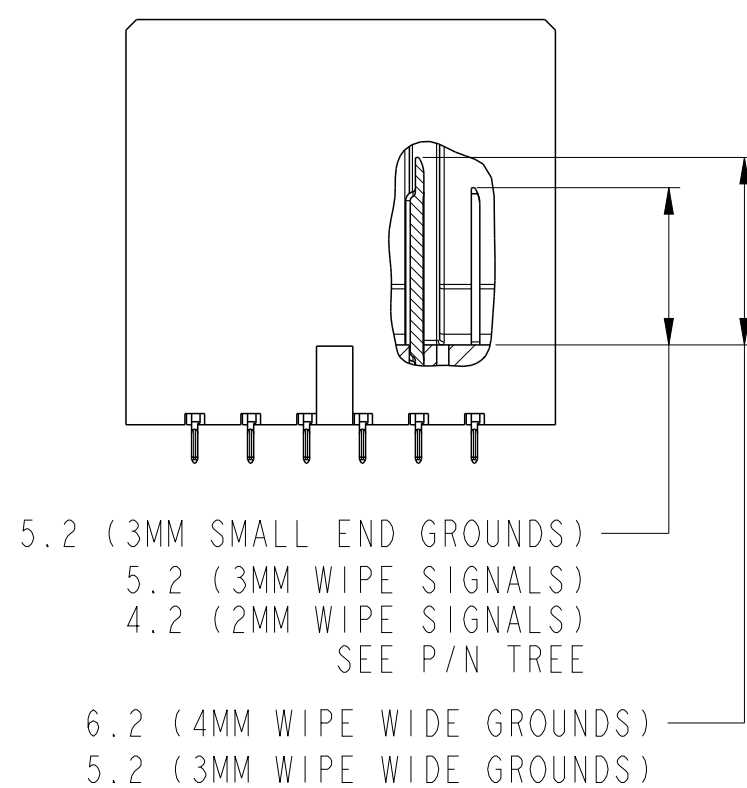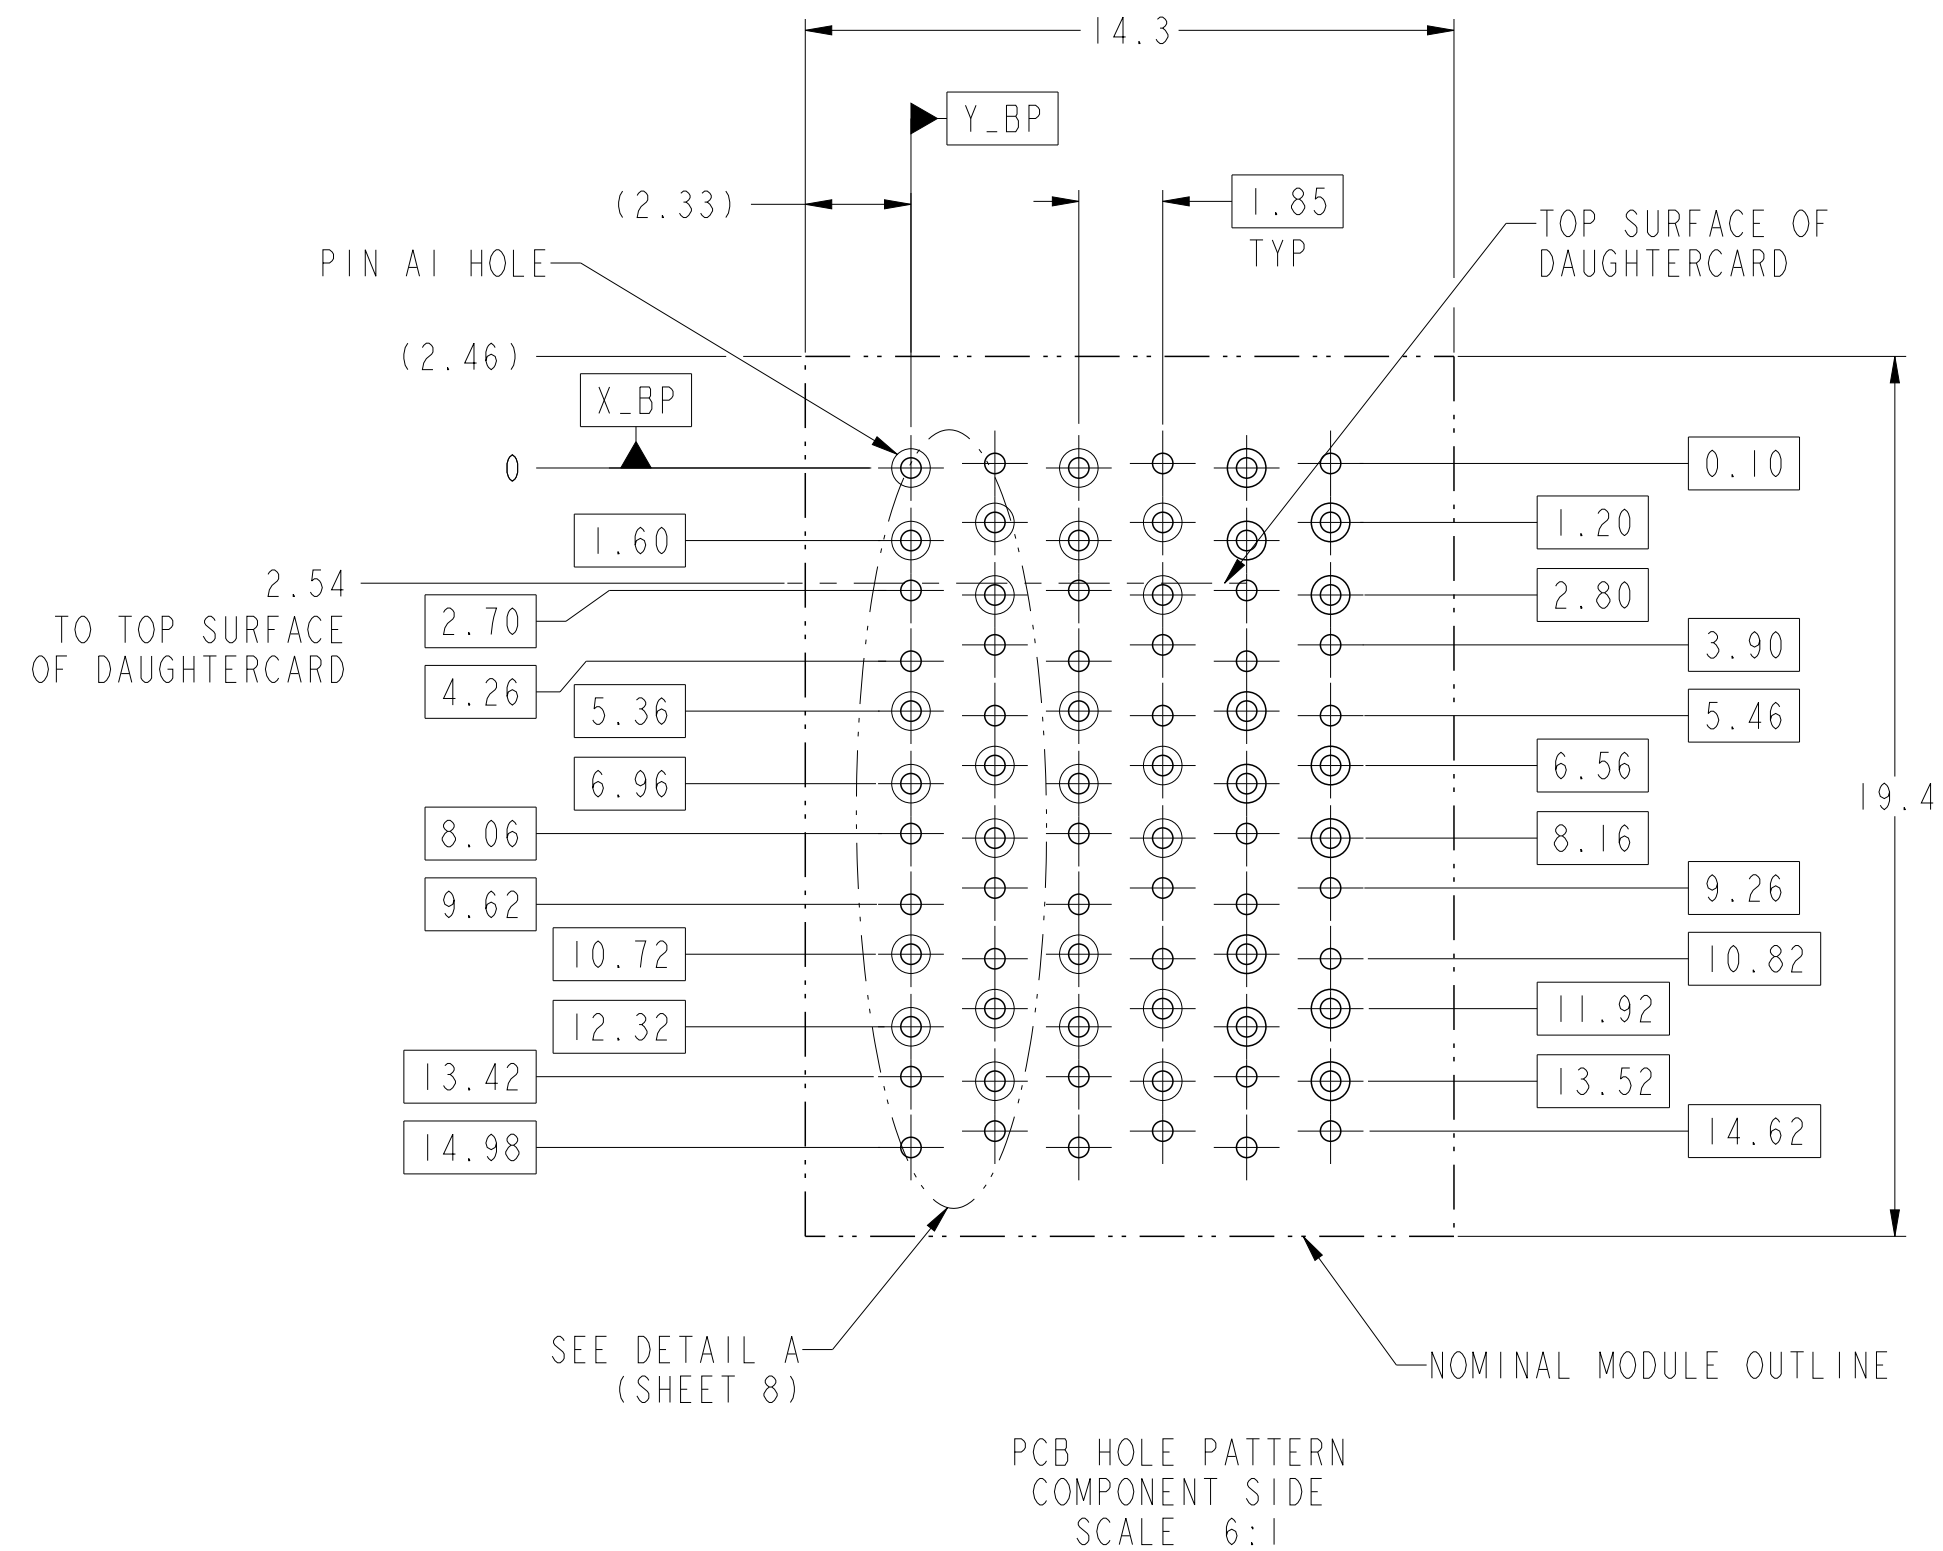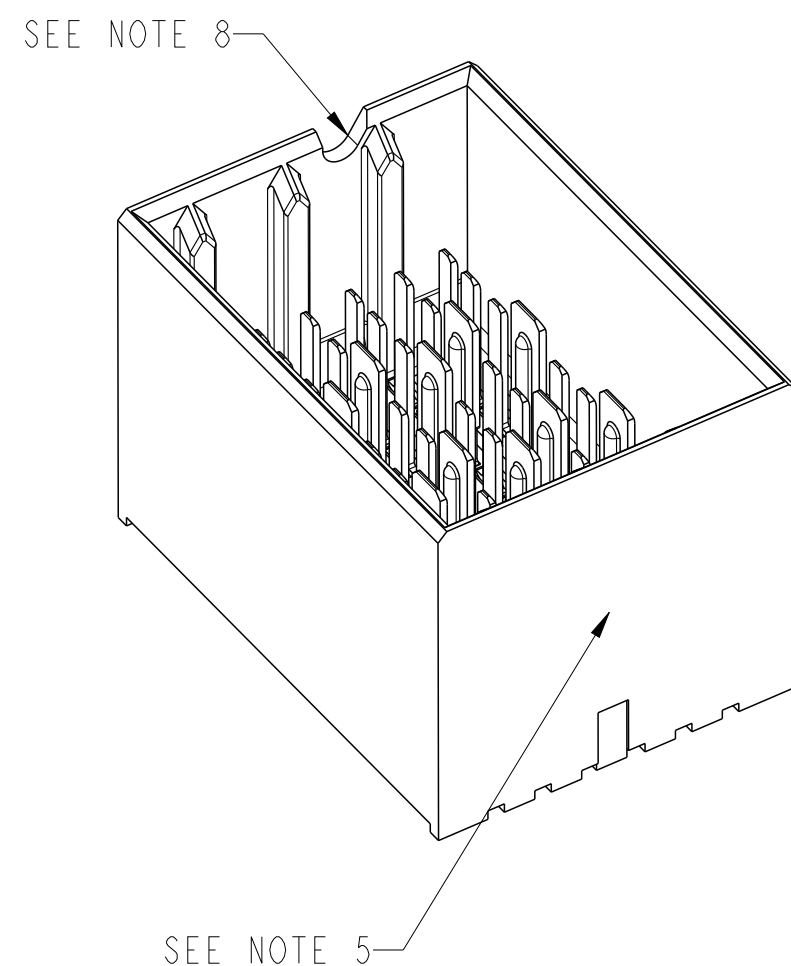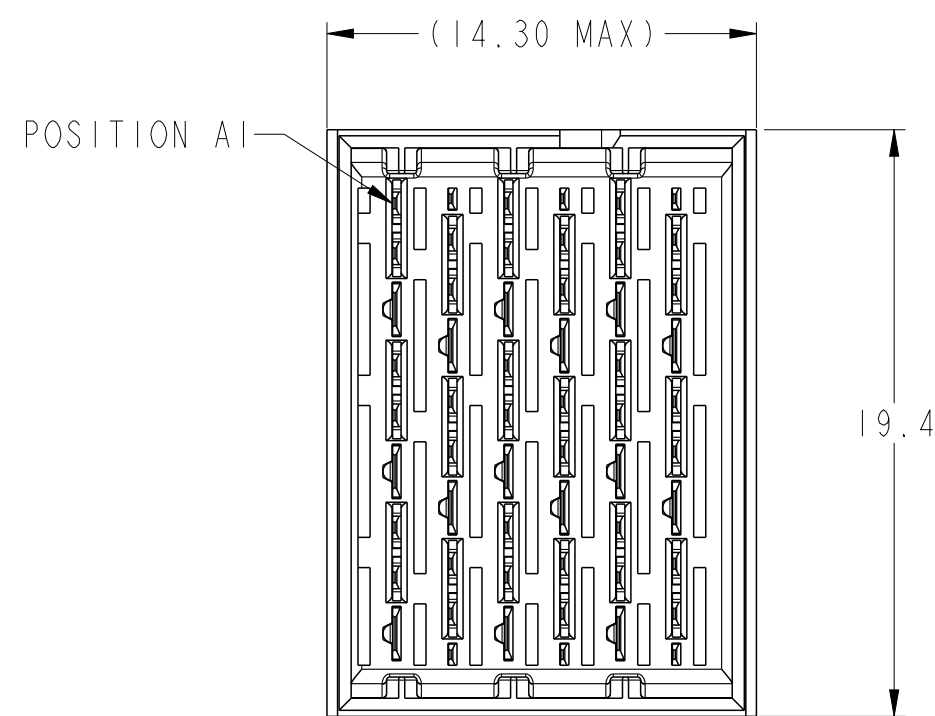

spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	Sandar Soe	2014/10/02	chr	-	ecn no	ELX-S-18843-1	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Chen-Hong Tan	2014/12/10	product family	XCEDE	rel level	Released	rev	B
surface	linear	0.X	±0.2	0.XX	±0.10	0.XXX	±0.050	angular	0°	±2°
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 7 of 8		

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

NOTES:

1. CONNECTOR MATERIALS
SHROUD: HIGH-TEMP THERMOPLASTIC, GRAY, UL94V-0
CONTACTS: HIGH PERFORMANCE COPPER ALLOY
2. CONTACT PLATING:

SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12 588, INCLUDING THE TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE (CO) OR UNCONTROLLED ENVIRONMENT (UE) TEST SEQUENCE AS NOTED IN P/N TREE.

PRESS-FIT TAILS: TIN OVER NICKEL (LF), OR TIN-LEAD ALLOY OVER NICKEL (NON-LF). SEE P/N TREE.
3. PRODUCT SPECIFICATION: GS-12-588
4. APPLCATION SPECIFICATION: GS-20-121
5. PRODUCT MARKING (PART NUMBER AND LOT CODE) ON THESE SURFACES.
6. HOUSING MUST WITHSAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR-PHASE REFLOW OVEN.
7. PACKAGING MEETS GS-14-920 LEAD-FREE LABELING SPECIFICATION.
8. NOTCH INDICATES "ROW A" SIDE OF CONNECTOR.
9. SEE APPLICATION SPECIFICATION FOR ROUTING GUIDELINES, ADDITIONAL PTH GUIDELINES, MATED DIMENSIONS, GUIDE PN SELECTION, ETC.
10. SCREW IS OPTIONAL AND ENGAGES WITH BOTTOM OF GUIDE-PIN FROM BENEATH THE PCB FOR ADDITIONAL GUIDE-PIN SUPPORT.
11. OPTINAL HOLE LOCATION FOR GROUNDED PIN OR ADDITIONAL GUIDE-PIN SUPPORT. SEE TABLE 1 ON SHEET 1 FOR ADDITIONAL DETAILS.
- B

12. TAIL LENGTH=1.3mm FOR Ø0.55[0.0217"]COMPLIANT PIN DRILL
TAIL LENGTH=1.5mm FOR Ø0.45[0.0177"]COMPLIANT PIN DRILL
13. A



B

 SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE THAT HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

TABLE 3: PTH AND PAD SIZES WITH REFERENCE TO COMPLIANT PIN DRILL

COMPLIANT PIN DRILL	PTH	PAD
Ø0.55 [0.0217"]	Ø0.45±0.05	Ø0.85
Ø0.45 [0.0177"]	Ø0.36±0.05	Ø0.75

REFER TO TABLE 3 FOR PTH, DRILL & PAD SIZES

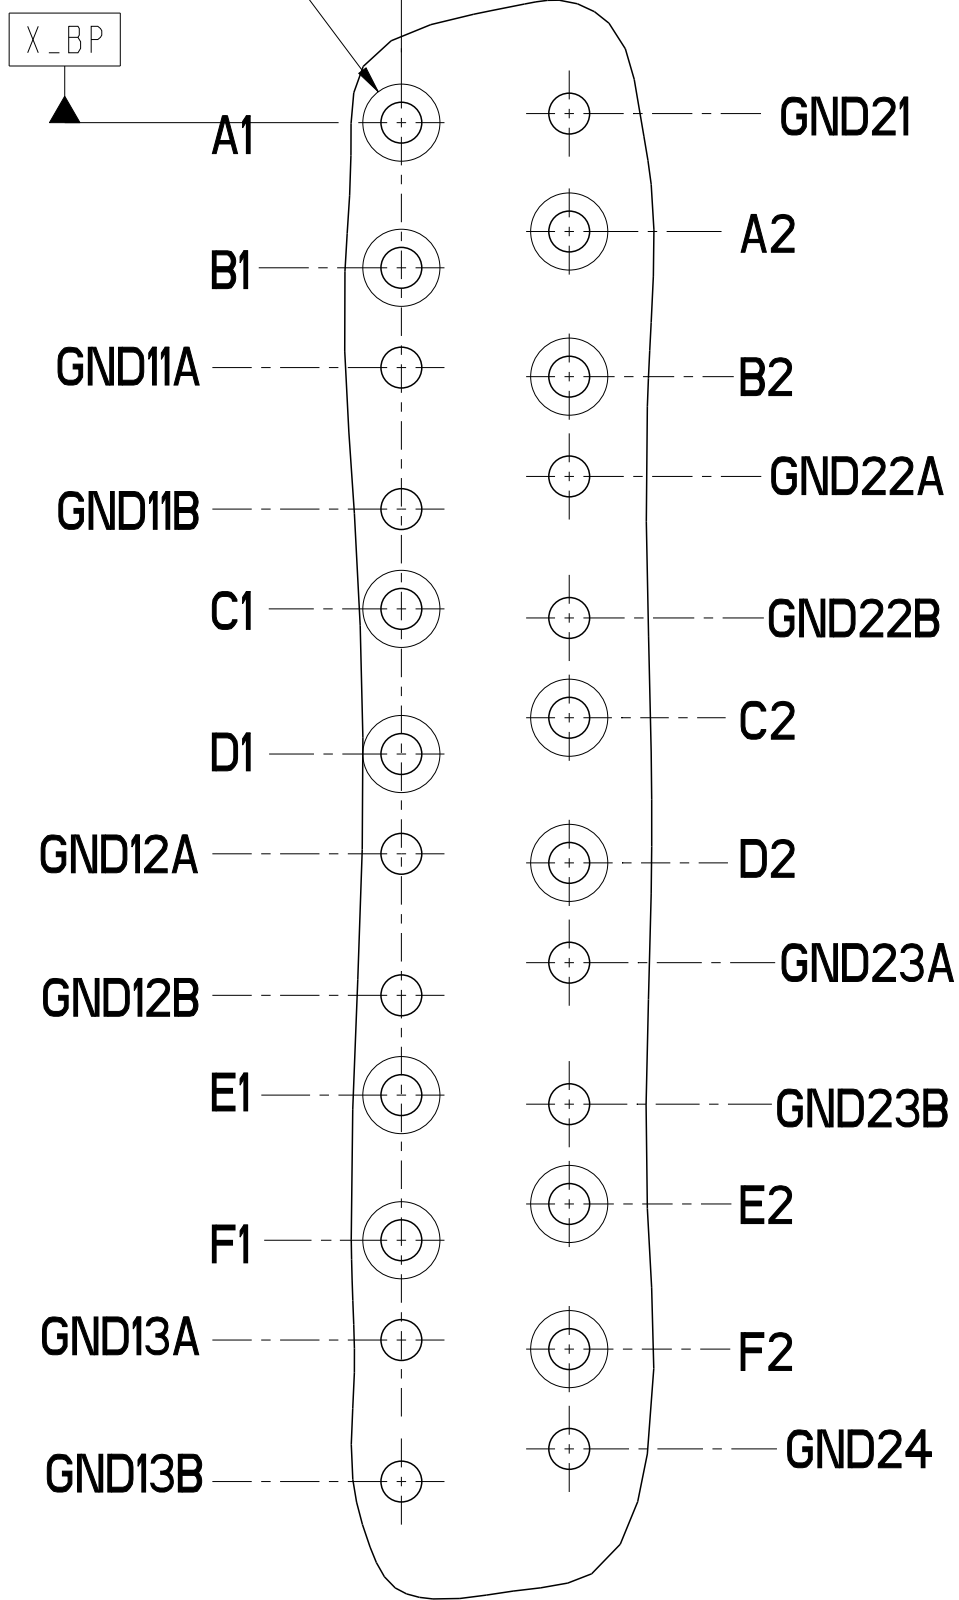

DETAIL A
SCALE 12:1

spec ref		-		dr		Roger Ng		2011/11/22		projection		MM		size		A2		scale		4:1					
tolerance std		-		eng		Sandar Soe		2014/10/02						ecn no		ELX-S-18843-1		rel level		Released					
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-																	
				appr		Chen-Hong Tan		2014/12/10														product family		XCED	
surface		✓		linear		0.X		±0.2						title		MODULE ASSEMBLY VERTICAL HEADER, 6 COLUMN, 3 PAIR		dwg no		10119189		rev		B	
						0.XX		±0.10																	
						0.XXX		±0.050																	
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 8 of 8									

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.