

Advantages of the 70S2 Series

Since acquiring this line of miniature SSRs from Grayhill, this product has continuously evolved both functionally and visually. The 70S2 Series relays are designed for medium-power loads. The design incorporates a triac output for AC loads and MOSFETs for DC loads. The 70S2 Series relays use optical isolation to protect the control from transients. The 70S2 compact package is available in a combination of screw, fast-on or PCB terminals. Its compact size makes it ideal for designs where space is limited. The 70S2 Series relays have excellent thermal performance.



- Switch up to 5 Amps
- Integrated Thermal Management
- PCB Mount

70S2 V (5 Amp)



70S2 V (3 Amp)



- Switch up to 25 Amps
- Screw Terminals
- Panel Mount

70S2 S



- Switch up to 12 Amps
- Blade Terminals
- Panel Mount

70S2 N

- **Small Packages**
Ideal for Tight Designs..
- **Eight Different Packages**
Wide Choice of Design Options.
- **Optically Isolated**
Input Isolated from Output.
- **Zero Cross Switching**
Reduced Current Surges for Most Loads.
- **Internal Snubber**
Excellent Transient Protection.



We're very pleased at the breadth of products and solutions we are able to offer engineers and designers. And this is just the beginning.

We will continue to develop high value products - with innovative features not offered anywhere else in the industry.



70S2 F

- Switch up to 4 Amps
- Solder Terminals
- PCB Mount



70S2 M

- Switch up to 10 Amps
- Solder Terminals
- PCB/Panel Mount



70S2 H

- Switch up to 2.5 Amps
- Solder Terminals
- PCB Mount



70S2 L

- Switch up to 6 Amps
- Solder Terminals
- PCB/Panel Mount



70S2 K

- Switch up to 4 Amps
- Socket Compatible

70S2 Series Solid State Relays/3, 5 Amp, V Style



UL
UL Recognized
File No. E258297



General Specifications (@ 25° C) (UL 508)

| Output Characteristics | | Units | 70S2-04-D | 70S2-05-D | 70S2-04-B |
|--|----------------------|--------|------------|------------|-------------|
| Number and type of Contacts | | | SPST-NO | SPST-NO | SPST-NO |
| Switching Device | | | Triac | Triac | Triac |
| Current Rating | A | | 3 / 5 | 3 | 3 / 5 |
| Switching voltage | V | | 8...50 AC | 8...50 AC | 24...140 AC |
| Switching Type | | | Zero Cross | Zero Cross | Zero Cross |
| Maximum Rate of Rise Off State Voltage (dv/dt) | V/us | | 300 | 300 | 300 |
| Min. Load current to maintain on | mA | | 75 / 50 | 75 | 75 / 50 |
| Non-Repetitive Surge Current (1 cycle) | A | | 60 / 300 | 60 | 60 / 300 |
| Max. Off state leakage current (rms) | mA | | 3 / 10 | 3 | 6 / 10 |
| Typical On State Voltage Drop (rms) | V | | 1.6 AC | 1.6 AC | 1.6 AC |
| Minimum Peak Blocking Voltage | V | | 200 AC | 200 AC | 400 AC |
| Input Characteristics | | | | | |
| Voltage Range | V | | 3...32 DC | 6...32 DC | 3...32 DC |
| Must Release Voltage | V | | 1 DC | 1 DC | 1 DC |
| Typical Input Current @ 5VDC or 240VAC | mA | | 1...19 | 1...6 | 1...19 |
| Max. Reverse Control Voltage | V | | 3 DC | 3 DC | 3 DC |
| Performance Characteristics | | | | | |
| Operating time (response time) | On | ms | 8.3 | 8.3 | 8.3 |
| | Off | ms | 8.3 | 8.3 | 8.3 |
| Dielectric strength | Terminals to Chassis | V | 4000 AC | 4000 AC | 4000 AC |
| | Input to Output | V | 4000 AC | 4000 AC | 4000 AC |
| Environment | | | | | |
| Product certifications | Standard version | | UR, CSA | UR, CSA | UR, CSA |
| Ambient air temperature around the device | Storage | °C | -40...+125 | -40...+125 | -40...+125 |
| | Operation | °C | -40...+100 | -40...+100 | -40...+100 |
| Miscellaneous Characteristics | | | | | |
| Thermal Resistance (Junction to Case) | | °C/W | 0.5 | 0.5 | 0.5 |
| Weight | | g (oz) | 25 (0.9) | 25 (0.9) | 25 (0.9) |



70S2 V (3 Amp)



70S2 V (5 Amp)


NEW
NEW
NEW
NEW

| 70S2-05-B | 70S2-04-C | 70S2-05-C | 70S2-01-A | 70S2-02-A |
|--------------|--------------|--------------|--------------|--------------|
| SPST-NO | SPST-NO | SPST-NO | SPST-NO | SPST-NO |
| Triac | Triac | Triac | MOSFET | MOSFET |
| 3 | 3 / 5 | 3 | 3 | 3 |
| 24....140 AC | 24....280 AC | 24....280 AC | 3....60 DC | 3....60 DC |
| Zero Cross | Zero Cross | Zero Cross | DC Switching | DC Switching |
| 300 | 300 | 300 | N/A | N/A |
| 75 | 75 / 50 | 75 | 100 | 100 |
| 60 | 60 / 300 | 60 | 5 (1 SEC) | 6 (1 SEC) |
| 6 | 6 / 10 | 6 | 10 μ A | 10 μ A |
| 1.6 AC | 1.6 AC | 1.6 AC | 1.2 DC | 1.2 DC |
| 400 AC | 600 AC | 600 AC | 105 DC | 105 DC |
| 6....32 DC | 3....32 DC | 6....32 DC | 3....15 DC | 9....30 DC |
| 1 DC | 1 DC | 1 DC | 1 DC | 1 DC |
| 1....6 | 1....19 | 1....6 | 5....40 | 5....17 |
| 3 DC | 3 DC | 3 DC | 3 DC | 3 DC |
| 8.3 | 8.3 | 8.3 | 75 μs | 75 μs |
| 8.3 | 8.3 | 8.3 | 500 μs | 500 μs |
| 4000 AC | 4000 AC | 4000 AC | 4000 AC | 4000 AC |
| 4000 AC | 4000 AC | 4000 AC | 4000 AC | 4000 AC |
| UR, CSA | UR, CSA | UR, CSA | UR, CSA | UR, CSA |
| -40...+125 | -40...+125 | -40...+125 | -40...+125 | -40...+125 |
| -40...+100 | -40...+100 | -40...+100 | -40...+100 | -40...+100 |
| 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| 25 (0.9) | 25 (0.9) | 25 (0.9) | 25 (0.9) | 25 (0.9) |

70S2 Series Solid State Relays/3, 5 Amp, V Style *continued*



UL **us**
UL Recognized
File No. E258297

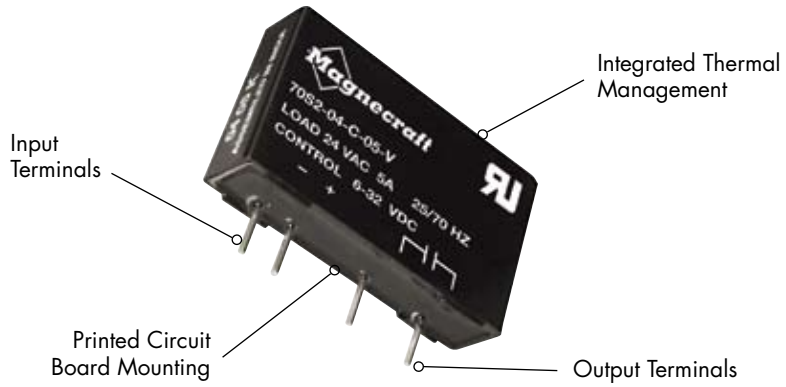



70S2 V (3 Amp)



70S2 V (5 Amp)

NEW
NEW
NEW
NEW

Standard Part Numbers

BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

| DC Operated | Input Voltage Range | Output Voltage Range | Contact Configuration | Switching Type | Rated Current Load (Amps) |
|-----------------------|---------------------|----------------------|-----------------------|----------------|---------------------------|
| 70S2-04-D-03-V | 3...32 VDC | 8...50 VAC | SPST-NO | Zero Cross | 3 |
| 70S2-05-D-03-V | 6...32 VDC | 8...50 VAC | SPST-NO | Zero Cross | 3 |
| 70S2-04-D-05-V | 3...32 VDC | 8...50 VAC | SPST-NO | Zero Cross | 5 |
| 70S2-04-B-03-V | 3...32 VDC | 24...140 VAC | SPST-NO | Zero Cross | 3 |
| 70S2-05-B-03-V | 6...32 VDC | 24...140 VAC | SPST-NO | Zero Cross | 3 |
| 70S2-04-B-05-V | 3...32 VDC | 24...140 VAC | SPST-NO | Zero Cross | 5 |
| 70S2-04-C-03-V | 3...32 VDC | 24...280 VAC | SPST-NO | Zero Cross | 3 |
| 70S2-05-C-03-V | 6...32 VDC | 24...280 VAC | SPST-NO | Zero Cross | 3 |
| 70S2-04-C-05-V | 3...32 VDC | 24...280 VAC | SPST-NO | Zero Cross | 5 |
| 70S2-01-A-03-V | 3...15 VDC | 3...60 VDC | SPST-NO | Zero Cross | 3 |
| 70S2-02-A-03-V | 9...30 VDC | 3...60 VDC | SPST-NO | Zero Cross | 3 |

Part Number Builder

| Series | Input Voltage | Output Voltage | Output Current | Package Style |
|--------|--|-------------------|----------------|---------------|
| 70S2 | 01 = 3 to 15 VDC, DC/DC RELAYS | A = 3 to 60 VDC | 02 = 2.5 AMPS | V = V STYLE |
| | 02 = 9 to 30 VDC, DC/DC RELAYS | B = 24 to 140 VAC | 03 = 3 AMPS | N = N STYLE |
| | 03 = 3 to 30 VDC, 25 A S PACK | C = 24 to 280 VAC | 04 = 4 AMPS | S = S STYLE |
| | 04 = 3 to 30 VDC (OR 32 VDC), DC/AC RELAYS | D = 8 to 50 VAC | 05 = 5 AMPS | F = F STYLE |
| | 05 = 6 to 30 VDC (OR 32 VDC), DC/AC RELAYS | | 06 = 6 AMPS | M = M STYLE |
| | | | 10 = 10 AMPS | H = H STYLE |
| | | | 12 = 12 AMPS | L = L STYLE |
| | | | 25 = 25 AMPS | K = K STYLE |

Maximum Continuous Current vs. Ambient Temperature

Style V, 3 Amp



Style V, 5 Amp



70S2 Series Solid State Relays/N and S Style



General Specifications (@ 25° C) (UL 508)

| Output Characteristics | | Units | 70S2-04-B | 70S2-05-B | 70S2-04-C |
|--|----------------------|--------|--------------|--------------|--------------|
| Number and type of Contacts | | | SPST-NO | SPST-NO | SPST-NO |
| Switching Device | | | Triac | Triac | Triac |
| Current Rating | | A | 6 / 12 | 6 / 12 | 6 / 12 |
| Switching voltage | | V | 24....140 AC | 24....140 AC | 24....280 AC |
| Switching Type | | | Zero Cross | Zero Cross | Zero Cross |
| Maximum Rate of Rise Off State Voltage (dv/dt) | | V/us | 300 | 300 | 300 |
| Min. Load current to maintain on | | mA | 75 / 100 | 75 / 100 | 75 / 100 |
| Non-Repetitive Surge Current (1 cycle) | | A | 60 / 150 | 60 / 150 | 60 / 150 |
| Max. Off state leakage current (rms) | | mA | 6 | 6 | 6 |
| Typical On State Voltage Drop (rms) | | V | 1.6 AC | 1.6 AC | 1.6 AC |
| Minimum Peak Blocking Voltage | | V | 400 AC | 400 AC | 600 AC |
| Input Characteristics | | | | | |
| Voltage Range | | V | 3....30 DC | 6....30 DC | 3....30 DC |
| Must Release Voltage | | V | 1 DC | 1 DC | 1 DC |
| Typical Input Current @ 5VDC or 240VAC | | mA | 7....16 | 6....10 | 7....16 |
| Max. Reverse Control Voltage | | V | 3 DC | 3 DC | 3 DC |
| Performance Characteristics | | | | | |
| Operating time (response time) | On | ms | 8.3 | 8.3 | 8.3 |
| | Off | ms | 8.3 | 8.3 | 8.3 |
| Dielectric strength | Terminals to Chassis | V | 3000 AC | 3000 AC | 3000 AC |
| | Input to Output | V | 3000 AC | 3000 AC | 3000 AC |
| Environment | | | | | |
| Product certifications | Standard version | | UR, CSA | UR, CSA | UR, CSA |
| Ambient air temperature around the device | Storage | °C | -40...+125 | -40...+125 | -40...+125 |
| | Operation | °C | -40...+100 | -40...+100 | -40...+100 |
| Miscellaneous Characteristics | | | | | |
| Thermal Resistance (Junction to Case) | | °C/W | 4 | 4 | 4 |
| Weight | | g (oz) | 47 (1.7) | 47 (1.7) | 47 (1.7) |
| Mounting Screw Torque | | Nm | 1.0 | 1.0 | 1.0 |

Maximum Continuous Current vs. Ambient Temperature





70S2 N



70S2 S

| 70S2-05-C | 70S2-03-B | 70S2-03-C | 70S2-01-A | 70S2-02-A |
|--------------|--------------|--------------|--------------|--------------|
| SPST-NO | SPST-NO | SPST-NO | SPST-NO | SPST-NO |
| Triac | Triac | Triac | MOSFET | MOSFET |
| 6 / 12 | 25 | 25 | 5 | 5 |
| 24....280 AC | 24....140 AC | 24....280 AC | 3....60 DC | 3....60 DC |
| Zero Cross | Zero Cross | Zero Cross | DC Switching | DC Switching |
| 300 | 300 | 300 | N/A | N/A |
| 75 / 100 | 100 | 100 | 100 | 100 |
| 60 / 150 | 300 | 300 | 7 (1 SEC) | 7 (1 SEC) |
| 6 | 6 | 6 | 10 μ A | 10 μ A |
| 1.6 AC | 1.7 AC | 1.7 AC | 1.85 DC | 1.85 DC |
| 600 AC | 400 AC | 600 AC | 105 DC | 105 DC |
| 6....30 DC | 3....30 DC | 3....30 DC | 3....15 DC | 9....30 DC |
| 1 DC | 1 DC | 1 DC | 1 DC | 1 DC |
| 6....10 | 7....16 | 6....10 | 5....40 | 5....17 |
| 3 DC | 3 DC | 3 DC | 3 DC | 3 DC |
| 8.3 | 8.3 | 8.3 | 75 μs | 75 μs |
| 8.3 | 8.3 | 8.3 | 750 μs | 750 μs |
| 3000 AC | 3000 AC | 3000 AC | 2500 AC | 2500 AC |
| 3000 AC | 3000 AC | 3000 AC | 2500 AC | 2500 AC |
| UR, CSA | UR, CSA | UR, CSA | UR, CSA | UR, CSA |
| -40...+125 | -40...+125 | -40...+125 | -40...+125 | -40...+125 |
| -40...+100 | -40...+100 | -40...+100 | -40...+100 | -40...+100 |
| 4 | 4 | 4 | 4 | 4 |
| 47 (1.7) | 47 (1.7) | 47 (1.7) | 47 (1.7) | 35 (1.2) |
| 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |

70S2 Series Solid State Relays/N and S Style *continued*



70S2 S



70S2 N



0.02 (0.5) TERMINALS 0.032 (0.8) TERMINALS



70S2 N



70S2 S

Standard Part Numbers

BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

| DC Operated | Input Voltage Range | Output Voltage Range | Contact Configuration | Switching Type | Rated Current Load (Amps) |
|-----------------------|---------------------|----------------------|-----------------------|----------------|---------------------------|
| 70S2-04-B-06-N | 3...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-05-B-06-N | 6...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-04-B-12-N | 3...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 12 |
| 70S2-05-B-12-N | 6...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 12 |
| 70S2-04-C-06-N | 3...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-05-C-06-N | 6...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-04-C-12-N | 3...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 12 |
| 70S2-05-C-12-N | 6...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 12 |
| 70S2-01-A-05-N | 3...15 VDC | 3...60 VDC | SPST-NO | DC Switching | 5 |
| 70S2-04-B-06-S | 3...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-05-B-06-S | 6...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-04-B-12-S | 3...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 12 |
| 70S2-05-B-12-S | 6...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 12 |
| 70S2-03-B-25-S | 3...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 25 |
| 70S2-04-C-06-S | 3...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-05-C-06-S | 6...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-04-C-12-S | 3...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 12 |
| 70S2-05-C-12-S | 6...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 12 |
| 70S2-03-C-25-S | 3...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 25 |
| 70S2-01-A-05-S | 3...15 VDC | 3...60 VDC | SPST-NO | DC Switching | 5 |
| 70S2-02-A-05-S | 9...30 VDC | 3...60 VDC | SPST-NO | DC Switching | 5 |

Part Number Builder

| Series | Input Voltage | Output Voltage | Output Current | Package Style |
|--------|--|-------------------|----------------|---------------|
| 70S2 | 01 = 3 to 15 VDC, DC/DC RELAYS | A = 3 to 60 VDC | 02 = 2.5 AMPS | V = V STYLE |
| | 02 = 9 to 30 VDC, DC/DC RELAYS | B = 24 to 140 VAC | 03 = 3 AMPS | N = N STYLE |
| | 03 = 3 to 30 VDC, 25 A S PACK | C = 24 to 280 VAC | 04 = 4 AMPS | S = S STYLE |
| | 04 = 3 to 30 VDC (OR 32 VDC), DC/AC RELAYS | D = 8 to 50 VAC | 05 = 5 AMPS | F = F STYLE |
| | 05 = 6 to 30 VDC (OR 32 VDC), DC/AC RELAYS | | 06 = 6 AMPS | M = M STYLE |
| | | | 10 = 10 AMPS | H = H STYLE |
| | | | 12 = 12 AMPS | L = L STYLE |
| | | | 25 = 25 AMPS | K = K STYLE |

70S2 Series Solid State Relays/F and M Style



General Specifications (@ 25° C) (UL 508)

| Output Characteristics | | Units | 70S2-04-B | 70S2-05-B |
|--|----------------------|--------|--------------|--------------|
| Number and type of Contacts | | | SPST-NO | SPST-NO |
| Switching Device | | | Triac | Triac |
| Current Rating | | A | 4 6 10 | 4 6 10 |
| Switching voltage | | V | 24....140 AC | 24....140 AC |
| Switching Type | | | Zero Cross | Zero Cross |
| Maximum Rate of Rise Off State Voltage (dv/dt) | | V/us | 300 | 300 |
| Min. Load current to maintain on | | mA | 75 100 | 75 100 |
| Non-Repetitive Surge Current (1 cycle) | | A | 60 110 | 60 110 |
| Max. Off state leakage current (rms) | | mA | 6 | 6 |
| Typical On State Voltage Drop (rms) | | V | 1.6 AC | 1.6 AC |
| Minimum Peak Blocking Voltage | | V | 400 AC | 400 AC |
| Input Characteristics | | | | |
| Voltage Range | | V | 3....30 DC | 6....30 DC |
| Must Release Voltage | | V | 1 DC | 1 DC |
| Typical Input Current @ 5VDC or 240VAC | | mA | 7....16 | 6....10 |
| Max. Reverse Control Voltage | | V | 3 DC | 3 DC |
| Performance Characteristics | | | | |
| Operating time (response time) | On | ms | 8.3 | 8.3 |
| | Off | ms | 8.3 | 8.3 |
| Dielectric strength | Terminals to Chassis | V | 3000 AC | 3000 AC |
| | Input to Output | V | 3000 AC | 3000 AC |
| Environment | | | | |
| Product certifications | Standard version | | UR, CSA | UR, CSA |
| Ambient air temperature around the device | Storage | °C | -40...+125 | -40...+125 |
| | Operation | °C | -40...+100 | -40...+100 |
| Miscellaneous Characteristics | | | | |
| Thermal Resistance (Junction to Case) | | °C/W | 4 | 4 |
| Weight | | g (oz) | 35 (1.2) | 35 (1.2) |
| Mounting Screw Torque | | Nm | 1.0 | 1.0 |

Maximum Continuous Current vs. Ambient Temperature






70S2 F



70S2 M

| 70S2-04-C | 70S2-05-C | 70S2-01-A | 70S2-02-A |
|--------------|--------------|--------------|--------------|
| SPST-NO | SPST-NO | SPST-NO | SPST-NO |
| Triac | Triac | MOSFET | MOSFET |
| 4 6 10 | 4 6 10 | 3 | 3 |
| 24....280 AC | 24....280 AC | 3....60 DC | 3....60 DC |
| Zero Cross | Zero Cross | DC Switching | DC Switching |
| 300 | 300 | N/A | N/A |
| 75 100 | 75 100 | 100 | 100 |
| 60 110 | 60 110 | N/A | N/A |
| 6 | 6 | 10 μ A | 10 μ A |
| 1.6 AC | 1.6 AC | 1.2 DC | 1.2 DC |
| 600 AC | 600 AC | 105 DC | 105 DC |
| 3....30 DC | 6....30 DC | 3....15 DC | 9....30 DC |
| 1 DC | 1 DC | 1 DC | 1 DC |
| 7....16 | 6....10 | 5....40 | 5....17 |
| 3 DC | 3 DC | 3 DC | 3 DC |
| 8.3 | 8.3 | 75 μ s | 75 μ s |
| 8.3 | 8.3 | 500 μ s | 500 μ s |
| 3000 AC | 3000 AC | 2500 AC | 2500 AC |
| 3000 AC | 3000 AC | 2500 AC | 2500 AC |
| UR, CSA | UR, CSA | UR, CSA | UR, CSA |
| -40...+125 | -40...+125 | -40...+125 | -40...+125 |
| -40...+100 | -40...+100 | -40...+100 | -40...+100 |
| 4 | 4 | 4 | 4 |
| 35 (1.2) | 35 (1.2) | 35 (1.2) | 35 (1.2) |
| 1.0 | 1.0 | 1.0 | 1.0 |

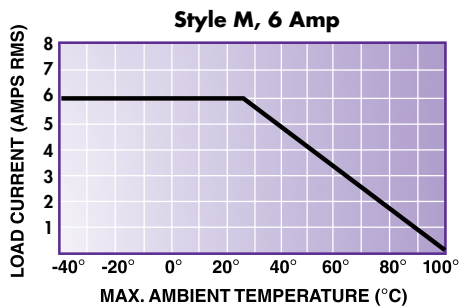

70S2 Series Solid State Relays/F and M Style *continued*



SECTION 4



POTTING MIGRATION ON LEADS

70S2 F



70S2 M





70S2 F



70S2 M

Standard Part Numbers

BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

| DC Operated | Input Voltage Range | Output Voltage Range | Contact Configuration | Switching Type | Rated Current Load (Amps) |
|-----------------------|---------------------|----------------------|-----------------------|----------------|---------------------------|
| 70S2-04-B-04-F | 3...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-05-B-04-F | 6...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-04-C-04-F | 3...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-05-C-04-F | 6...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-01-A-03-F | 3...15 VDC | 3...60 VDC | SPST-NO | DC Switching | 3 |
| 70S2-02-A-03-F | 9...30 VDC | 3...60 VDC | SPST-NO | DC Switching | 3 |
| 70S2-04-B-06-M | 3...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-05-B-06-M | 6...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-04-B-10-M | 3...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 10 |
| 70S2-05-B-10-M | 6...30 VDC | 24...140 VAC | SPST-NO | Zero Cross | 10 |
| 70S2-04-C-06-M | 3...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-05-C-06-M | 6...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-04-C-10-M | 3...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 10 |
| 70S2-05-C-10-M | 6...30 VDC | 24...280 VAC | SPST-NO | Zero Cross | 10 |

Part Number Builder

| Series | Input Voltage | Output Voltage | Output Current | Package Style |
|--------|--|-------------------|----------------|---------------|
| 70S2 | 01 = 3 to 15 VDC, DC/DC RELAYS | A = 3 to 60 VDC | 02 = 2.5 AMPS | V = V STYLE |
| | 02 = 9 to 30 VDC, DC/DC RELAYS | B = 24 to 140 VAC | 03 = 3 AMPS | N = N STYLE |
| | 03 = 3 to 30 VDC, 25 A S PACK | C = 24 to 280 VAC | 04 = 4 AMPS | S = S STYLE |
| | 04 = 3 to 30 VDC (OR 32 VDC), DC/AC RELAYS | D = 8 to 50 VAC | 05 = 5 AMPS | F = F STYLE |
| | 05 = 6 to 30 VDC (OR 32 VDC), DC/AC RELAYS | | 06 = 6 AMPS | M = M STYLE |
| | | | 10 = 10 AMPS | H = H STYLE |
| | | | 12 = 12 AMPS | L = L STYLE |
| | | | 25 = 25 AMPS | K = K STYLE |

70S2 Series Solid State Relays/H and L Style



General Specifications (@ 25° C) (UL 508)

| Output Characteristics | | Units | 70S2-04-D | 70S2-05-D |
|--|----------------------|------------------|------------|------------|
| Number and type of Contacts | | | SPST-NO | SPST-NO |
| Switching Device | | | Triac | Triac |
| Current Rating | | A | 2.5 | 2.5 |
| Switching voltage | | V | 8...50 AC | 8...50 AC |
| Switching Type | | | Zero Cross | Zero Cross |
| Maximum Rate of Rise Off State Voltage (dv/dt) | | V/us | 300 | 300 |
| Min. Load current to maintain on | | mA | 75 | 75 |
| Non-Repetitive Surge Current (1 cycle) | | A | 60 | 60 |
| Max. Off state leakage current (rms) | | mA | 3 | 3 |
| Typical On State Voltage Drop (rms) | | V | 1.6 AC | 1.6 AC |
| Minimum Peak Blocking Voltage | | V | 200 AC | 200 AC |
| Input Characteristics | | | | |
| Voltage Range | | V | 3...30 DC | 6...30 DC |
| Must Release Voltage | | V | 1 DC | 1 DC |
| Typical Input Current @ 5VDC or 240VAC | | mA | 1...17 | 1...6 |
| Max. Reverse Control Voltage | | V | 3 DC | 3 DC |
| Performance Characteristics | | | | |
| Operating time (response time) | On | ms | 8.3 | 8.3 |
| | Off | ms | 8.3 | 8.3 |
| Dielectric strength | Terminals to Chassis | V | 2500 AC | 2500 AC |
| | Input to Output | V | 2500 AC | 2500 AC |
| Environment | | | | |
| Product certifications | | Standard version | UR, CSA | UR, CSA |
| Ambient air temperature around the device | Storage | °C | -40...+125 | -40...+125 |
| | Operation | °C | -40...+100 | -40...+100 |
| Miscellaneous Characteristics | | | | |
| Thermal Resistance (Junction to Case) | | °C/W | 3.5 | 3.5 |
| Weight | | g (oz) | 22 (0.8) | 22 (0.8) |
| Mounting Screw Torque | | Nm | 1.0 | 1.0 |

Maximum Continuous Current vs. Ambient Temperature





70S2 H



70S2 L

| 70S2-04-B | 70S2-05-B | 70S2-04-C | 70S2-05-C |
|--------------|--------------|--------------|--------------|
| SPST-NO | SPST-NO | SPST-NO | SPST-NO |
| Triac | Triac | Triac | Triac |
| 2.5 6 | 2.5 6 | 2.5 6 | 2.5 6 |
| 24....140 AC | 24....140 AC | 24....280 AC | 24....280 AC |
| Zero Cross | Zero Cross | Zero Cross | Zero Cross |
| 300 | 300 | 300 | 300 |
| 75 | 75 | 75 | 75 |
| 60 | 60 | 60 | 60 |
| 6 | 6 | 6 | 6 |
| 1.6 AC | 1.6 AC | 1.6 AC | 1.6 AC |
| 400 AC | 400 AC | 600 AC | 400 AC |
| 3....30 DC | 6....30 DC | 3....30 DC | 6....30 DC |
| 1 DC | 1 DC | 1 DC | 1 DC |
| 1....17 | 1....6 | 1....17 | 1....6 |
| 3 DC | 3 DC | 3 DC | 3 DC |
| 8.3 | 8.3 | 8.3 | 8.3 |
| 8.3 | 8.3 | 8.3 | 8.3 |
| 2500 AC | 2500 AC | 2500 AC | 2500 AC |
| 2500 AC | 2500 AC | 2500 AC | 2500 AC |
| UR, CSA | UR, CSA | UR, CSA | UR, CSA |
| -40...+125 | -40...+125 | -40...+125 | -40...+125 |
| -40...+100 | -40...+100 | -40...+100 | -40...+100 |
| 3.5 | 3.5 | 3.5 | 3.5 |
| 22 (0.8) | 22 (0.8) | 22 (0.8) | 22 (0.8) |
| 1.0 | 1.0 | 1.0 | 1.0 |

70S2 Series Solid State Relays/H and L Style *continued*



SECTION 4





70S2 H



70S2 L

Standard Part Numbers

BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

| DC Operated | Input Voltage Range | Output Voltage Range | Contact Configuration | Switching Type | Rated Current Load (Amps) |
|-----------------------|---------------------|----------------------|-----------------------|----------------|---------------------------|
| 70S2-04-D-02-H | 3....30 VDC | 8....50 VAC | SPST-NO | Zero Cross | 2.5 |
| 70S2-05-D-02-H | 6....30 VDC | 8....50 VAC | SPST-NO | Zero Cross | 2.5 |
| 70S2-04-B-02-H | 3....30 VDC | 24....140 VAC | SPST-NO | Zero Cross | 2.5 |
| 70S2-05-B-02-H | 6....30 VDC | 24....140 VAC | SPST-NO | Zero Cross | 2.5 |
| 70S2-04-C-02-H | 3....30 VDC | 24....280 VAC | SPST-NO | Zero Cross | 2.5 |
| 70S2-05-C-02-H | 6....30 VDC | 24....280 VAC | SPST-NO | Zero Cross | 2.5 |
| 70S2-04-B-06-L | 3....30 VDC | 24....140 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-05-B-06-L | 6....30 VDC | 24....140 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-04-C-06-L | 3....30 VDC | 24....280 VAC | SPST-NO | Zero Cross | 6 |
| 70S2-05-C-06-L | 6....30 VDC | 24....280 VAC | SPST-NO | Zero Cross | 6 |

Part Number Builder

| Series | Input Voltage | Output Voltage | Output Current | Package Style |
|--------|--|-------------------|----------------|---------------|
| 70S2 | 01 = 3 to 15 VDC, DC/DC RELAYS | A = 3 to 60 VDC | 02 = 2.5 AMPS | V = V STYLE |
| | 02 = 9 to 30 VDC, DC/DC RELAYS | B = 24 to 140 VAC | 03 = 3 AMPS | N = N STYLE |
| | 03 = 3 to 30 VDC, 25 A S PACK | C = 24 to 280 VAC | 04 = 4 AMPS | S = S STYLE |
| | 04 = 3 to 30 VDC (OR 32 VDC), DC/AC RELAYS | D = 8 to 50 VAC | 05 = 5 AMPS | F = F STYLE |
| | 05 = 6 to 30 VDC (OR 32 VDC), DC/AC RELAYS | | 06 = 6 AMPS | M = M STYLE |
| | | | 10 = 10 AMPS | H = H STYLE |
| | | | 12 = 12 AMPS | L = L STYLE |
| | | | 25 = 25 AMPS | K = K STYLE |

70S2 Series Solid State Relays/K Style



UL US
UL Recognized
File No. E258297



General Specifications (@ 25° C) (UL 508)

| Output Characteristics | | Units | 70S2-04-B | 70S2-04-C |
|--|----------------------|------------------|--------------|--------------|
| Number and type of Contacts | | | SPST-NO | SPST-NO |
| Switching Device | | | Triac | Triac |
| Current Rating | | A | 4 | 4 |
| Switching voltage | | V | 24....140 AC | 24....280 AC |
| Switching Type | | | Zero Cross | Zero Cross |
| Maximum Rate of Rise Off State Voltage (dv/dt) | | V/us | 300 | 300 |
| Min. Load current to maintain on | | mA | 75 | 75 |
| Non-Repetitive Surge Current (1 cycle) | | A | 60 | 60 |
| Max. Off state leakage current (rms) | | mA | 6 | 6 |
| Typical On State Voltage Drop (rms) | | V | 1.6 | 1.6 |
| Minimum Peak Blocking Voltage | | V | 400 AC | 600 AC |
| Input Characteristics | | | | |
| Voltage Range | | V | 3....30 DC | 3....30 DC |
| Must Release Voltage | | V | 1 DC | 1 DC |
| Typical Input Current @ 5VDC or 240VAC | | mA | 1....17 | 1....6 |
| Max. Reverse Control Voltage | | V | 5 DC | 5 DC |
| Performance Characteristics | | | | |
| Operating time (response time) | On | ms | 8.3 | 8.3 |
| | Off | ms | 8.3 | 8.3 |
| Dielectric strength | Terminals to Chassis | V | 3000 AC | 3000 AC |
| | Input to Output | V | 3000 AC | 3000 AC |
| Environment | | | | |
| Product certifications | | Standard version | UR, CSA | UR, CSA |
| Ambient air temperature around the device | Storage | °C | -40...+125 | -40...+125 |
| | Operation | °C | -40...+100 | -40...+100 |
| Miscellaneous Characteristics | | | | |
| Thermal Resistance (Junction to Case) | | °C/W | 1.5 | 1.5 |
| Weight | | g (oz) | 40 (1.4) | 40 (1.4) |

Maximum Continuous Current vs. Ambient Temperature





70S2 K Relay with the 70-459-1 Socket



70S2 K

| 70S2-04-D | 70S2-05-B | 70S2-05-C | 70S2-05-D | 70S2-01-A | 70S2-02-A |
|------------|--------------|--------------|------------|--------------|--------------|
| SPST-NO | SPST-NO | SPST-NO | SPST-NO | SPST-NO | SPST-NO |
| Triac | Triac | Triac | Triac | MOSFET | MOSFET |
| 4 | 4 | 4 | 4 | 3 | 3 |
| 8....50 AC | 24....140 AC | 24....280 AC | 8....50 AC | 3....60 DC | 3....60 DC |
| Zero Cross | Zero Cross | Zero Cross | Zero Cross | DC Switching | DC Switching |
| 300 | 300 | 300 | 300 | N/A | N/A |
| 75 | 75 | 75 | 75 | 100 | 100 |
| 60 | 60 | 60 | 60 | 7 (1 SEC) | 7 (1 SEC) |
| 3 | 6 | 6 | 6 | 10 μ A | 10 μ A |
| 1.6 | 1.6 | 1.6 | 1.6 | 1.2 | 1.2 |
| 200 AC | 400 AC | 600 AC | 200 AC | 105 DC | 105 DC |
| 3....30 DC | 6....30 DC | 6....30 DC | 6....30 DC | 3....15 | 9....30 |
| 1 DC | 1 DC | 1 DC | 1 DC | 1 DC | 1 DC |
| 1....17 | 1....6 | 1....17 | 1....6 | 5....40 | 5....17 |
| 5 DC | 5 DC | 5 DC | 5 DC | 5 DC | 5 DC |
| 8.3 | 8.3 | 8.3 | 8.3 | 75 μ s | 75 μ s |
| 8.3 | 8.3 | 8.3 | 8.3 | 500 μ s | 500 μ s |
| 3000 AC | 3000 AC | 3000 AC | 3000 AC | 3000 AC | 3000 AC |
| 3000 AC | 3000 AC | 3000 AC | 3000 AC | 3000 AC | 3000 AC |
| UR, CSA | UR, CSA | UR, CSA | UR, CSA | UR, CSA | UR, CSA |
| -40...+125 | -40...+125 | -40...+125 | -40...+125 | -40...+125 | -40...+125 |
| -40...+100 | -40...+100 | -40...+100 | -40...+100 | -40...+100 | -40...+100 |
| 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| 40 (1.4) | 40 (1.4) | 40 (1.4) | 40 (1.4) | 40 (1.4) | 40 (1.4) |

70S2 Series Solid State Relays/K Style *continued*



SECTION 4





70S2 K Relay with the 70-459-1 Socket



70S2 K

Standard Part Numbers

BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

| DC Operated | Input Voltage Range | Output Voltage Range | Contact Configuration | Switching Type | Rated Current Load (Amps) |
|-----------------------|---------------------|----------------------|-----------------------|----------------|---------------------------|
| 70S2-04-B-04-K | 3....30 VDC | 24....140 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-04-C-04-K | 3....30 VDC | 24....280 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-04-D-04-K | 3....30 VDC | 8....50 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-05-B-04-K | 6....30 VDC | 24....140 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-05-C-04-K | 6....30 VDC | 24....280 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-05-D-04-K | 6....30 VDC | 8....50 VAC | SPST-NO | Zero Cross | 4 |
| 70S2-01-A-03-K | 3....15 VDC | 3....60 VDC | SPST-NO | DC Switching | 3 |
| 70S2-02-A-03-K | 9....30 VDC | 3....60 VDC | SPST-NO | DC Switching | 3 |

Part Number Builder

| Series | Input Voltage | Output Voltage | Output Current | Package Style |
|--------|--|-------------------|----------------|---------------|
| 70S2 | 01 = 3 to 15 VDC, DC/DC RELAYS | A = 3 to 60 VDC | 02 = 2.5 AMPS | V = V STYLE |
| | 02 = 9 to 30 VDC, DC/DC RELAYS | B = 24 to 140 VAC | 03 = 3 AMPS | N = N STYLE |
| | 03 = 3 to 30 VDC, 25 A S PACK | C = 24 to 280 VAC | 04 = 4 AMPS | S = S STYLE |
| | 04 = 3 to 30 VDC (OR 32 VDC), DC/AC RELAYS | D = 8 to 50 VAC | 05 = 5 AMPS | F = F STYLE |
| | 05 = 6 to 30 VDC (OR 32 VDC), DC/AC RELAYS | | 06 = 6 AMPS | M = M STYLE |
| | | | 10 = 10 AMPS | H = H STYLE |
| | | | 12 = 12 AMPS | L = L STYLE |
| | | | 25 = 25 AMPS | K = K STYLE |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.