

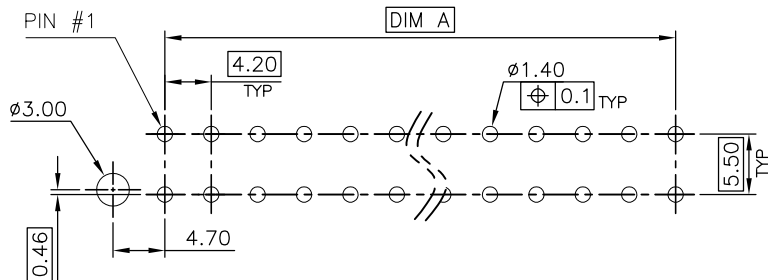
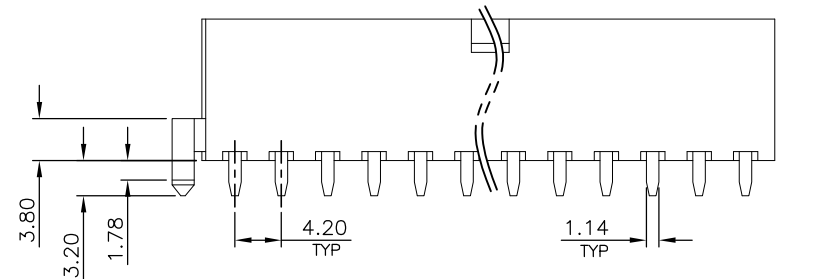


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	G	REVISED PER ECR-17-003534	13MAR2017	D.S	S.Y	

- NOTE:
- MATERIAL:
HOUSING: PA9T, UL94 V-0, COLOR: (SEE TABLE).
CONTACTS: BRASS.
 - FINISH:
CONTACTS: 3.05um [120u"] MIN. MATTE-TIN.
1.27um [50u"] MIN. NICKEL UNDERPLATED ALL OVER.
 - WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC.
109-202, CONDITION B.
 - NO TE LOGO AND DATE CODE ON THE PRODUCT WITH 4 POS.
 - THE KEY IDENTIFIED WAS SHOWN ON PAGE 5.

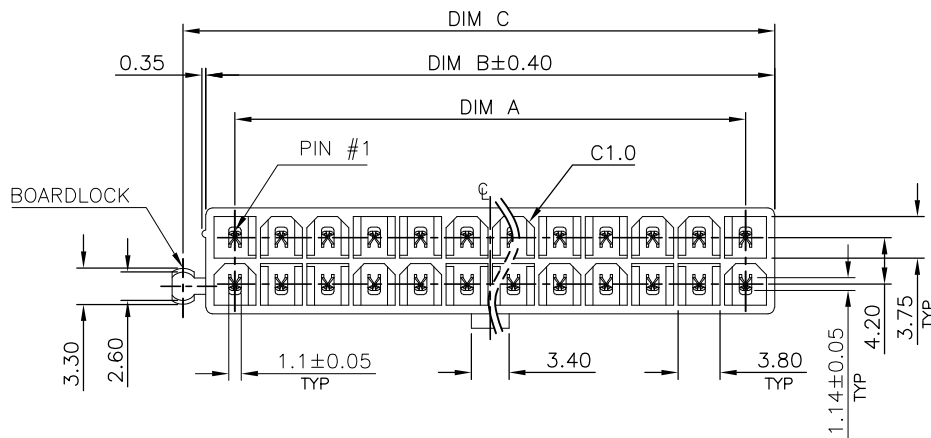

RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05 T=1.6mm

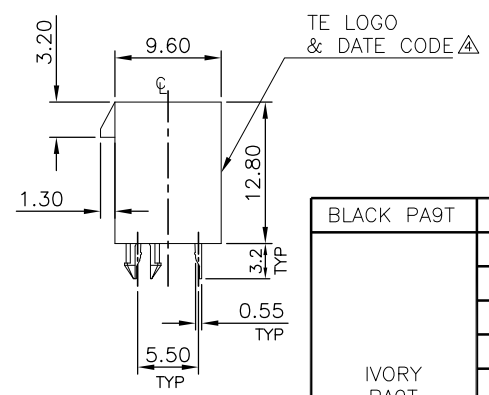

ONE BOARDLOCK
(LEFT)

HSG COLOR & MATERIAL	WEIGHT	DIM A	DIM B	DIM C	POS.	PART NUMBER
BLACK PA9T	1.52	8.4	13.7	15.75	6	6-1775099-6
IVORY PA9T	5.40	46.2	51.5	53.55	24	1-1775099-3
	1.13	4.2	9.5	11.55	4	1-1775099-2
	4.30	37.8	43.1	45.15	20	1-1775099-1
	3.90	33.6	38.9	40.95	18	1-1775099-0
	3.11	25.2	30.5	32.55	14	1775099-9
	2.71	21.0	26.3	28.35	12	1775099-8
	2.31	16.8	22.1	24.15	10	1775099-7
	1.52	8.4	13.7	15.75	6	1775099-6
1.92	12.6	17.9	19.95	8	1775099-5	
IVORY PA9T	5.40	46.2	51.5	53.55	24	1775099-4
1.13	4.2	9.5	11.55	4	1775099-3	
TRANSPARENCY PA9T	5.40	46.2	51.5	53.55	24	1775099-2
1.13	4.2	9.5	11.55	4	1775099-1	




SUPERSEDED TO 1-1775099-3
 SUPERSEDED TO 1-1775099-2

THIS DRAWING IS A CONTROLLED DOCUMENT.


DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN B. HSING 15JUL2009	TE Connectivity
	0 PLC ±	CHK S. CHIEN 15JUL2009	
MATERIAL SEE NOTE	FINISH SEE NOTE	APVD W. KODAMA 15JUL2009	NAME
		PRODUCT SPEC 108-57560	ATX POWER CONNECTOR 4.2mm PITCH, VERTICAL, DIP TYPE
		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO
		WEIGHT SEE TABLE	A3 00779 C=1775099
		CUSTOMER DRAWING	RESTRICTED TO
		SCALE	SHEET 1 of 6 REV G

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1.			

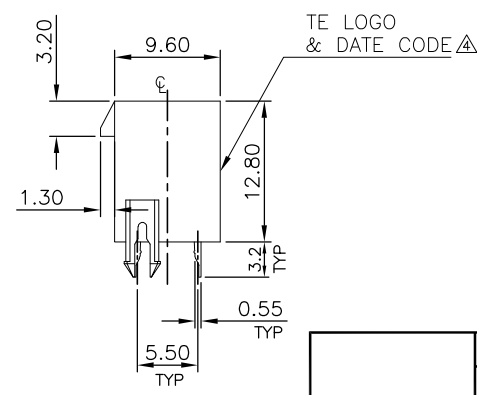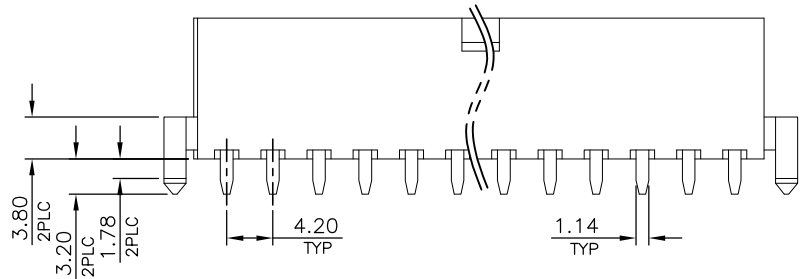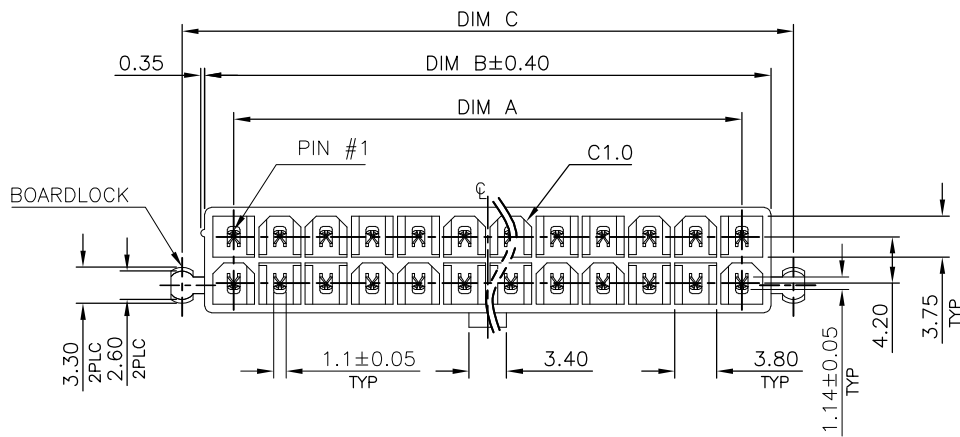

TWO BOARDLOCK

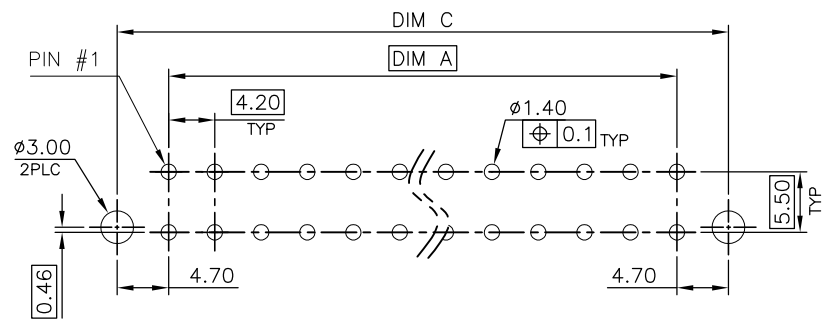

RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05 T=1.6mm

- NOTE:
- MATERIAL:
HOUSING: PA9T, UL94 V-0, COLOR: (SEE TABLE).
CONTACTS: BRASS.
 - FINISH:
CONTACTS: 3.05um [120u"] MIN. MATTE-TIN.
1.27um [50u"] MIN. NICKEL UNDERPLATED ALL OVER.
 - WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC.
109-202, CONDITION B.
 - NO TE LOGO AND DATE CODE ON THE PRODUCT WITH 4 POS.
 - THE KEY IDENTIFIED WAS SHOWN ON PAGE 5.


IVORY PA9T	3.54	29.4	34.7	38.8	16	2-1775099-9
	5.43	46.2	51.5	55.6	24	2-1775099-8
	4.33	37.8	43.1	47.2	20	2-1775099-7
	3.93	33.6	38.9	43.0	18	2-1775099-6
	3.14	25.2	30.5	34.6	14	2-1775099-5
	2.74	21.0	26.3	30.4	12	2-1775099-4
	2.34	16.8	22.1	26.2	10	2-1775099-3
	1.95	12.6	17.9	22.0	8	2-1775099-2
	1.55	8.4	13.7	17.8	6	2-1775099-1
	1.16	4.2	9.5	13.6	4	2-1775099-0
HSG COLOR & MATERIAL	WEIGHT	DIM A	DIM B	DIM C	POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN		TE Connectivity	
	0 PLC ±	CHK	NAME		
	1 PLC ±0.3	APVD	ATX POWER CONNECTOR		
	2 PLC ±0.2	PRODUCT SPEC	4.2mm PITCH, VERTICAL, DIP TYPE		
	3 PLC ±0.15	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
	4 PLC ±	WEIGHT	A3	00779	C=1775099
	ANGLES ±3°	CUSTOMER DRAWING	SCALE	SHEET	REV
MATERIAL	FINISH			2 OF 6	G




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
		SEE SHEET 1.					

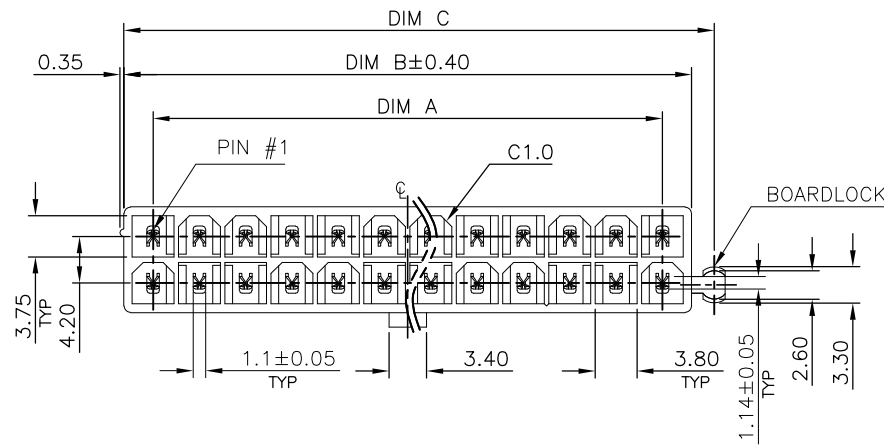

- NOTE:
- MATERIAL:
HOUSING: PA9T, UL94 V-0, COLOR: (SEE TABLE).
CONTACTS: BRASS.
 - FINISH:
CONTACTS: 3.05um [120u"] MIN. MATTE-TIN.
1.27um [50u"] MIN. NICKEL UNDERPLATED ALL OVER.
 - WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC.
109-202, CONDITION B.
 - NO TE LOGO AND DATE CODE ON THE PRODUCT WITH 4 POS.
 - THE KEY IDENTIFIED WAS SHOWN ON PAGE 5.

ONE BOARDLOCK (RIGHT)

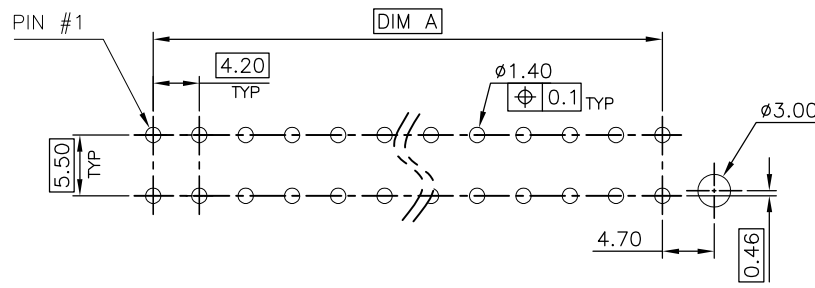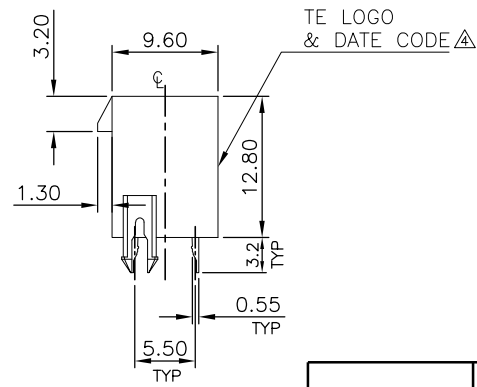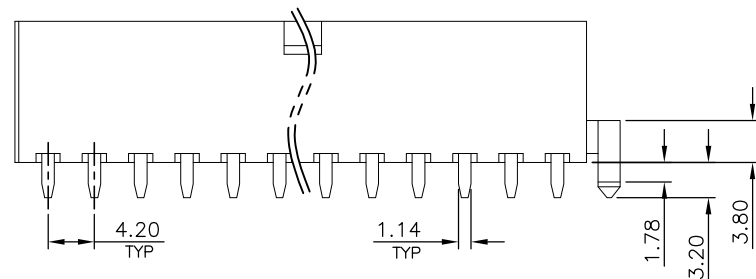

RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05 T=1.6mm

IVORY PA9T	5.40	46.2	51.5	53.55	24	3-1775099-8
	4.30	37.8	43.1	45.15	20	3-1775099-7
	3.90	33.6	38.9	40.95	18	3-1775099-6
	3.11	25.2	30.5	32.55	14	3-1775099-5
	2.71	21.0	26.3	28.35	12	3-1775099-4
	2.31	16.8	22.1	24.15	10	3-1775099-3
	1.92	12.6	17.9	19.95	8	3-1775099-2
	1.52	8.4	13.7	15.75	6	3-1775099-1
1.13	4.2	9.5	11.55	4	3-1775099-0	
HSG COLOR & MATERIAL	WEIGHT	DIM A	DIM B	DIM C	POS.	PART NUMBER




THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	TE Connectivity		
mm		CHK	NAME		
	0 PLC ± -	APVD	ATX POWER CONNECTOR		
	1 PLC ± 0.3	PRODUCT SPEC	4.2mm PITCH, VERTICAL, DIP TYPE		
	2 PLC ± 0.2	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
	3 PLC ± 0.15	WEIGHT	A3	00779	C-1775099
	4 PLC ANGLES ± 3'	CUSTOMER DRAWING	SCALE		SHEET 3 OF 6
MATERIAL	FINISH	RESTRICTED TO		REV	G

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
DW		SEE SHEET 1.				

- NOTE:
- MATERIAL:
HOUSING: PA9T, UL94 V-0, COLOR: (SEE TABLE).
CONTACTS: BRASS.
 - FINISH:
CONTACTS: 3.05um [120u"] MIN. MATTE-TIN.
1.27um [50u"] MIN. NICKEL UNDERPLATED ALL OVER.
 - WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC.
109-202, CONDITION B.
 - NO TE LOGO AND DATE CODE ON THE PRODUCT WITH 4 POS.
 - THE KEY IDENTIFIED WAS SHOWN ON PAGE 5.

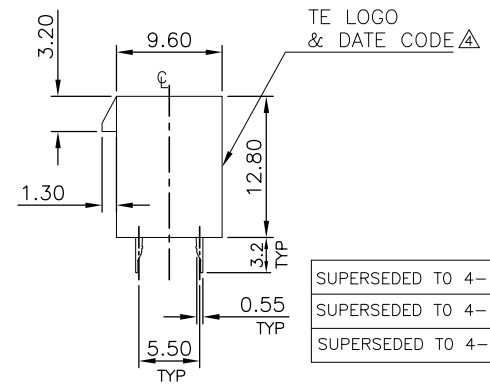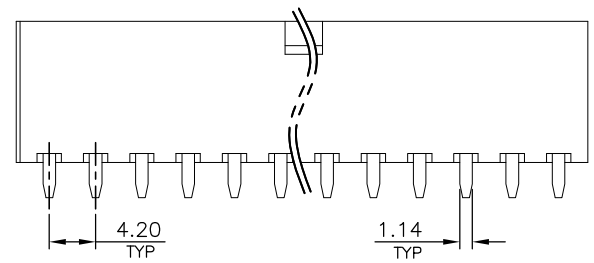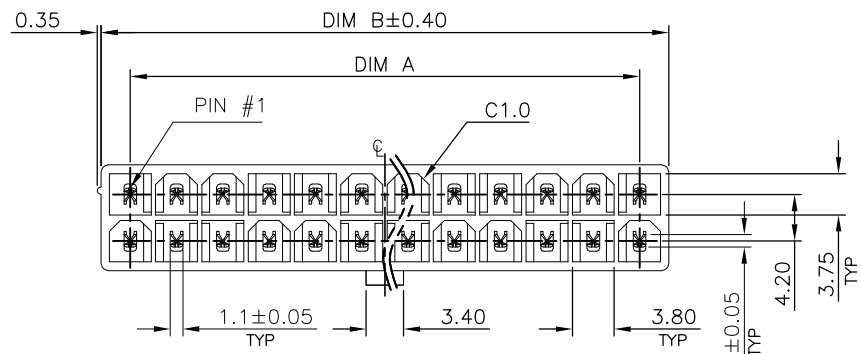

NO BOARDLOCK

SUPERSEDED TO	IVORY PA9T	2.28	16.8	22.1	10	5-1775099-3
4-1775099-3		1.89	12.6	17.9	8	5-1775099-2
4-1775099-2		1.49	8.4	13.7	6	5-1775099-1
4-1775099-1		5.37	46.2	51.5	24	4-1775099-8
		4.27	37.8	43.1	20	4-1775099-7
		3.87	33.6	38.9	18	4-1775099-6
		3.08	25.2	30.5	14	4-1775099-5
		2.68	21.0	26.3	12	4-1775099-4
		2.28	16.8	22.1	10	4-1775099-3
		1.89	12.6	17.9	8	4-1775099-2
		1.49	8.4	13.7	6	4-1775099-1
		1.10	4.2	9.5	4	4-1775099-0
	HSG COLOR & MATERIAL	WEIGHT	DIM A	DIM B	POS.	PART NUMBER

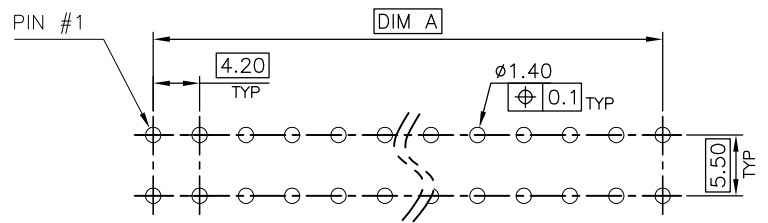


RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05 T=1.6mm


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	TE Connectivity		
mm		CHK	NAME		
0 PLC ±	±	APVD	ATX POWER CONNECTOR		
1 PLC ±0.3	±0.3	PRODUCT SPEC	4.2mm PITCH, VERTICAL, DIP TYPE		
2 PLC ±0.2	±0.2	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO
3 PLC ±0.15	±0.15	WEIGHT	A3	00779	C-1775099
4 PLC ANGLES ±3'	±3'	CUSTOMER DRAWING	RESTRICTED TO		
MATERIAL	FINISH	SCALE	SHEET 4 of 6		REV G


LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			




4 POS

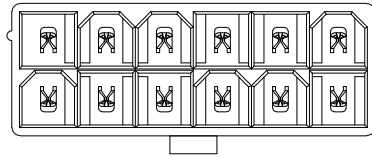


12 POS

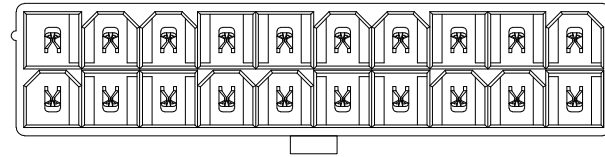


20 POS




6 POS

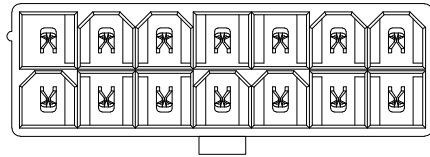


14 POS

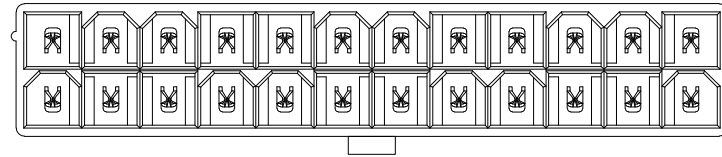


24 POS




8 POS

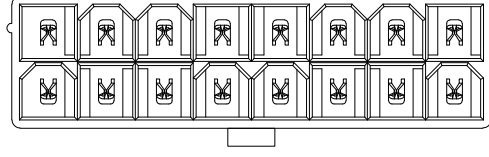

16 POS



10 POS

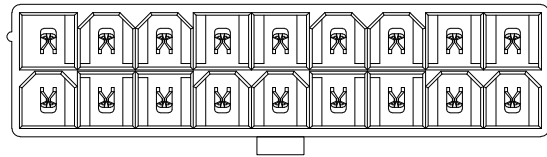

18 POS

KEY POSITION IDENTIFIED
(TOP VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity		
DIMENSIONS: mm		CHK	NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	ATX POWER CONNECTOR 4.2mm PITCH, VERTICAL, DIP TYPE		
0 PLC ± -		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
1 PLC ± 0.3		APPLICATION SPEC	A3	00779	C=1775099
2 PLC ± 0.2		WEIGHT	RESTRICTED TO		
3 PLC ± 0.15		CUSTOMER DRAWING	SCALE	SHEET	REV
4 PLC ± -				5 of 6	G
ANGLES ± 3'					
FINISH					

4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2010 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS					
P	LTR	DESCRIPTION			DATE	DWN	APVD		
		SEE SHEET 1.							

D
C
B
A

D
C
B
A

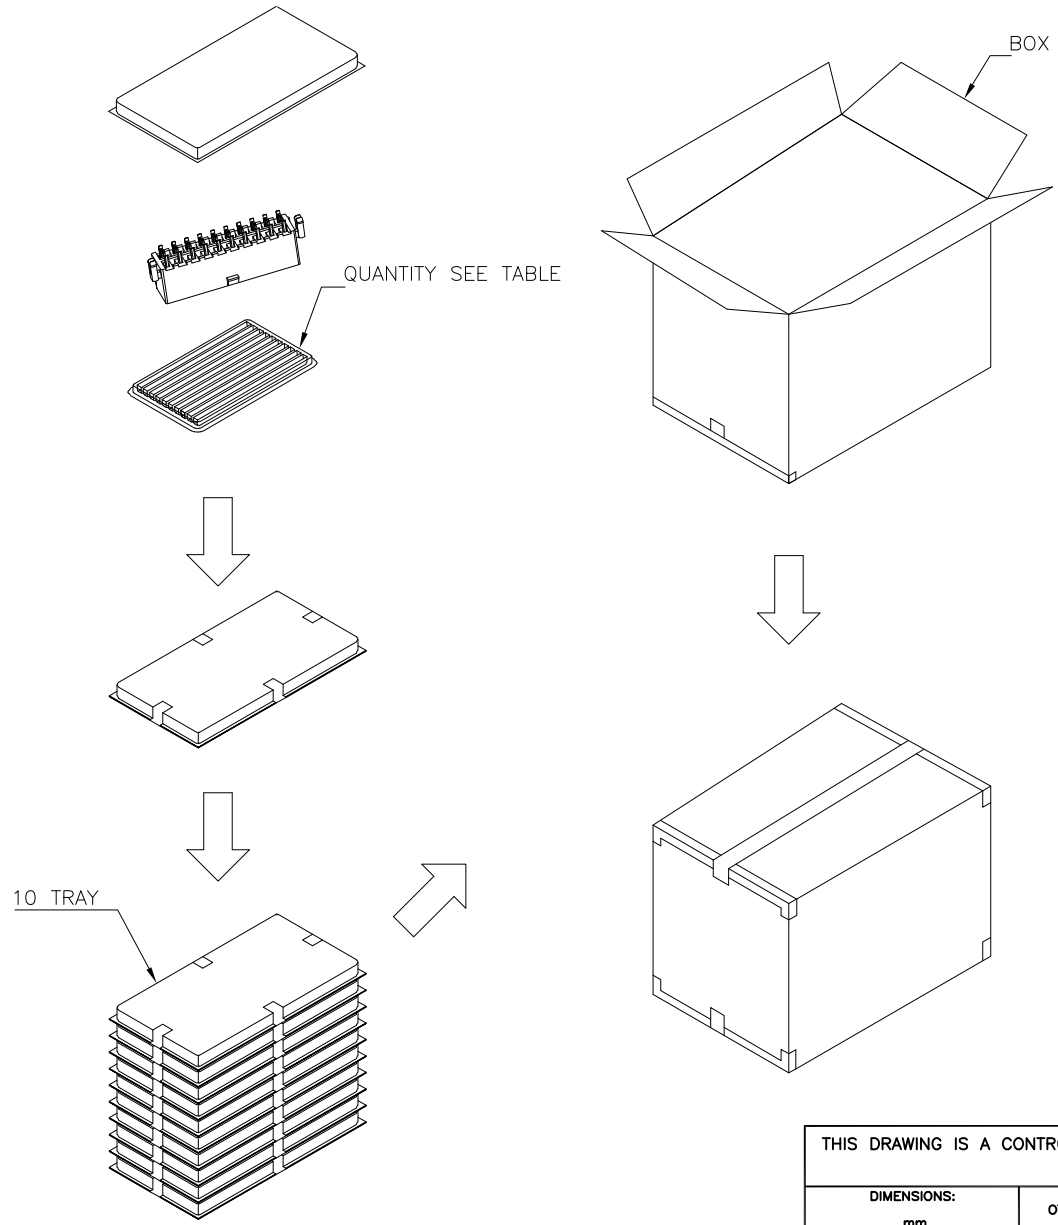

- NOTES:
 1. TRAY : PVC, SIZE: 330mm(L)X 265mm(W)X 22mm(H).
 2. BOX : CORRUGATED, SIZE: 350mm(L)X 279mm(W)X 195mm(H).
 3. QUANTITY: SEE TABLE.

POS.	NO. OF BOARDLOCK	PCS /TRAY	TRAYS /BOX	PCS /BOX	NET WEIGHT	GROSS WEIGHT
2		80	10	800	5.94	5.94
2		100	10	1000	5.93	5.93
2		100	10	1000	5.53	5.53
2		120	10	1200	5.85	5.85
2		140	10	1400	6.00	6.00
2		160	10	1600	5.98	5.98
2		180	10	1800	5.81	5.81
2		220	10	2200	5.89	5.89
2		280	10	2800	5.94	5.94
2		360	10	3600	5.78	5.78
2		80	10	800	5.92	5.92
2		100	10	1000	5.90	5.90
2		120	10	1200	6.28	6.28
2		140	10	1400	5.95	5.95
2		160	10	1600	5.94	5.94
2		200	10	2000	6.22	6.22
2		240	10	2400	6.21	6.21
2		300	10	3000	6.16	6.16
2		420	10	4200	6.35	6.35
2		80	10	800	5.90	5.90
2		100	10	1000	5.87	5.87
2		120	10	1200	6.24	6.24
2		140	10	1400	5.91	5.91
2		180	10	1800	6.42	6.42
2		200	10	2000	6.16	6.16
2		260	10	2600	6.51	6.51
2		340	10	3400	6.67	6.67
2		480	10	4800	6.88	6.88
POS.	NO. OF BOARDLOCK	PCS /TRAY	TRAYS /BOX	PCS /BOX	NET WEIGHT	GROSS WEIGHT
1		80	10	800	5.94	5.94
1		100	10	1000	5.93	5.93
1		100	10	1000	5.53	5.53
1		120	10	1200	5.85	5.85
1		140	10	1400	6.00	6.00
1		160	10	1600	5.98	5.98
1		180	10	1800	5.81	5.81
1		220	10	2200	5.89	5.89
1		280	10	2800	5.94	5.94
1		360	10	3600	5.78	5.78
1		80	10	800	5.92	5.92
1		100	10	1000	5.90	5.90
1		120	10	1200	6.28	6.28
1		140	10	1400	5.95	5.95
1		160	10	1600	5.94	5.94
1		200	10	2000	6.22	6.22
1		240	10	2400	6.21	6.21
1		300	10	3000	6.16	6.16
1		420	10	4200	6.35	6.35
1		80	10	800	5.90	5.90
1		100	10	1000	5.87	5.87
1		120	10	1200	6.24	6.24
1		140	10	1400	5.91	5.91
1		180	10	1800	6.42	6.42
1		200	10	2000	6.16	6.16
1		260	10	2600	6.51	6.51
1		340	10	3400	6.67	6.67
1		480	10	4800	6.88	6.88

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	DWN	TE Connectivity		
MATERIAL	FINISH	CHK	NAME		
		APVD	ATX POWER CONNECTOR 4.2mm PITCH, VERTICAL, DIP TYPE		
		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
		APPLICATION SPEC	A3	00779	C=1775099
		WEIGHT	RESTRICTED TO		
		CUSTOMER DRAWING	SCALE	SHEET	REV
				6 OF 6	G



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.