

# SMQ Series

- Downsized from current downsized snap-ins SMH series
- Endurance with ripple current : 2,000 hours at 85°C
- Non solvent-proof type
- RoHS Compliant

SMQ

↑  
Downsized  
SMH




## ◆ SPECIFICATIONS


Items	Characteristics			
Category	-25 to +85°C			
Temperature Range	-25 to +85°C			
Rated Voltage Range	160 to 450V <sub>dc</sub>			
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)			
Leakage Current	I ≤ 3·C/V Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 5 minutes)			
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	160 to 250V	315 to 400V	420 & 450V
	tanδ (Max.)	0.15	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	160 to 250V	315 to 400V	420 & 450V
	Z(-25°C)/Z(+20°C)	4	8	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2,000 hours at 85°C.			
	Capacitance change	≤ ±20% of the initial value		
	D.F. (tanδ)	≤ 200% of the initial specified value		
	Leakage current	≤ The initial specified value		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.			
	Capacitance change	≤ ±15% of the initial value		
	D.F. (tanδ)	≤ 150% of the initial specified value		
	Leakage current	≤ The initial specified value		

## ◆ DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

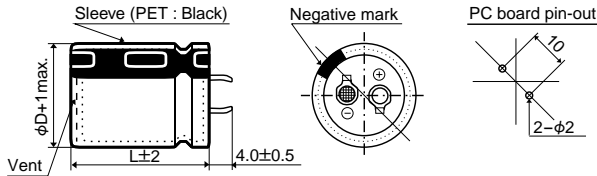


● Terminal Code : LI (φ35)

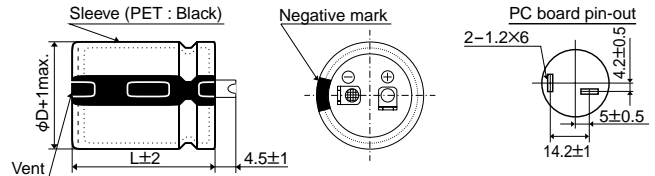

No plastic disk is the standard design.

## ◆ PART NUMBERING SYSTEM

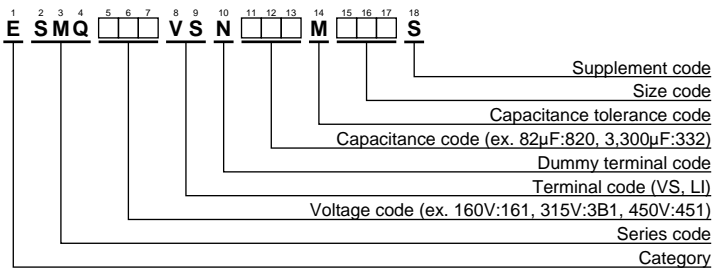

Please refer to "A guide to global code (snap-in type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.
160	560	22×25	0.15	2.25	ESMQ161VSN561MP25S
	680	22×30	0.15	2.50	ESMQ161VSN681MP30S
	820	22×35	0.15	2.75	ESMQ161VSN821MP35S
	1,000	22×40	0.15	3.00	ESMQ161VSN102MP40S
	1,000	25.4×30	0.15	3.00	ESMQ161VSN102MQ30S
	1,200	22×45	0.15	3.25	ESMQ161VSN122MP45S
	1,200	25.4×35	0.15	3.25	ESMQ161VSN122MQ35S
	1,200	30×25	0.15	3.25	ESMQ161VSN122MR25S
	1,500	22×50	0.15	3.73	ESMQ161VSN152MP50S
	1,500	25.4×40	0.15	3.73	ESMQ161VSN152MQ40S
	1,500	30×30	0.15	3.73	ESMQ161VSN152MR30S
	1,500	35×25	0.15	3.73	ESMQ161VSN152MA25S
	1,800	25.4×45	0.15	4.20	ESMQ161VSN182MP45S
	1,800	30×35	0.15	4.20	ESMQ161VSN182MR35S
	1,800	35×30	0.15	4.20	ESMQ161VSN182MA30S
	2,200	30×40	0.15	4.78	ESMQ161VSN222MR40S
	2,200	35×35	0.15	4.78	ESMQ161VSN222MA35S
	2,700	35×40	0.15	5.45	ESMQ161VSN272MA40S
	3,300	35×45	0.15	5.75	ESMQ161VSN332MA45S
	3,900	35×50	0.15	6.00	ESMQ161VSN392MA50S
180	470	22×25	0.15	2.08	ESMQ181VSN471MP25S
	560	22×30	0.15	2.25	ESMQ181VSN561MP30S
	680	22×30	0.15	2.50	ESMQ181VSN681MP30S
	680	25.4×25	0.15	2.50	ESMQ181VSN681MQ25S
	820	22×35	0.15	2.75	ESMQ181VSN821MP35S
	820	25.4×30	0.15	2.75	ESMQ181VSN821MQ30S
	1,000	22×45	0.15	3.00	ESMQ181VSN102MP45S
	1,000	25.4×35	0.15	3.00	ESMQ181VSN102MQ35S
	1,000	30×25	0.15	3.00	ESMQ181VSN102MR25S
	1,200	22×50	0.15	3.31	ESMQ181VSN122MP50S
	1,200	25.4×40	0.15	3.31	ESMQ181VSN122MQ40S
	1,200	30×30	0.15	3.31	ESMQ181VSN122MR30S
	1,200	35×25	0.15	3.31	ESMQ181VSN122MA25S
	1,500	25.4×45	0.15	3.83	ESMQ181VSN152MP45S
	1,500	30×35	0.15	3.83	ESMQ181VSN152MR35S
	1,500	35×30	0.15	3.83	ESMQ181VSN152MA30S
	1,800	25.4×50	0.15	4.32	ESMQ181VSN182MQ50S
	1,800	30×40	0.15	4.32	ESMQ181VSN182MR40S
	1,800	35×30	0.15	4.32	ESMQ181VSN182MA30S
	2,200	30×45	0.15	4.92	ESMQ181VSN222MR45S
2,200	35×40	0.15	4.92	ESMQ181VSN222MA40S	
2,700	35×45	0.15	5.52	ESMQ181VSN272MA45S	
3,300	35×50	0.15	5.75	ESMQ181VSN332MA50S	
200	390	22×25	0.15	1.68	ESMQ201VSN391MP25S
	470	22×30	0.15	1.85	ESMQ201VSN471MP30S
	560	22×30	0.15	2.43	ESMQ201VSN561MP30S
	560	25.4×25	0.15	2.43	ESMQ201VSN561MQ25S
	680	22×35	0.15	2.68	ESMQ201VSN681MP35S
	680	25.4×30	0.15	2.68	ESMQ201VSN681MQ30S
	820	22×40	0.15	2.93	ESMQ201VSN821MP40S
	820	25.4×30	0.15	2.93	ESMQ201VSN821MQ30S
	820	30×25	0.15	2.93	ESMQ201VSN821MR25S
	1,000	22×45	0.15	3.25	ESMQ201VSN102MP45S
	1,000	25.4×35	0.15	3.25	ESMQ201VSN102MQ35S
	1,000	30×30	0.15	3.25	ESMQ201VSN102MR30S
	1,000	35×25	0.15	3.25	ESMQ201VSN102MA25S
	1,200	25.4×40	0.15	3.50	ESMQ201VSN122MQ40S
	1,200	30×30	0.15	3.50	ESMQ201VSN122MR30S
	1,200	35×30	0.15	3.50	ESMQ201VSN122MA30S
	1,500	25.4×50	0.15	3.87	ESMQ201VSN152MQ50S
	1,500	30×35	0.15	3.87	ESMQ201VSN152MR35S
	1,500	35×30	0.15	3.87	ESMQ201VSN152MA30S
	1,800	30×45	0.15	4.32	ESMQ201VSN182MR45S
1,800	35×35	0.15	4.32	ESMQ201VSN182MA35S	
2,200	30×50	0.15	4.92	ESMQ201VSN222MR50S	
2,200	35×40	0.15	4.92	ESMQ201VSN222MA40S	
2,700	35×50	0.15	5.45	ESMQ201VSN272MA50S	

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.
250	270	22×25	0.15	1.31	ESMQ251VSN271MP25S
	330	22×30	0.15	1.75	ESMQ251VSN331MP30S
	390	22×30	0.15	1.91	ESMQ251VSN391MP30S
	390	25.4×25	0.15	1.91	ESMQ251VSN391MQ25S
	470	22×35	0.15	2.11	ESMQ251VSN471MP35S
	470	25.4×30	0.15	2.11	ESMQ251VSN471MQ30S
	560	22×40	0.15	2.25	ESMQ251VSN561MP40S
	560	25.4×30	0.15	2.25	ESMQ251VSN561MQ30S
	560	30×25	0.15	2.25	ESMQ251VSN561MR25S
	680	22×45	0.15	2.50	ESMQ251VSN681MP45S
	680	25.4×35	0.15	2.50	ESMQ251VSN681MQ35S
	680	30×30	0.15	2.50	ESMQ251VSN681MR30S
	820	22×50	0.15	2.77	ESMQ251VSN821MP50S
	820	25.4×40	0.15	2.77	ESMQ251VSN821MQ40S
	820	30×30	0.15	2.77	ESMQ251VSN821MR30S
	820	35×25	0.15	2.77	ESMQ251VSN821MA25S
	1,000	25.4×45	0.15	3.32	ESMQ251VSN102MQ45S
	1,000	30×35	0.15	3.32	ESMQ251VSN102MR35S
	1,000	35×30	0.15	3.32	ESMQ251VSN102MA30S
	1,200	30×40	0.15	3.53	ESMQ251VSN122MR40S
1,200	35×35	0.15	3.53	ESMQ251VSN122MA35S	
1,500	30×50	0.15	4.04	ESMQ251VSN152MR50S	
1,500	35×40	0.15	4.04	ESMQ251VSN152MA40S	
1,800	35×45	0.15	4.55	ESMQ251VSN182MA45S	
315	180	22×25	0.15	1.21	ESMQ315VSN181MP25S
	220	22×30	0.15	1.41	ESMQ315VSN221MP30S
	270	22×30	0.15	1.60	ESMQ315VSN271MP30S
	330	22×40	0.15	1.82	ESMQ315VSN331MP40S
	330	25.4×30	0.15	1.82	ESMQ315VSN331MQ30S
	330	30×25	0.15	1.82	ESMQ315VSN331MR25S
	390	22×45	0.15	2.01	ESMQ315VSN391MP45S
	390	25.4×35	0.15	2.01	ESMQ315VSN391MQ35S
	390	30×30	0.15	2.01	ESMQ315VSN391MR30S
	470	22×50	0.15	2.27	ESMQ315VSN471MP50S
	470	25.4×40	0.15	2.27	ESMQ315VSN471MQ40S
	470	30×30	0.15	2.27	ESMQ315VSN471MR30S
	470	35×25	0.15	2.27	ESMQ315VSN471MA25S
	560	25.4×45	0.15	2.56	ESMQ315VSN561MQ45S
	560	30×35	0.15	2.56	ESMQ315VSN561MR35S
	560	35×30	0.15	2.56	ESMQ315VSN561MA30S
	680	30×40	0.15	2.87	ESMQ315VSN681MR40S
	680	35×35	0.15	2.87	ESMQ315VSN681MA35S
	820	30×45	0.15	3.25	ESMQ315VSN821MR45S
	820	35×40	0.15	3.25	ESMQ315VSN821MA40S
1,000	30×50	0.15	3.63	ESMQ315VSN102MR50S	
1,000	35×45	0.15	3.63	ESMQ315VSN102MA45S	
350	150	22×25	0.15	1.12	ESMQ351VSN151MP25S
	180	22×30	0.15	1.22	ESMQ351VSN181MP30S
	220	22×35	0.15	1.44	ESMQ351VSN221MP35S
	270	22×40	0.15	1.66	ESMQ351VSN271MP40S
	270	25.4×30	0.15	1.66	ESMQ351VSN271MQ30S
	330	22×45	0.15	1.88	ESMQ351VSN331MP45S
	330	25.4×35	0.15	1.88	ESMQ351VSN331MQ35S
	390	22×50	0.15	2.06	ESMQ351VSN391MP50S
	390	25.4×40	0.15	2.06	ESMQ351VSN391MQ40S
	390	30×30	0.15	2.06	ESMQ351VSN391MR30S
	390	35×25	0.15	2.06	ESMQ351VSN391MA25S
	470	25.4×45	0.15	2.40	ESMQ351VSN471MQ45S
	470	30×35	0.15	2.40	ESMQ351VSN471MR35S
	470	35×30	0.15	2.40	ESMQ351VSN471MA30S
	560	25.4×50	0.15	2.60	ESMQ351VSN561MQ50S
	560	30×40	0.15	2.60	ESMQ351VSN561MR40S
	560	35×30	0.15	2.60	ESMQ351VSN561MA30S
	680	30×45	0.15	2.96	ESMQ351VSN681MR45S
	680	35×35	0.15	2.96	ESMQ351VSN681MA35S
	820	30×50	0.15	3.25	ESMQ351VSN821MR50S
820	35×45	0.15	3.25	ESMQ351VSN821MA45S	

## ◆STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	WV (V <sub>dc</sub> )	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (Arms/85°C,120Hz)	Part No.	
350	1,000	35×50	0.15	3.54	ESMQ351VSN102MA50S	420	270	30×30	0.20	1.94	ESMQ421VSN271MR30S	
400	120	22×25	0.15	1.02	ESMQ401VSN121MP25S		330	25.4×45	0.20	2.17	ESMQ421VSN331MQ45S	
	150	22×30	0.15	1.16	ESMQ401VSN151MP30S		330	30×35	0.20	2.17	ESMQ421VSN331MR35S	
	180	22×35	0.15	1.44	ESMQ401VSN181MP35S		330	35×30	0.20	2.17	ESMQ421VSN331MA30S	
	220	22×40	0.15	1.49	ESMQ401VSN221MP40S		390	25.4×50	0.20	2.27	ESMQ421VSN391MQ50S	
	220	25.4×30	0.15	1.49	ESMQ401VSN221MQ30S		390	30×35	0.20	2.27	ESMQ421VSN391MR35S	
	270	22×45	0.15	1.67	ESMQ401VSN271MP45S		390	35×30	0.20	2.27	ESMQ421VSN391MA30S	
	270	25.4×35	0.15	1.67	ESMQ401VSN271MQ35S		470	30×40	0.20	2.61	ESMQ421VSN471MR40S	
	270	30×25	0.15	1.67	ESMQ401VSN271MP25S		470	35×35	0.20	2.61	ESMQ421VSN471MA35S	
	330	22×50	0.15	1.90	ESMQ401VSN331MP50S		560	30×50	0.20	2.82	ESMQ421VSN561MR50S	
	330	25.4×40	0.15	1.90	ESMQ401VSN331MQ40S		560	35×40	0.20	2.82	ESMQ421VSN561MA40S	
	330	30×30	0.15	1.90	ESMQ401VSN331MR30S		680	35×45	0.20	3.11	ESMQ421VSN681MA45S	
	330	35×25	0.15	1.90	ESMQ401VSN331MA25S		450	82	22×25	0.20	0.83	ESMQ451VSN820MP25S
	390	25.4×45	0.15	2.13	ESMQ401VSN391MQ45S			100	22×25	0.20	0.93	ESMQ451VSN101MP25S
	390	30×35	0.15	2.13	ESMQ401VSN391MR35S			120	22×30	0.20	1.04	ESMQ451VSN121MP30S
	390	35×30	0.15	2.13	ESMQ401VSN391MA30S			150	22×35	0.20	1.19	ESMQ451VSN151MP35S
470	25.4×50	0.15	2.39	ESMQ401VSN471MQ50S	150	25.4×25		0.20	1.19	ESMQ451VSN151MQ25S		
470	30×40	0.15	2.39	ESMQ401VSN471MR40S	180	22×40		0.20	1.35	ESMQ451VSN181MP40S		
470	35×30	0.15	2.39	ESMQ401VSN471MA30S	180	25.4×30		0.20	1.35	ESMQ451VSN181MQ30S		
560	30×45	0.15	2.69	ESMQ401VSN561MR45S	220	22×45		0.20	1.55	ESMQ451VSN221MP45S		
560	35×35	0.15	2.69	ESMQ401VSN561MA35S	220	25.4×40		0.20	1.55	ESMQ451VSN221MQ40S		
680	30×50	0.15	2.96	ESMQ401VSN681MR50S	220	30×30		0.20	1.55	ESMQ451VSN221MR30S		
680	35×40	0.15	2.96	ESMQ401VSN681MA40S	220	35×25		0.20	1.55	ESMQ451VSN221MA25S		
820	35×45	0.15	3.25	ESMQ401VSN821MA45S	270	22×50		0.20	1.78	ESMQ451VSN271MP50S		
420	100	22×25	0.20	0.97	ESMQ421VSN101MP25S	270		25.4×40	0.20	1.78	ESMQ451VSN271MQ40S	
	120	22×25	0.20	1.08	ESMQ421VSN121MP25S	270		30×30	0.20	1.78	ESMQ451VSN271MR30S	
	150	22×30	0.20	1.30	ESMQ421VSN151MP30S	330		25.4×50	0.20	2.01	ESMQ451VSN331MQ50S	
	150	25.4×25	0.20	1.30	ESMQ421VSN151MQ25S	330		30×40	0.20	2.01	ESMQ451VSN331MR40S	
	180	22×35	0.20	1.48	ESMQ421VSN181MP35S	330	35×30	0.20	2.01	ESMQ451VSN331MA30S		
	180	25.4×30	0.20	1.48	ESMQ421VSN181MQ30S	390	30×40	0.20	2.24	ESMQ451VSN391MR40S		
	220	22×40	0.20	1.65	ESMQ421VSN221MP40S	390	35×35	0.20	2.24	ESMQ451VSN391MA35S		
	220	25.4×35	0.20	1.65	ESMQ421VSN221MQ35S	470	30×45	0.20	2.53	ESMQ451VSN471MR45S		
	220	30×25	0.20	1.65	ESMQ421VSN221MR25S	470	35×40	0.20	2.53	ESMQ451VSN471MA40S		
	270	22×50	0.20	1.94	ESMQ421VSN271MP50S	560	30×50	0.20	2.82	ESMQ451VSN561MR50S		
	270	25.4×35	0.20	1.94	ESMQ421VSN271MQ35S	560	35×45	0.20	2.82	ESMQ451VSN561MA45S		

## ◆RATED RIPPLE CURRENT MULTIPLIERS

### ●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V <sub>dc</sub>	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V <sub>dc</sub>	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is shorted with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [United Chemi-Con \(UCC\):](#)

[ESMQ451VSN561MR50S](#) [ESMQ401VSN271MR25S](#) [ESMQ201VSN152MQ50S](#) [ESMQ251VSN152MR50S](#)  
[ESMQ251VSN182MA45S](#) [ESMQ351VSN391MP50S](#) [ESMQ351VSN821MR50S](#) [ESMQ3B1VSN102MR50S](#)  
[ESMQ201VSN102MQ35S](#) [ESMQ161VSN332MA45S](#) [ESMQ161VSN681MP30S](#) [ESMQ251VSN681MQ35S](#)  
[ESMQ251VSN391MP30S](#) [ESMQ401VSN681MA40S](#) [ESMQ251VSN471MQ25S](#) [ESMQ201VSN222MA40S](#)  
[ESMQ401VSN151MP30S](#) [ESMQ251VSN821MA25W](#) [ESMQ251VSN152MA40S](#) [ESMQ351VSN561MR40S](#)  
[ESMQ451VSN151MQ25S](#) [ESMQ451VSN221MP45S](#) [ESMQ251VSN561MP40S](#) [ESMQ401VSN271MQ35S](#)  
[ESMQ251VSN471MQ30S](#) [ESMQ201VSN391MP25S](#) [ESMQ451VSN181MQ30S](#) [ESMQ451VSN121MP30S](#)  
[ESMQ3B1VSN391MP45S](#) [ESMQ401VSN221MP40S](#) [ESMQ401VSN221MQ30S](#) [ESMQ201VSN122MQ40S](#)  
[ESMQ451VSN391MR40S](#) [ESMQ401VSN331MA25S](#) [ESMQ401VSN331MP50S](#) [ESMQ401VSN471MQ50S](#)  
[ESMQ161VSN152MR30S](#) [ESMQ251VSN821MP50S](#) [ESMQ201VSN681MQ30S](#) [ESMQ201VSN471MP30T](#)  
[ESMQ161VSN102MP40S](#) [ESMQ201VSN182MR45S](#) [ESMQ251VSN821MQ40S](#) [ESMQ201VSN272MA50S](#)  
[ESMQ251VSN681MP45S](#) [ESMQ401VSN271MP45S](#) [ESMQ451VSN561MA45S](#) [ESMQ161VSN222MR40S](#)  
[ESMQ251VSN122MR40S](#) [ESMQ161VSN561MP25S](#) [ESMQ451VSN331MA30S](#) [ESMQ401VSN821MA45S](#)  
[ESMQ401VSN561MR45S](#) [ESMQ351VSN151MP25S](#) [ESMQ401VSN681MR50S](#) [ESMQ401VSN471MR40S](#)  
[ESMQ201VSN102MP45S](#) [ESMQ201VSN821MP40S](#) [ESMQ161VSN182MR35S](#) [ESMQ161VSN102MQ30S](#)  
[ESMQ351VSN681MA35S](#) [ESMQ351VSN102MA50S](#) [ESMQ201VSN561MP30S](#) [ESMQ451VSN181MP40S](#)  
[ESMQ251VSN222MA50S](#) [ESMQ451VSN101MP25S](#) [ESMQ161VSN392MA50S](#) [ESMQ161VSN821MP35S](#)  
[ESMQ451VSN331MR40S](#) [ESMQ451VSN820MP25S](#) [ESMQ451VSN471MR45S](#) [ESMQ251VSN102MR35S](#)  
[ESMQ401VSN181MP35S](#) [ESMQ251VSN471MP35S](#) [ESMQ201VSN102MR30S](#) [ESMQ451VSN271MP50S](#)  
[ESMQ451VSN471MA40S](#) [ESMQ451VSN331MQ50S](#) [ESMQ201VSN222MR50S](#) [ESMQ201VSN471MP30S](#)  
[ESMQ201VSN681MP35S](#) [ESMQ351VSN471MR35S](#) [ESMQ201VSN122MR30S](#) [ESMQ401VSN391MA30S](#)  
[ESMQ201VSN152MR35S](#) [ESMQ201VSN122MP50S](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.