

## Monitoring relay - EMD-SL-PH-690 - 2905597

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Monitoring relay for monitoring phase sequence, phase failure, and asymmetry for 208 V AC ... 690 V AC from 3-phase voltages, 2 PDTs, with screw connection

### Product Description

Increasingly higher demands are being placed on safety and system availability – across all sectors. Processes are becoming more and more complex, not only in mechanical engineering and the chemical industry, but also in plant and automation technology. Demands on power engineering are also increasing constantly.

Error-free and therefore cost-effective operation can only be achieved through continuous monitoring of important network and system parameters. Electronic monitoring relays in the EMD series are available for a wide range of monitoring tasks to avoid the consequences of errors or to keep them within limits.

The operating states are indicated using colored LEDs, errors that may occur can be sent to a control system via a floating contact or can shut down a part of the system. Some device versions are equipped with startup and response delays in order to briefly tolerate measured values outside the set monitoring range.



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	160.0 g
Custom tariff number	85364900
Country of origin	Austria

### Technical data

#### Dimensions

Width	22.5 mm
Height	90 mm
Depth	113 mm

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C (C300)
	-25 °C ... 55 °C (B300)
Ambient temperature (storage/transport)	-25 °C ... 70 °C

# Monitoring relay - EMD-SL-PH-690 - 2905597

## Technical data

### Input data

Nominal input voltage $U_N$	690 V (3~ 208 V ... 690 V)
Input voltage range	177 V ... 794 V (3~)
Function	Undervoltage, phase sequence, phase failure
Min setting range of the voltage threshold value	177 V AC
Max. setting range of the voltage threshold value	794 V AC
Setting range for response delay	0.1 s ... 10 s
Basic accuracy	$\leq 3\%$ (of scale end value)
Setting accuracy	$\leq 5\%$ (of scale end value)
Repeat accuracy	$\leq 2\%$
Asymmetry	25 %
Recovery time	> 500 ms

### Contact side

Contact type	2 floating PDT contacts
Maximum switching voltage	400 V AC
Interrupting rating (ohmic load) max.	1250 VA (5 A/250 V AC at +55 °C)
	150 VA (5 A/30 V DC at +55 °C)
	75 VA (2.5 A/30 V DC at +70 °C)
Output fuse	5 A (fast-blow)

### Power supply

Supply voltage	$\pm 15\%$ (= measuring voltage)
----------------	----------------------------------

### General

Mechanical service life	20 x 10 <sup>6</sup> cycles
Operating mode	100% operating factor
Mounting position	any
Assembly instructions	on standard DIN rail NS 35 in accordance with EN 60715
Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
Overvoltage category	III (IEC 60664-1)
Housing insulation material	Polyamide PA, self-extinguishing
Color	green
Conformance	CE-compliant
UL, USA / Canada	UL/C-UL listed UL 508

### Connection data

Conductor cross section flexible min.	0.5 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section solid min.	0.5 mm <sup>2</sup>

# Monitoring relay - EMD-SL-PH-690 - 2905597

## Technical data

### Connection data

Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	20
Conductor cross section AWG max.	14
Stripping length	8 mm
Connection method	Screw connection

## Classifications

### eCl@ss

eCl@ss 5.1	27371801
eCl@ss 6.0	27371801
eCl@ss 8.0	27371802

### ETIM

ETIM 5.0	EC001440
----------	----------

## Approvals

### Approvals

---

#### Approvals

UL Listed / cUL Listed / cULus Listed

---

#### Ex Approvals

---

#### Approvals submitted

---

### Approval details

UL Listed
-----------

cUL Listed
------------


# Monitoring relay - EMD-SL-PH-690 - 2905597

## Approvals



## Drawings

Block diagram

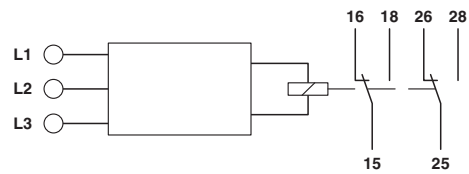



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.