

VD motor.

VD-49.15-K1




- 3-phase external rotor motor with EC technology
- High poled motor structure for optimum power density
- Basic motor with electronic module K1 for operation on external control electronics
- Very good synchronization characteristics
- Robust mechanical design in IP 54 for industrial applications
- Long lifetime by using precision ball bearings
- Insulation class E
- Electrical connection via cable

Nominal data			
Type		VD-49.15-K1-B00	VD-49.15-K1-D00
Nominal voltage (U _N)	V DC	24	48
Nominal speed (n _N)*	rpm	4 500	5 300
Nominal torque (M _N)*	mNm	235	245
Nominal current (I _N)*	A	6.10	3.40
Nominal output power (P _N)*	W	110	135
Starting torque (M _{max})	mNm	1 150	1 300
Permissible peak current (I _{max})**	A	30.0	18.5
Speed at no-load operation (n _L)	rpm	6 000	
No-load current (I _L)	A	0.47	0.36
Recommended speed control range	rpm	0 ... 6 000	
Rotor moment of inertia (J _R)	kgm² x10 ⁻⁶	108	
Motor constant (K _E)	mVs/rad	41.0	80.7
Connection resistance (R _V)	Ω	0.23	0.62
Connection inductance (L _V)	mH	0.17	0.62
Overload protection		To be implemented via the control electronics	
Permissible ambient temperature range (T _U)	°C	0 ... +40	
Weight	kg	0.59	
Order no. (cable type)***	IP 54	937 4915 000	937 4915 001
Subject to alterations	* At T _U max. 40°C ** Permissible time for peak current: max. 1 sec. – to be repeated only after complete cool down *** Classification of protection class refers to installed state with sealing on the flange side		


Characteristic curve

VD-49.15-K1-B00 (at 25°C)

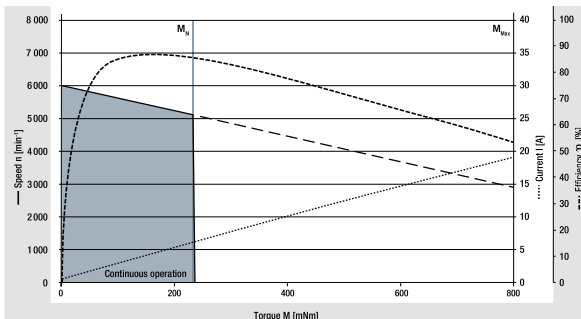

¹⁾ Nominal data, see table


VD-49.15-K1-D00 (at 25°C)

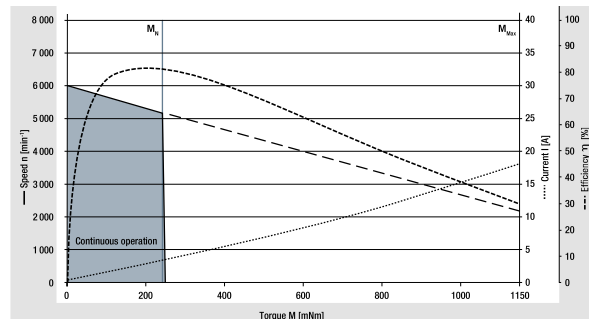

¹⁾ Nominal data, see table

Technical drawing

All dimensions in mm

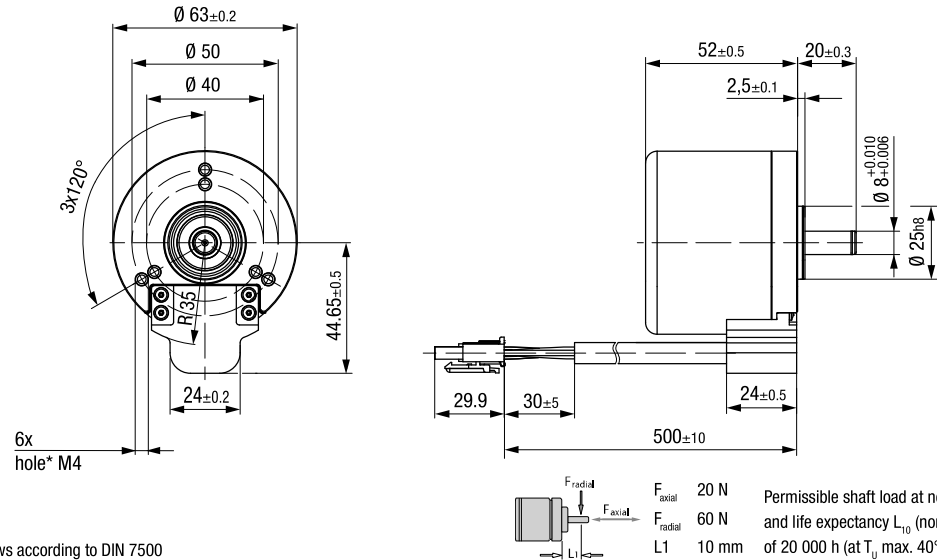


* For thread-rolling screws according to DIN 7500


Electrical connection

Supply wire

No.	Color	Function
1	yellow	Phase W
2	violet	Phase V
3	brown	Phase U



Molex plug
no. 39-03-6035



Molex plug
no. 39-01-2085

Signal wire


No.	Color	Function
1	—	—
2	red	+12 V
3	white	Hall B
4	green	Hall A
5	—	—
6	—	—
7	black	GND
8	gray	Hall C

Modular construction kit

Recommended external control electronics

VTD-XX.XX-K3	Speed (page 34)
VTD-XX.XX-K4S	Position (page 36)
VTD-60.13-K5SB	Position (page 38)

Basic motor

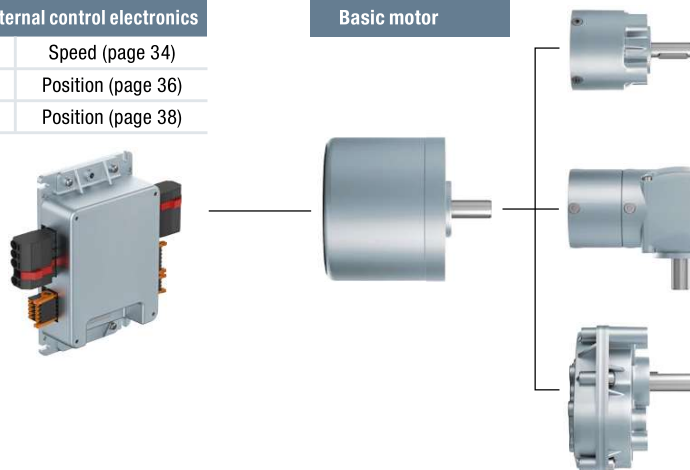

Planetary gearheads

NoiselessPlus 63 (page 44)
Performax® 63 (page 46)
Performax®Plus 63 (page 48)

Crown gearheads

EtaCrown® 75 (page 50)
EtaCrown®Plus 63 (page 52)

Spur gearheads

Compactline 91 (page 56)
Flatline 85 (page 60)

Crown gearheads.

EtaCrown® 75





Image of 2-stage gearhead

- Maximum safety in design and operation, as well as optimal vandalism protection; no automatic lock due to high efficiency of the crown wheel technology
- Space-saving installation due to zero offset axle and symmetrical structure
- Flexible application possibilities with various optional shaft outlets and available shaft geometries
- Wide reduction range by means of upstream / downstream planetary stage
- High radial loads due to double ball bearing in the output shaft

Nominal data								
Gearheads		EtaCrown® 75.1			EtaCrown® 75.2			
Reduction ratio		4.10	6.70	10.1	20.3	33.3	60.0	113
No. of stages		1			2			
Efficiency		0.90			0.81			
Max. input speed (n _i)	rpm	6 000			6 000			
Rated output torque (M _{ab})	Nm	6.00	5.00	2.43	10.0	10.0	10.0	10.0
Short-term torque (M _{max})	Nm	15.0	12.5	6.08	25.0	25.0	25.0	25.0
Gear play	°	0.55 ... 1.1			0.55 ... 1.1			
Permissible operating temperature (T _o)	°C	-20 ... +80			-20 ... +80			
Operating mode		S1			S1			
Protection class		IP 50			IP 50			
Weight	kg	0.9			1.3			
Shaft load radial / axial	N	150 / 500	250 / 500	400 / 500	550 / 500	800 / 500	1 100 / 500	1 300 / 500
Service life	h	5 000			5 000			
Lubrication		Maintenance-free grease lubrication for life						
Installation position		any						
Subject to alterations		on request						

Technical drawing

Image of 1-stage gearhead with left shaft end (W05) / All dimensions in mm

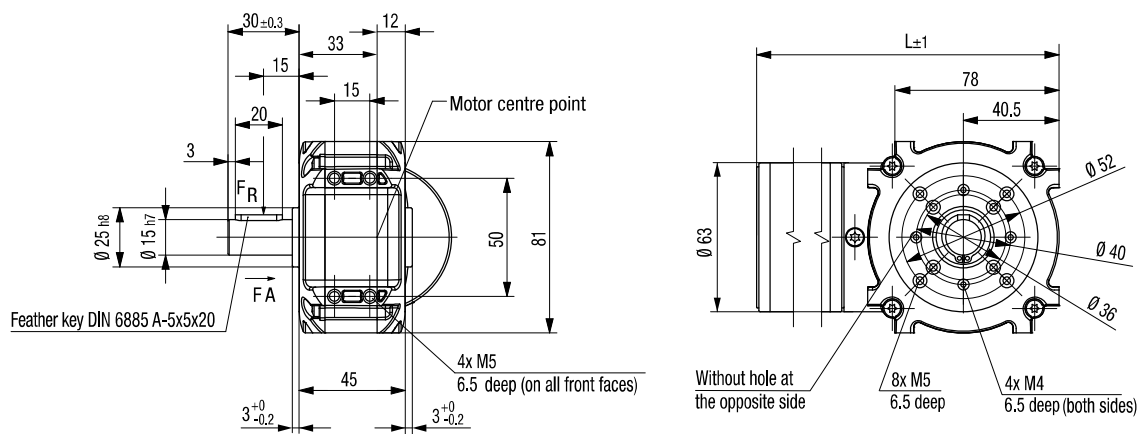

F_{axial} 500 N
 F_{radial} see table
 $L1$ 15 mm

Permissible shaft load at nominal speed and life expectancy L_{10} (nominal operation) and operating factor $C_b = 1$ (see page 82) of 5 000 h (at T_u 40°C).

Shaft end, right (W05) (standard)	Shaft end, left (W06)	Shaft end, both sides (W07)	Hollow shaft (W08)
			Hollow shaft Ø 10 mm

Length of the possible motor / gearhead combinations

Motor / gearhead		L - 1-stage	L - 2-stage
ECI-63.20-K1-E75	mm	197	233
ECI-63.40-K1-E75	mm	217	253
ECI-63.60-K1-E75	mm	237	273
ECI-63.20-K3-E75	mm	210	246
ECI-63.40-K3-E75	mm	230	266
ECI-63.60-K3-E75	mm	250	286
ECI-63.20-K4-E75	mm	210	246
ECI-63.40-K4-E75	mm	230	266
ECI-63.60-K4-E75	mm	250	286
ECI-63.20-K5-E75	mm	203	239
ECI-63.40-K5-E75	mm	223	259
ECI-63.60-K5-E75	mm	243	279

Subject to alterations



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.