

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5015912611](#)
Status: **Active**
Overview: [slimstack_mm016_pitch](#)
Description: 0.40mm (.016") Pitch SlimStack™ Board-to-Board Receptacle, SMT, Dual Row, Vertical Stacking, 0.90mm (.035") Stacking Height, With Solder Tabs, 26 Circuits

Documents:

[3D Model](#) [Product Specification PS-501591-003 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

| | |
|----------------|---------------------------------------|
| Product Family | PCB Receptacles |
| Series | 501591 |
| Application | Board-to-Board |
| Overview | slimstack_mm016_pitch |
| Product Name | SlimStack™ |

Physical

| | |
|--------------------------------|-----------------------|
| Circuits (Loaded) | 26 |
| Color - Resin | Black |
| Durability (mating cycles max) | 20 |
| Glow-Wire Compliant | No |
| Lock to Mating Part | Yes |
| Mated Height (in) | 0.035 In |
| Mated Height (mm) | 0.90 mm |
| Material - Metal | Phosphor Bronze |
| Material - Plating Mating | Gold |
| Number of Rows | 2 |
| Orientation | Vertical |
| PCB Locator | No |
| PCB Retention | Yes |
| Packaging Type | Embossed Tape on Reel |
| Pitch - Mating Interface (in) | 0.016 In |
| Pitch - Mating Interface (mm) | 0.40 mm |
| Polarized to Mating Part | No |
| Polarized to PCB | No |
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |
| Temperature Range - Operating | -25°C to +85°C |
| Termination Interface: Style | Surface Mount |


Electrical

| | |
|-------------------------------|-----------------|
| Current - Maximum per Contact | 0.3A |
| Voltage - Maximum | 50V AC (RMS)/DC |

Material Info

Reference - Drawing Numbers

| | |
|-------------------------|---|
| Packaging Specification | SPK-501591-001 |
| Product Specification | PS-501591-003, RPS-501591-010, RPS-501591-012, RPS-501591-015, RPS-501591-016, RPS-501591-019 |
| Sales Drawing | SD-501591-005, SD-501591-006 |

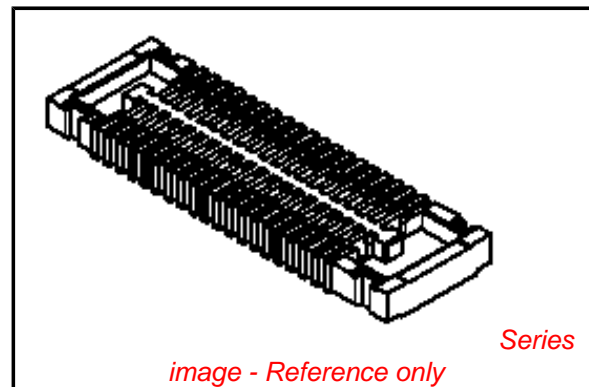

EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.




Search Parts in this Series

[501591Series](#)

Mates With

[501594 PCB Header](#)

10 9 8 7 6 5 4 3 2 1

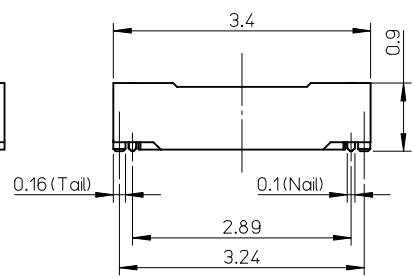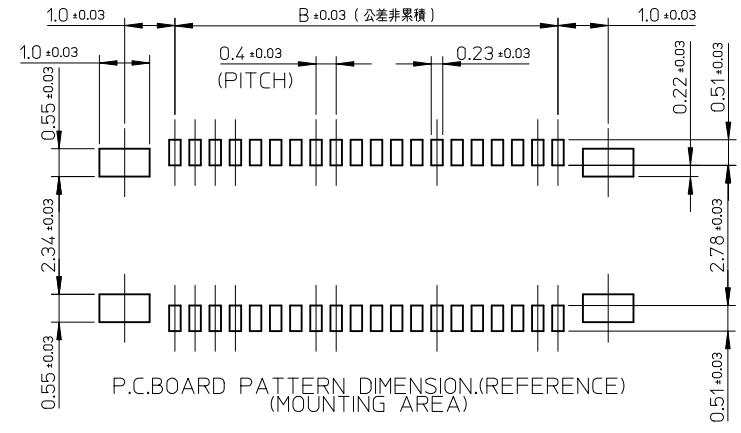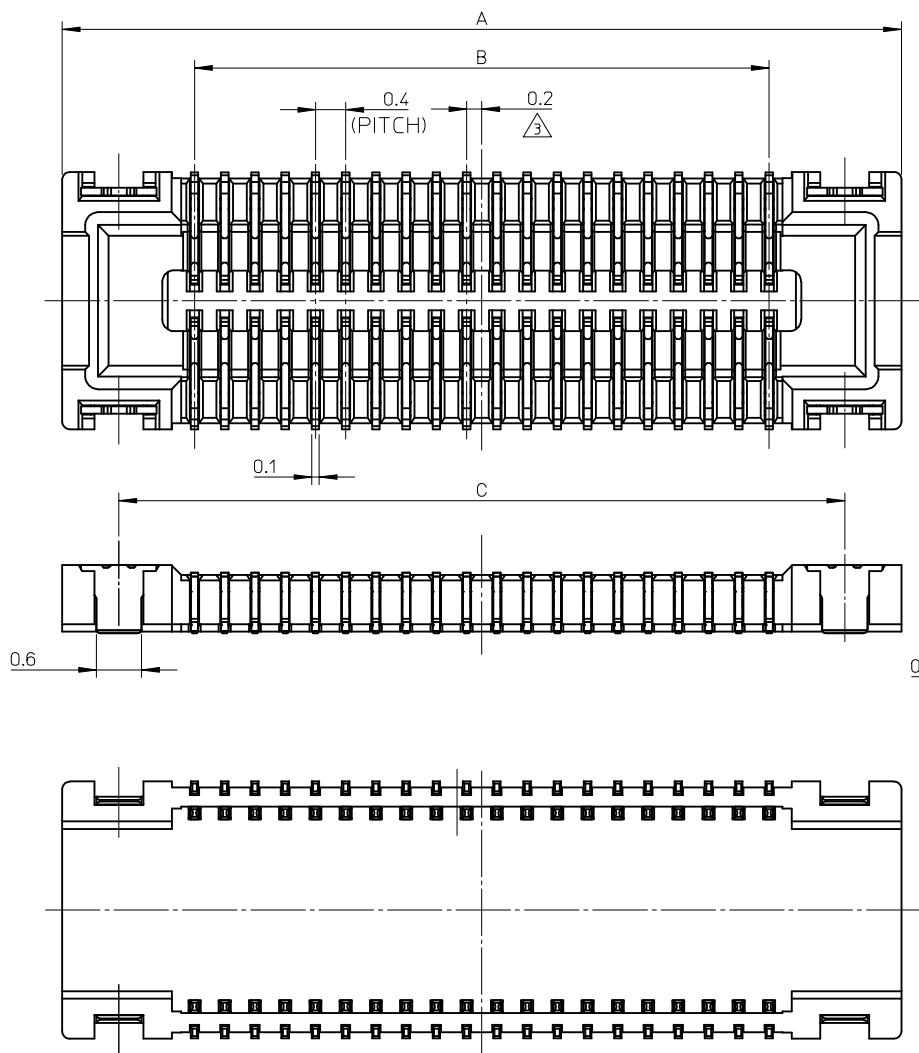

| | | | | | |
|------|------|------|-----------------------|--------------|---------|
| 15.6 | 13.6 | 17.1 | 501591-7011 | 501591-7010 | 70 |
| 12.4 | 10.4 | 13.9 | 501591-5411 | 501591-5410 | 54 |
| 11.6 | 9.6 | 13.1 | 501591-5011 | 501591-5010 | 50 |
| 10.4 | 8.4 | 11.9 | 501591-4411 | 501591-4410 | 44 |
| 9.6 | 7.6 | 11.1 | 501591-4011 | 501591-4010 | 40 |
| 8.4 | 6.4 | 9.9 | 501591-3411 | 501591-3410 | 34 |
| 7.6 | 5.6 | 9.1 | 501591-3011 | 501591-3010 | 30 |
| 6.8 | 4.8 | 8.3 | 501591-2611 | 501591-2610 | 26 |
| 6.4 | 4.4 | 7.9 | 501591-2411 | 501591-2410 | 24 |
| 6.0 | 4.0 | 7.5 | 501591-2211 | 501591-2210 | 22 |
| 5.6 | 3.6 | 7.1 | 501591-2011 | 501591-2010 | 20 |
| 4.0 | 2.0 | 5.5 | 501591-1211 | 501591-1210 | 12 |
| 3.6 | 1.6 | 5.1 | 501591-1011 | 501591-1010 | 10 |
| C | B | A | EMBOSSED TAPE PACKAGE | MATERIAL NO. | CIRCUIT |
| | | | ORDER No. | | |

| | | | | | | | |
|---|--|---|----------------------------|--------------------|--|-------------------------------|------------------------|
| REVISED EC NO: J2008-3370 DRW:KSE10 2008/06/17 CHK:D:MSASAO 2008/06/17 APPR:MSASAO 2008/06/25 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE --- | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION |
| | 10 UNDER | ±0.2 | DRAWN BY TASAKAWA | DATE 2006/07/10 | TITLE 0.4MM PITCH B/B CONN. H=0.9 W=3.4 REC ASSY | | |
| | 10 OVER 30 UNDER | ±0.25 | CHECKED BY MSASAO | DATE 2006/07/10 | MOLEX INCORPORATED | | |
| | 30 OVER | ±0.3 | APPROVED BY MSASAO | DATE 2006/07/10 | MATERIAL NO. SEE TABLE | DOCUMENT NO. SD-501591-005 | SHEET NO. 1 OF 2 |
| | ANGULAR ±3 ° | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | |
| | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | | | | | |

注記 NOTES

1. 使用材料
MATERIAL

ハウジング：液晶ポリマー (LCP) ガラス充填 UL-94V-0 (黒)
HOSING : LIQUID CRYSTAL POLYMER (GLASS FILLED) UL94V-0 (COLOR:BLACK)

ターミナル：りん青銅 (t=0.1)
TERMINAL : PHOSHOR BRONZE (t=0.1)

金具：りん青銅 (t=0.1)
FITTING NAIL : PHOSHOR BRONZE (t=0.1)

2. メッキ仕様
PLATING

ターミナル
TERMINAL

金メッキ 0.1マイクロメートル以上 (コンタクト部)
GOLD 0.1 MICROMETER MINIMUM (CONTACT AERA)

金メッキ 0.05マイクロメートル以上 (テール部)
GOLD 0.05 MICROMETER MINIMUM (TAIL AERA)

下地メッキ：ニッケルメッキ 1.0 マイクロメートル以上
UNDER PLATING : NICKEL 1.0 MICROMETER MINIMUM

金具
FITTING NAIL

錫メッキ :1.0マイクロメートル以上
TIN PLATING :1.0 MICROMETER MINIMUM


下地メッキ :ニッケル 1.0マイクロメートル以上
UNDER PLATING :NICKEL 1.0 MICROMETER MINIMUM

△ (全極数/2)=偶数の場合に適用
APPLY FOR (CIRCUIT/2)=EVEN

4. 嵌合相手 : 501594-**10 シリーズ
WITH MATE : 501594-**10 SERIES

5. テール及び金具の平坦度は、0.1以下
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1 MAXIMUM

6. ELV AND RoHS COMPLIANT.


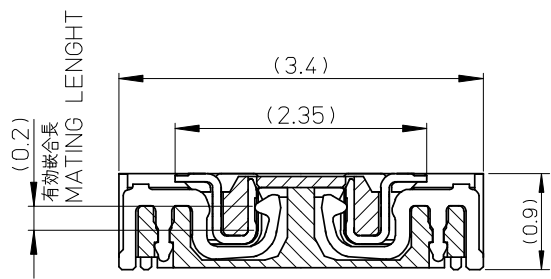


嵌合断面図 (参考)
MATED DRAWING


| | | | | | | | | |
|---|---------------------------------------|---|-----------------------------|--------------------|--|------------------------|------------------------|--|
| REVISED EC NO: J2008-3370 DRAWN: KSETO 2008/06/17 CHKD: MSASAO 2008/06/17 APPR: MSASAO 2008/06/25 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE --- | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION | |
| | 10 UNDER | ±0.2 | DRAWN BY TASAKAWA | DATE 2006/07/10 | TITLE 0.4MM PITCH B/B CONN. H=0.9 W=3.4 REC ASSY | | | |
| | 10 OVER 30 UNDER | ±0.25 | CHECKED BY MSASAO | DATE 2006/07/10 | | | | |
| | 30 OVER | ±0.3 | APPROVED BY MSASAO | DATE 2006/07/10 | MOLEX MOLEX INCORPORATED | | | |
| | ANGULAR ±3 ° | | MATERIAL NO. SEE SHEET 1 | | DOCUMENT NO. SD-501591-005 | | SHEET NO. 2 OF 2 | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | | |

NOTES

- 製品詳細寸法については製品単体図面を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
- 梱包数量： 3000 個/リール
NUMBER OF CONNECTORS : 3000 PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

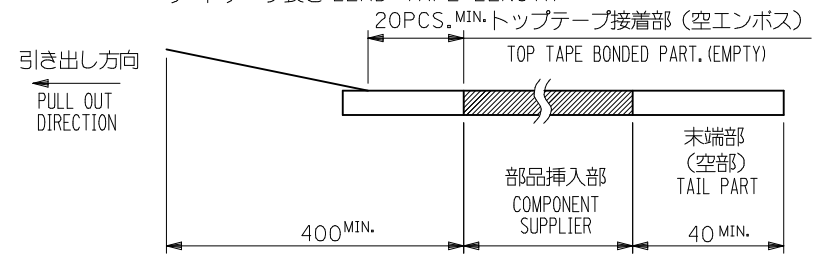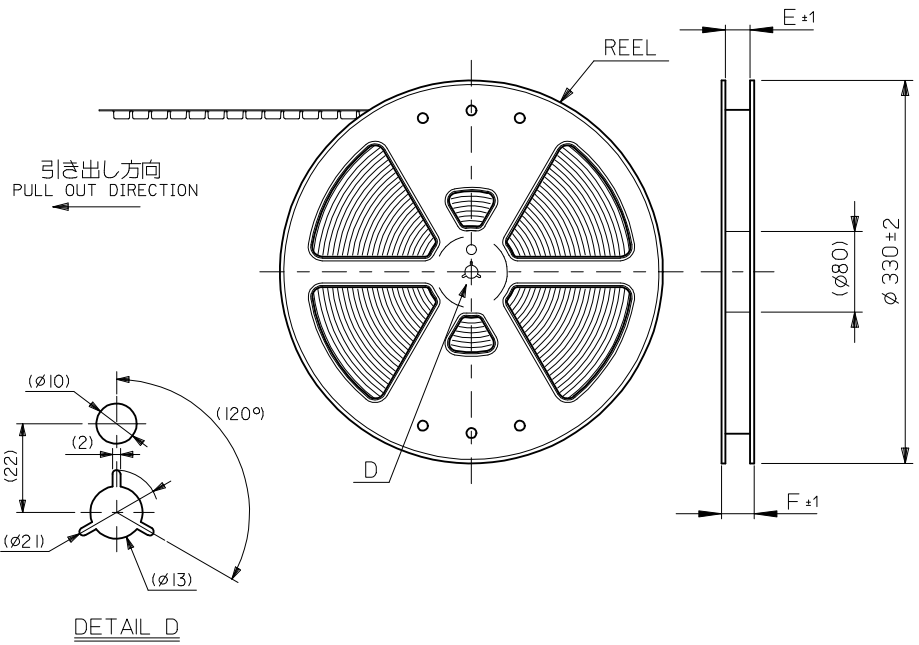




- トップテープの剥離強度： JES-59 参照
剥離方向は下図参照。
PEELING OFF STRENGTH OF TOP TAPE : REFER TO JES-59
PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE.

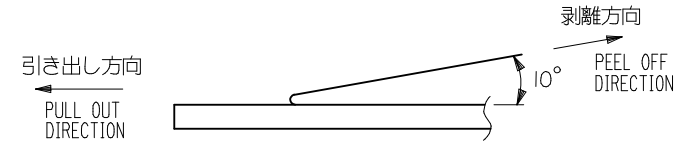

- 材料 MATERIAL
キャリアテープ (CARRIER TAPE) : ホリスチレン (POLYSTYLENE)
トップテープ (TOPTAPE) : PET , PE , PEF
リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>
POLYSTYLENE (PS) <RECYCLE MATERIAL CONTAINED>

6.ELV AND RoHS COMPLIANT.

| | | | | | | | |
|---|---------------------------------------|---|---------------------------------------|--|---------------|--|-----------|
| REVISED EC NO: J2008-3370 DRW:KSETO 2008/06/17 CHK:D:MSASAO 2008/06/17 APPR:MSASAO 2008/06/25 REV: | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE --- | 501591-**11 | MODEL NO. |
| | 10 UNDER ±0.2 | | DRAWN BY DATE TASAKAWA 2006/07/10 | | TITLE | 0.4 B-TO-B CONN. REC ASSY (HGT=0.9) EMBSTP PKG | |
| | 10 OVER 30 UNDER ±0.25 | | CHECKED BY DATE MSASAO 2006/07/10 | | | MOLEX INCORPORATED | |
| | 30 OVER ±0.3 | | APPROVED BY DATE MSASAO 2006/07/10 | | | DOCUMENT NO. | SHEET NO. |
| | ANGULAR ±3 ° | | MATERIAL NO. SEE SHEET 1 | | SD-501591-006 | | 1 OF 2 |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | |

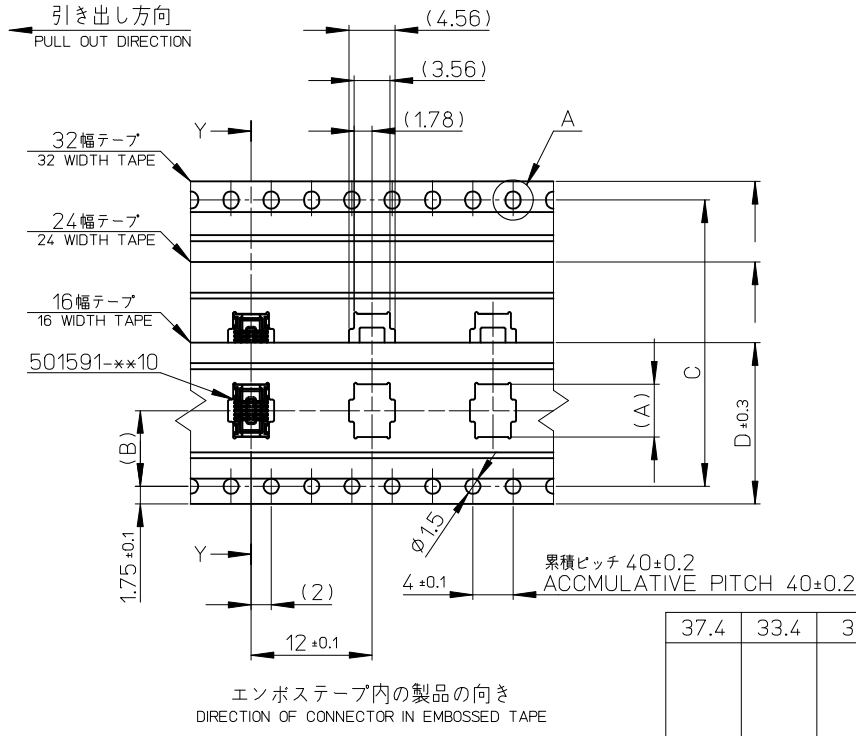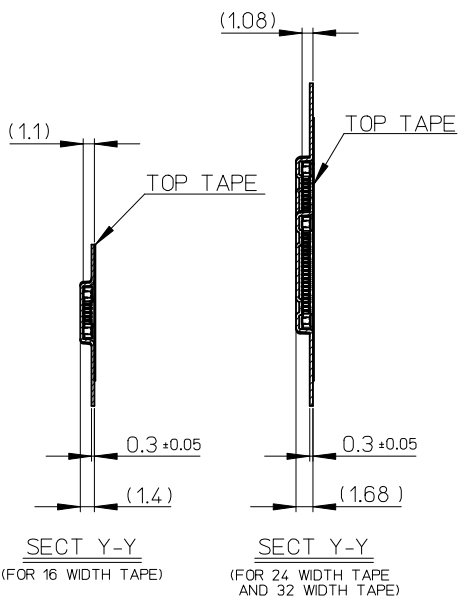

| | | | | | | | |
|------|------|----|------|------|-------|--------------|-----------|
| 37.4 | 33.4 | 32 | 28.4 | 14.2 | 17.26 | 501591-7011 | 70 |
| | | | | | 14.06 | 501591-5411 | 54 |
| | | | | | 13.26 | 501591-5011 | 50 |
| | | | | | 12.06 | 501591-4411 | 44 |
| | | | | | 11.26 | 501591-4011 | 40 |
| 29.4 | 25.4 | 24 | — | 11.5 | 10.06 | 501591-3411 | 34 |
| | | | | | 9.26 | 501591-3011 | 30 |
| | | | | | 8.46 | 501591-2611 | 26 |
| | | | | | 8.06 | 501591-2411 | 24 |
| | | | | | 7.66 | 501591-2211 | 22 |
| | | | | | 7.26 | 501591-2011 | 20 |
| 21.4 | 17.4 | 16 | — | 7.5 | 5.66 | 501591-1211 | 12 |
| | | | | | 5.26 | 501591-1011 | 10 |
| F | E | D | C | (B) | (A) | MATERIAL No. | 極数 CKT |

| | | | | | | | | | |
|---|---------------------------------------|--------|--|--|--------------------|---|---------------|---------------------------|---------------------|
| REVISED EC NO: J2008-3370 DRW:KSE10 2008/06/17 CHK:D:MSASAO 2008/06/17 APPR:MSASAO 2008/06/25 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE --- | DESIGN UNITS METRIC | | 501591-**11 MODEL No. | |
| | 10 UNDER | ± 0.2 | DRAWN BY TASAKAWA | | DATE 2006/07/10 | TITLE 0.4 B-TO-B CONN. REC ASSY (HGT=0.9) EMBSTP PKG | | | |
| | 10 OVER 30 UNDER | ± 0.25 | CHECKED BY MSASAO | | DATE 2006/07/10 | APPROVED BY MSASAO | | | |
| | 30 OVER | ± 0.3 | APPROVED BY MSASAO | | DATE 2006/07/10 | MOLEX INCORPORATED | | MATERIAL NO. DOCUMENT NO. | |
| | ANGULAR ± 3 ° | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | SEE TABLE | | SD-501591-006 | | SHEET NO. 2 OF 2 |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.