

ConnectPort® X5 R

Rugged Wireless PAN to IP Gateway

Rugged telematics gateway for Vehicle Area Network (VAN) traffic, such as ZigBee and 802.15.4 point-to-multipoint, for IP connectivity using cellular or Wi-Fi connections.




Overview

The ConnectPort X5 R offers the industry's smallest Quint-Mode (cellular, satellite, GPS, Wi-Fi, Vehicle Area Network) wireless telematics product. The gateway provides remote connectivity to mobile assets to monitor operating health, performance, location and driver/operator behavior, as well as to enable automated event reporting.

The ConnectPort X5 R supports Vehicle Area Networks (VANs) with Digi's industry leading XBee(R) 802.15.4/ZigBee or Point-to-Multipoint 2.4 GHz radio technology.

The ConnectPort X5 R offers cellular, Wi-Fi and satellite for flexible WAN connectivity. Cellular provides instant/always-on communications, while Wi-Fi provides a cost-effective way to transfer large files, firmware or logs across "low-cost" secure public or private networks. The ConnectPort X5 R Wi-Fi functionality can also be used to wirelessly connect peripheral devices such as vehicle displays and handhelds.

Application Highlight

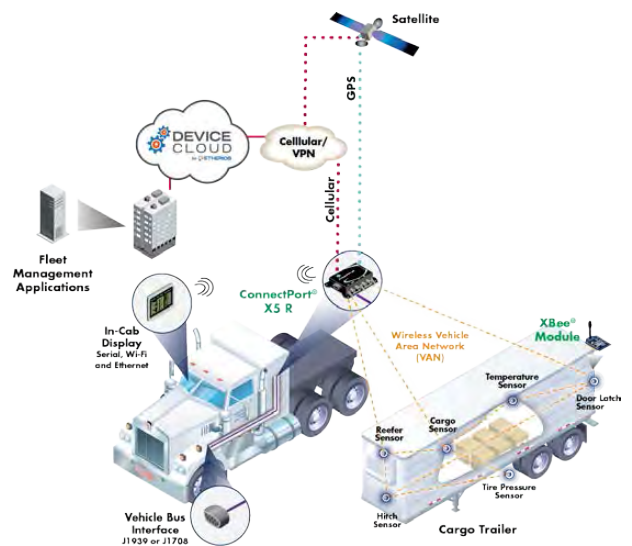

Features/Benefits

- Automated event reporting – unit can continuously transmit vehicle status at user-defined intervals
- Factory sealed enclosure with IP67 and SAE1455 certifications
- J1939 CAN interface with J1708 serial connectivity support
- Advanced power management functionality
- Global coverage over satellite or cellular (GSM/GPRS or CDMA) networks
- 3-axis accelerometer to detect movement, driver behavior and accident conditions

Related Products



Device Cloud Solutions



Dev Kits



Modules



Specifications

ConnectPort® X5 R

General	
Management	Device Cloud and/or WebUI
Software	Python, Device Cloud by Etherios™, DIA
Protocols	UDP/DHCP, SNMPv1/v2
Memory	Total: 16 MB Flash, 32 MB RAM; Available user space: ~5.5 MB Flash, ~18 MB RAM (without Device Cloud DIA) / ~15 MB RAM (with
LEDs	Power, User, Cellular link/activity, Signal strength (3 bars), GPS, XBee®, Ethernet, Wi-Fi
Security	SSL tunnels, SSHv2, FIPS 197 (serial port)
VPN	IPsec with IKE/ISAKMP, Multiple tunnel support, DES, 3DES and up to 256-bit AES, VPN pass-through, GRE forwarding
Device Connector	Tyco 23-pin
Dimensions (L x W x H)	5.5 in x 7.5 in x 1.8 in (14.0 cm 19.0 x cm x 4.6 cm)
Weight	2.2 lb (1.0 kg)
Antennas	
XBee	7" dipole; RP-TNC (Center pin - on device: male; on antenna: female)
Combination Cellular/GPS	Adhesive mount, 3m cable; TNC (Center pin - on device: female; on antenna: male)
Satellite	Magnetic mount, 15' cable; TNC (Center pin - on device: female; on antenna: male)
Wi-Fi	Surface mount, 10' cable; RP-TNC (Center pin - on device: male; on antenna: female)
Connector Type (on Gateway)	50 Ω TNC, Standard polarity for cellular, Reverse polarity for Wi-Fi, GPS, XBee
Interfaces	
Cellular	GSM/GPRS/CDMA, 1xRTT Sprint Field accessible SIM access via SIM cover (GSM/GPRS only)
XBee (Low-Power RF)	Optional XBee-PRO® module; XBee ZB (ZigBee) and XBee 802.15.4 versions available
Serial	1 RS-232 (4-Wire) with 115.2 Kbps throughput
Ethernet	1 RJ-45 10 Mbps 10Base-T; Full or Half duplex
GPS	SBAS enabled; 50 channels; Time-To-First-Fix on cold start: 29 s; Horizontal position accuracy: 2.0 m; Velocity accuracy: 515 m/s
Satellite	Optional Iridium; Message size: 100-200 bytes; Latency: 30 s typical / 2 min max
Accelerometer	3-axis
Vehicle Bus	J1939 and J1708, wired or wireless via 3rd-party adapters
I/O	2 DIO, 1 ignition sense
Wi-Fi (802.11b/g)	
Frequency/Data Rate	2.4 GHz; Up to 54 Mbps w/fallback
Transmit Power/Receiver Sensitivity	802.11b/g (16 dBm @ 6 Mbps, 12 dBm @54 Mbps); -82 dBm @ 11 Mbps
Modes	Ad-hoc, AP Client and Infrastructure modes
Power Requirements	
Power Input/Power Supply	9-48 VDC; +12/24 V battery
Power Consumption	Idle: 4 W; Peak: 12 W; Sleep: 60 mW
Environmental/Regulatory Approvals	
Environmental	IP67 and SAE1455 certified
Operating Temperature	-40° C to +70° C (-40° F to +158° F)
Safety	UL 60950-1, EN 60950-1, CSA 22.2 No. 60950, UL 60950-22, EN 60950-22
EMC	CE, FCC PART 15 (Class B), SAE/ISO automotive testing

You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support

91001562
C4/513

Digi International
Worldwide HQ
877-912-3444
952-912-3444
www.digi.com

Digi International
France
+33-1-55-61-98-98
www.digi.fr

Digi International
Japan
+81-3-5428-0261
www.digi-intl.co.jp

Digi International
Singapore
+65-6213-5380

Digi International
China
+86-21-50492199
www.digi.com.cn



www.digi.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.