



## Hyperfast Rectifier, 30 A FRED Pt™

**30ETH06S**

Base  
cathode

**D<sup>2</sup>PAK**
**30ETH06-1**

**TO-262**

### FEATURES

- Hyperfast recovery time
- Low forward voltage drop
- Low leakage current
- 125 °C operating junction temperature
- Dual diode center tap
- Designed and qualified for industrial level

### DESCRIPTION/APPLICATIONS

State of the art hyperfast recovery rectifiers designed with optimized performance of forward voltage drop, hyperfast recovery time and soft recovery.

The planar structure and the platinum doped life time control guarantee the best overall performance, ruggedness and reliability characteristics.

These devices are intended for use in PFC boost stage in the AC-DC section of SMPS, inverters or as freewheeling diodes.

Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

### PRODUCT SUMMARY

|                    |       |
|--------------------|-------|
| $t_{rr}$ (typical) | 28 ns |
| $I_{F(AV)}$        | 30 A  |
| $V_R$              | 600 V |

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER                                   | SYMBOL         | TEST CONDITIONS       | MAX.        | UNITS |
|---------------------------------------------|----------------|-----------------------|-------------|-------|
| Peak repetitive reverse voltage             | $V_{RRM}$      |                       | 600         | V     |
| Average rectified forward current           | $I_{F(AV)}$    | $T_C = 103\text{ °C}$ | 30          | A     |
| Non-repetitive peak surge current           | $I_{FSM}$      | $T_J = 25\text{ °C}$  | 200         |       |
| Operating junction and storage temperatures | $T_J, T_{Stg}$ |                       | - 65 to 175 | °C    |

### ELECTRICAL SPECIFICATIONS ( $T_J = 25\text{ °C}$ unless otherwise specified)

| PARAMETER                           | SYMBOL        | TEST CONDITIONS                               | MIN. | TYP. | MAX. | UNITS         |
|-------------------------------------|---------------|-----------------------------------------------|------|------|------|---------------|
| Breakdown voltage, blocking voltage | $V_{BR}, V_R$ | $I_R = 100\text{ }\mu\text{A}$                | 600  | -    | -    | V             |
| Forward voltage                     | $V_F$         | $I_F = 30\text{ A}$                           | -    | 2.0  | 2.6  |               |
|                                     |               | $I_F = 30\text{ A}, T_J = 150\text{ °C}$      | -    | 1.34 | 1.75 |               |
| Reverse leakage current             | $I_R$         | $V_R = V_R\text{ rated}$                      | -    | 0.3  | 50   | $\mu\text{A}$ |
|                                     |               | $T_J = 150\text{ °C}, V_R = V_R\text{ rated}$ | -    | 60   | 500  |               |
| Junction capacitance                | $C_T$         | $V_R = 600\text{ V}$                          | -    | 33   | -    | pF            |
| Series inductance                   | $L_S$         | Measured lead to lead 5 mm from package body  | -    | 8.0  | -    | nH            |

**DYNAMIC RECOVERY CHARACTERISTICS** ( $T_J = 25\text{ }^{\circ}\text{C}$  unless otherwise specified)

| PARAMETER               | SYMBOL    | TEST CONDITIONS                                                                  | MIN. | TYP. | MAX. | UNITS |
|-------------------------|-----------|----------------------------------------------------------------------------------|------|------|------|-------|
| Reverse recovery time   | $t_{rr}$  | $I_F = 1.0\text{ A}$ , $dI_F/dt = 50\text{ A}/\mu\text{s}$ , $V_R = 30\text{ V}$ | -    | 28   | 35   | ns    |
|                         |           | $T_J = 25\text{ }^{\circ}\text{C}$                                               | -    | 31   | -    |       |
|                         |           | $T_J = 125\text{ }^{\circ}\text{C}$                                              | -    | 77   | -    |       |
| Peak recovery current   | $I_{RRM}$ | $T_J = 25\text{ }^{\circ}\text{C}$                                               | -    | 3.5  | -    | A     |
|                         |           | $T_J = 125\text{ }^{\circ}\text{C}$                                              | -    | 7.7  | -    |       |
| Reverse recovery charge | $Q_{rr}$  | $T_J = 25\text{ }^{\circ}\text{C}$                                               | -    | 65   | -    | nC    |
|                         |           | $T_J = 125\text{ }^{\circ}\text{C}$                                              | -    | 345  | -    |       |

**THERMAL - MECHANICAL SPECIFICATIONS**

| PARAMETER                                       | SYMBOL         | TEST CONDITIONS                            | MIN.         | TYP. | MAX.       | UNITS                       |
|-------------------------------------------------|----------------|--------------------------------------------|--------------|------|------------|-----------------------------|
| Maximum junction and storage temperature range  | $T_J, T_{Stg}$ |                                            | - 65         | -    | 175        | $^{\circ}\text{C}$          |
| Thermal resistance, junction to case per leg    | $R_{thJC}$     |                                            | -            | 0.7  | 1.1        | $^{\circ}\text{C}/\text{W}$ |
| Thermal resistance, junction to ambient per leg | $R_{thJA}$     | Typical socket mount                       | -            | -    | 70         |                             |
| Thermal resistance, case to heatsink            | $R_{thCS}$     | Mounting surface, flat, smooth and greased | -            | 0.2  | -          |                             |
| Weight                                          |                |                                            | -            | 2.0  | -          | g                           |
|                                                 |                |                                            | -            | 0.07 | -          | oz.                         |
| Mounting torque                                 |                |                                            | 6.0<br>(5.0) | -    | 12<br>(10) | kgf · cm<br>(lbf · in)      |
| Marking device                                  |                | Case style D <sup>2</sup> PAK              | 30ETH06S     |      |            |                             |
|                                                 |                | Case style TO-262                          | 30ETH06-1    |      |            |                             |



# Hyperfast Rectifier, 30 A FRED P<sub>t</sub><sup>TM</sup>

30ETH06S/30ETH06-1

Vishay High Power Products

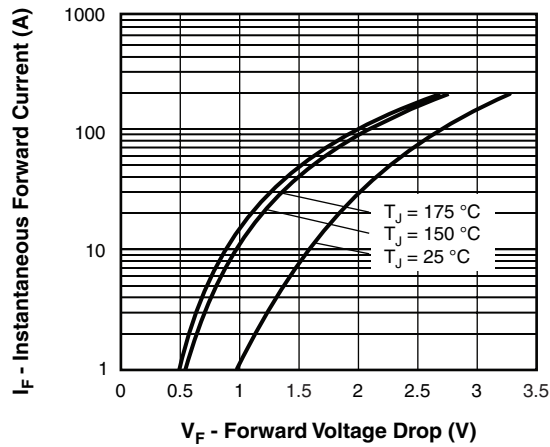


Fig. 1 - Typical Forward Voltage Drop Characteristics

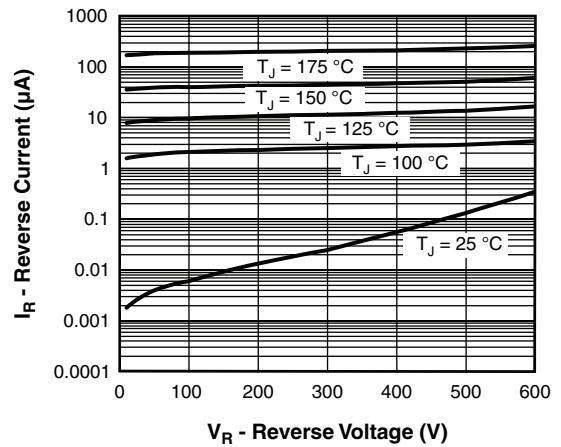


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage

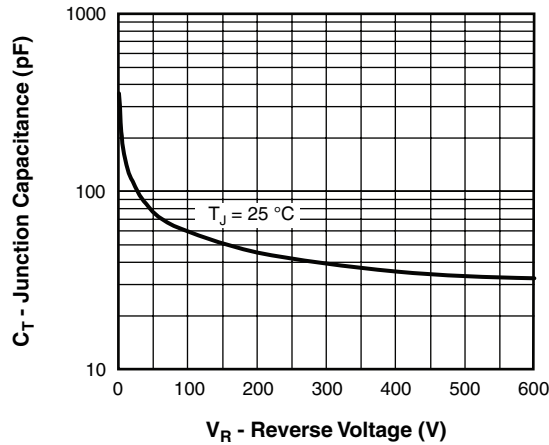


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

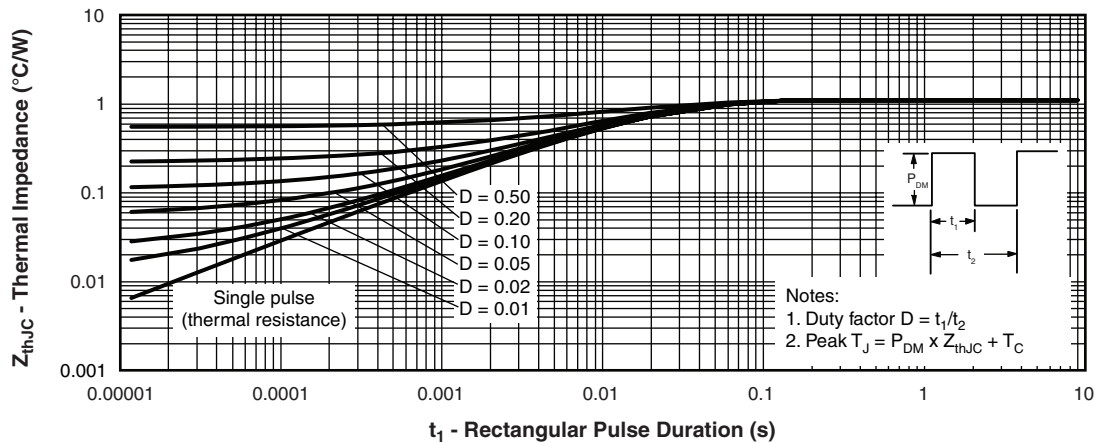


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

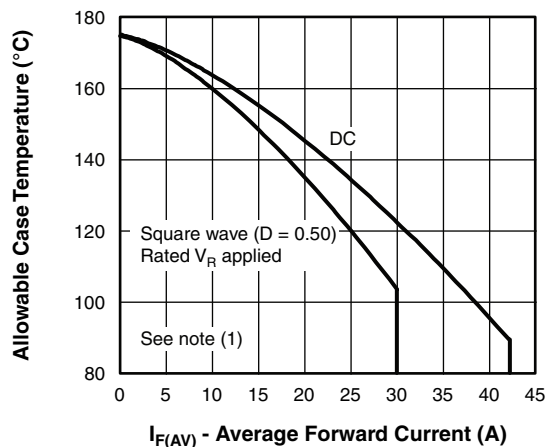


Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current

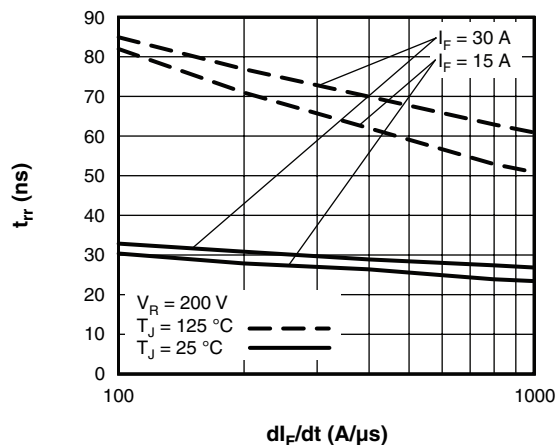


Fig. 7 - Typical Reverse Recovery Time vs.  $dI_F/dt$

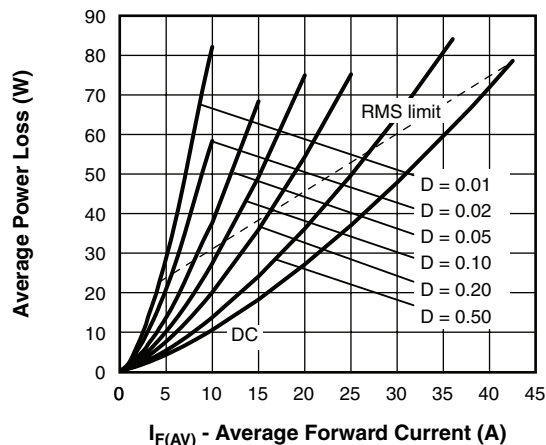


Fig. 6 - Forward Power Loss Characteristics

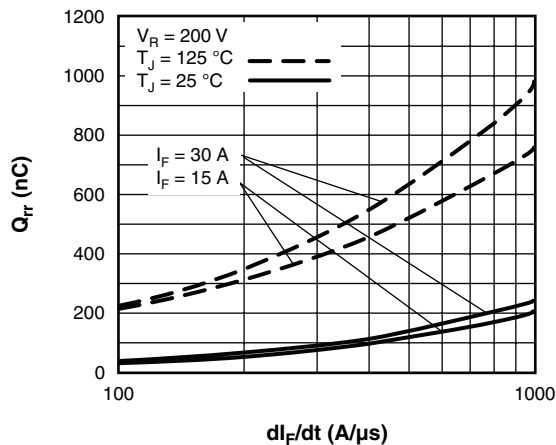


Fig. 8 - Typical Stored Charge vs.  $dI_F/dt$

## Note

- (1) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;  
 $P_d$  = Forward power loss =  $I_{F(AV)} \times V_{FM}$  at  $(I_{F(AV)}/D)$  (see fig. 6);  
 $P_{d_{REV}}$  = Inverse power loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R$  at  $V_{R1}$  = Rated  $V_R$

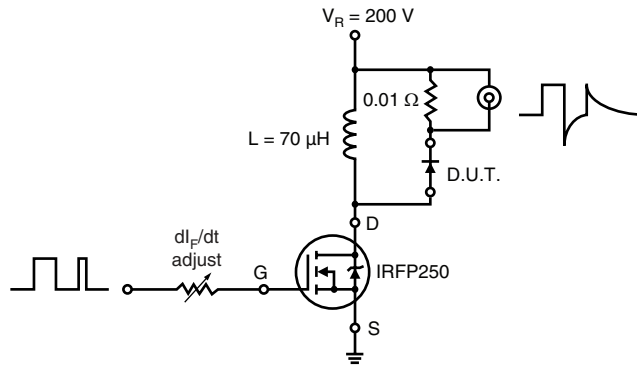


Fig. 9 - Reverse Recovery Parameter Test Circuit

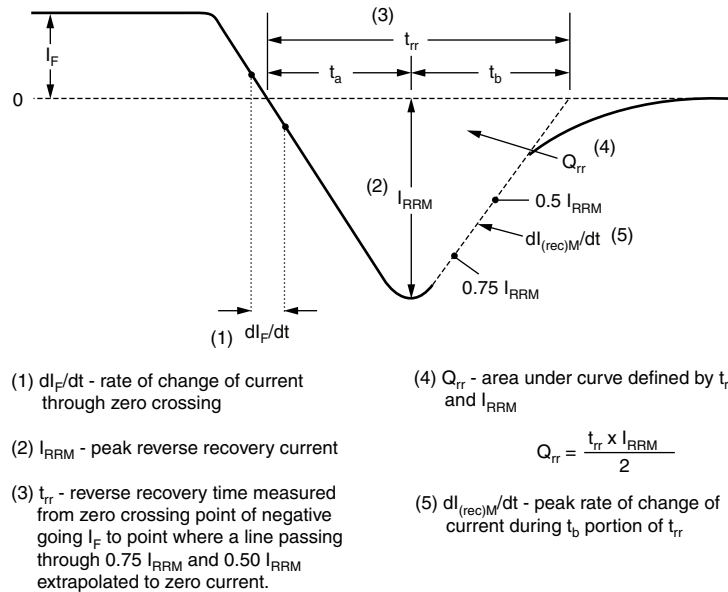


Fig. 10 - Reverse Recovery Waveform and Definitions

## ORDERING INFORMATION TABLE

|             |    |   |   |   |    |   |     |   |
|-------------|----|---|---|---|----|---|-----|---|
| Device code | 30 | E | T | H | 06 | S | TRL | - |
|             | 1  | 2 | 3 | 4 | 5  | 6 | 7   | 8 |

- 1** - Current rating (30 = 30 A)
- 2** - E = Single diode
- 3** - T = TO-220, D<sup>2</sup>PAK
- 4** - H = Hyperfast recovery
- 5** - Voltage rating (06 = 600 V)
- 6** -
  - S = D<sup>2</sup>PAK
  - -1 = TO-262
- 7** -
  - None = Tube (50 pieces)
  - TRL = Tape and reel (left oriented, for D<sup>2</sup>PAK package)
  - TRR = Tape and reel (right oriented, for D<sup>2</sup>PAK package)
- 8** -
  - None = Standard production
  - PbF = Lead (Pb)-free

| LINKS TO RELATED DOCUMENTS |                                                                               |
|----------------------------|-------------------------------------------------------------------------------|
| Dimensions                 | <a href="http://www.vishay.com/doc?95014">http://www.vishay.com/doc?95014</a> |
| Part marking information   | <a href="http://www.vishay.com/doc?95008">http://www.vishay.com/doc?95008</a> |
| Packaging information      | <a href="http://www.vishay.com/doc?95032">http://www.vishay.com/doc?95032</a> |



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.