




PET-102GT++

Industrial 2-port Gigabit High Power PoE++ Extender

Features

- Support 1 port PoE P.D. input to 2 port POE P.S.E output with 10/100/1000 Base-T(X) for power and data extender
- Support P.S.E. based on IEEE 802.3af/at standard
- PoE P.D. input support 90watts max.
- PoE P.S.E. output support 90watts max. per port
- Multiple unit , daisy-chain installation support
- High reliability and rigid IP-30 housing
- DIN-Rail and wall mount design

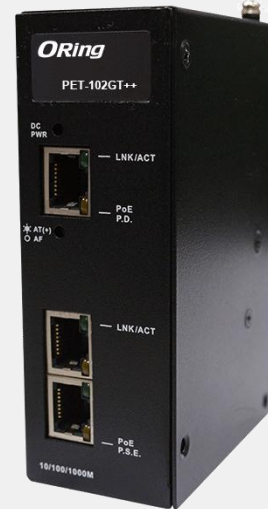


Introduction

ORing PET-102GT++ is a high power PoE extender and compatible with IEEE802.3at/af [\[Note1\]](#) standard. With one 10/100/1000TxBase-T(X) P.D. input port and two 10/100/1000TxBase-T(X) P.S.E. output ports, the device not only pass on Ethernet data but also feed on and forward power from the previous PoE device to the next device. Furthermore, the PET-102GT++ can be powered by external DC power sources. By using external DC power to compensate for power losses caused by long-haul transmission, users can continue to use the PoE extender to enlarge the distance unlimitedly. With the ability to provide 90Watts [\[Note3\]](#) PoE power per port, the PET-102GT++ is surely a user-friendly and high-power PoE extender.

Note1: The equipment being powered must be fully IEEE 802.3at/802.3af compliant in order for the power supply to be able to sense the PoE devices signature and apply power. Power is supplied on Ethernet pins 1/2 (V+) and 3/6 (V-).

Dimension

Dimension (Unit =mm)

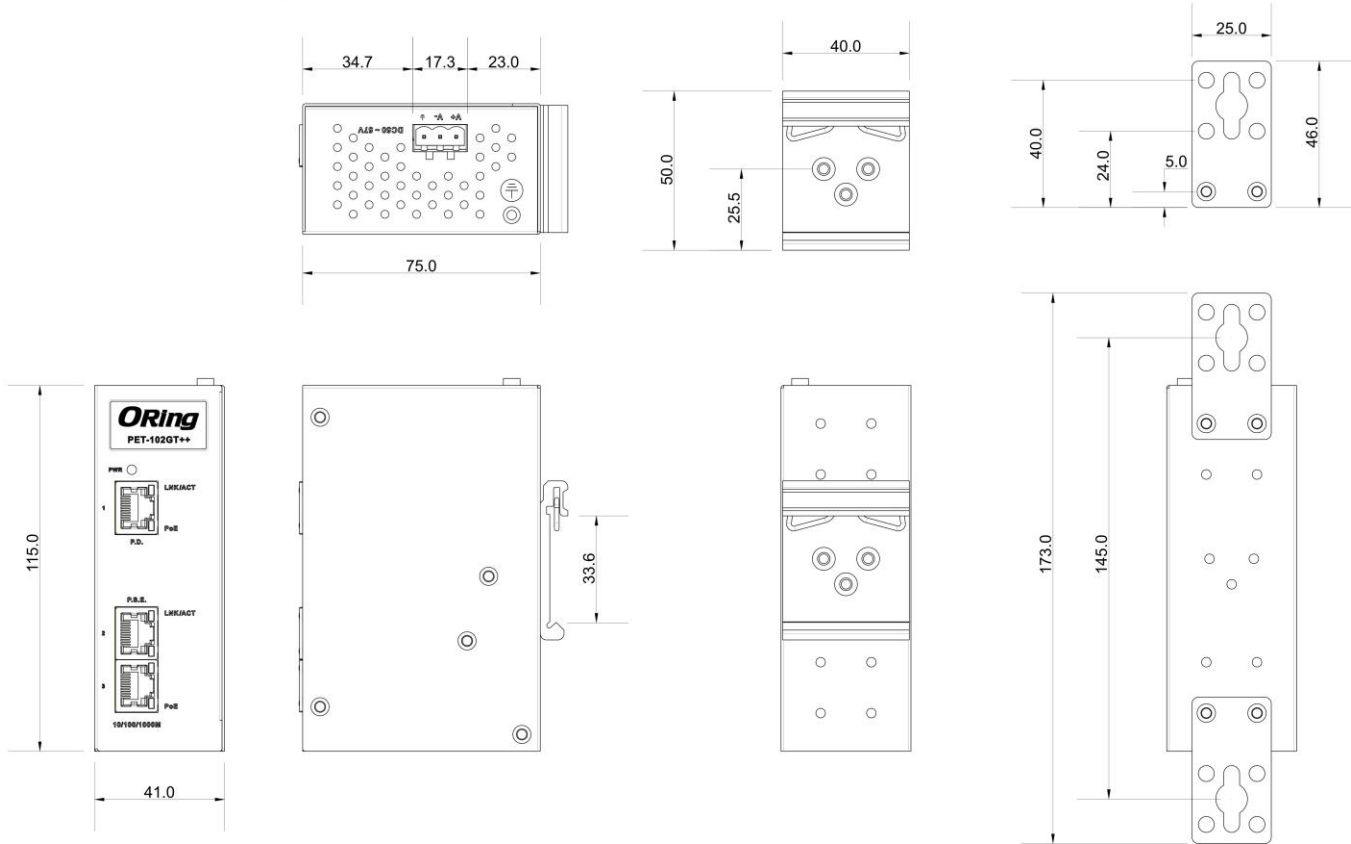

Connector and Pin Definition

1000 Base-T

Pin	RJ-45 Input (Data Only)		RJ-45 Output (Data and Power)	
	Symbol	Description	Symbol	Description
1	BI_DA+	Data BI_DA+	BI_DA+ (Vdc1+)	Data BI_DA+ and Feeding Power(+)
2	BI_DA-	Data BI_DA-	BI_DA- (Vdc1+)	Data BI_DA- and Feeding Power(+)
3	BI_DB+	Data BI_DB+	BI_DB+ (Vdc1-)	Data BI_DB+ and Feeding Power(-)
4	BI_DC+	Data BI_DC+	BI_DC+ (Vdc2+)	Data BI_DC+ Feeding Power(+) ^[Note2]
5	BI_DC-	Data BI_DC-	BI_DC- (Vdc2+)	Data BI_DC- Feeding Power(+) ^[Note2]
6	BI_DB-	Data BI_DB-	BI_DB- (Vdc1-)	Data BI_DB- and Feeding Power(-)
7	BI_DD+	Data BI_DD+	BI_DD+ (Vdc2-)	Data BI_DD+ Feeding Power(-) ^[Note2]
8	BI_DD-	Data BI_DD-	BI_DD- (Vdc2-)	Data BI_DD- Feeding Power(-) ^[Note2]

10/100 Base-TX

Pin	RJ-45 Input (Data Only)		RJ-45 Output (Data and Power)	
	Symbol	Description	Symbol	Description
1	Rx+	Data Receive	Rx+ (Vdc1+)	Data Receive and Feeding power(+)
2	Rx-	Data Receive	Rx- (Vdc1+)	Data Receive and Feeding power(+)
3	Tx+	Data Transmit	Tx+ (Vdc1-)	Data Transmit and Feeding power(-)
4	NC	Not Connected	NC (Vdc2+)	Not Connected Feeding power(+) ^[Note2]
5	NC	Not Connected	NC (Vdc2+)	Not Connected Feeding power(+) ^[Note2]
6	Tx-	Data Transmit	Tx- (Vdc1-)	Data Transmit and Feeding power(-)
7	NC	Not Connected	NC (Vdc2-)	Not Connected Feeding power(-) ^[Note2]
8	NC	Not Connected	NC (Vdc2-)	Not Connected Feeding power(-) ^[Note2]

Note2: Only valid for PoE++ connection

Specifications

ORing Injector Model	PET-102GT++
Physical Ports	
RJ-45 Ethernet Port with P.D. Input	1
RJ-45 Ethernet Port with P.S.E. Output	2
Operating Voltage	
Input Voltage	50 ~ 57 VDC
Output Power	57V / 1579mA, 90 Watts max [Note3] per port
LED Indicators	
Power Indicator	DC PWR / Ready : 1 x LED Green On : Power is on and functioning Normally.
PoE P.D. Input Port Indicator	Green for Link/Act, Amber for PoE input enabled
PoE P.S.E. outputs Port Indicator	Green for Link/ACT, Amber for PoE output enabled
Protection	
Short Circuit Protection	Present
Over Load Protection	Present
Physical Characteristic	
Enclosure	IP-30
Dimension (W x D x H)	41(W) x 75 (D) x 115 (H)mm (1.61 x 2.95 x 4.52 inch)
Weight (g)	TBD
Environmental	
Storage Temperature	-40 to 80°C (-40 to 176°F)
Operating Temperature	-20 to 70°C (-4 to 158°F)
Operating Humidity	5% to 90% Non-condensing
Regulatory Approvals	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-31
Vibration	IEC60068-2-6
Safety	EN60950-1 compliant
Warranty	5 years

Note 3: LTPoE+ +TM PSE technology is applied on this product. Only when an LTPoE+ +TM Powered Device (PD) is attached can the PSE port deliver up to 90W of output power.

Ordering Information

PET-102GT++

Available Model	Model Name	Description
	PET-102GT++	Industrial 2-port Gigabit High Power PoE++ Extender

Packing List

- PET-102GT++ x 1
- QIG x 1
- DIN-Rail Kit x 1
- Wall-mount Kit x 1

Optional Accessories

- DR-75-48 : 75 Watts DIN-Rail power supply
- DR-120-48 : 120 Watts DIN-Rail power supply



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.