

**LV** series Radial Lead Type, Long Life Assurance



- High voltage (to 100V), Low ESR, High ripple current.
- Long life of 3000 hours at 105°C.
- Radial lead type:
  - Lead free flow soldering condition correspondence.
- Compliant to the RoHS directive (2002/95/EC).




## Specifications


| Item  | Performance Characteristics  |                       |   |
|---|--|-----------------------|---|
| Category Temperature Range                        | -55 to +105°C  |                       |   |
| Rated Voltage Range                               | 16 to 100V   |                       |   |
| Rated Capacitance Range                           | 6.8 to 470μF   |                       |   |
| Capacitance Tolerance                             | ±20% at 120Hz, 20°C  |                       |   |
| Tangent of loss angle (tan δ)                     | Less than or equal to the specified value at 120Hz, 20°C   |                       |   |
| ESR (※ 1)   | Less than or equal to the specified value at 100kHz, 20°C  |                       |   |
| Leakage Current (※ 2)                             | Less than or equal to the specified value. After 2 minutes' application of rated voltage at 20°C   |                       |   |
| Temperature Characteristics (Max.Impedance Ratio) | $Z+105^{\circ}\text{C} / Z+20^{\circ}\text{C} \leq 1.25$ (100kHz)<br>$Z-55^{\circ}\text{C} / Z+20^{\circ}\text{C} \leq 1.25$   |                       |   |
| Endurance   | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 3000 hours at 105°C.   | Capacitance change    | Within ± 20% of the initial capacitance value (※ 3) |
|   |  | tan δ                 | 150% or less than the initial specified value       |
|   |  | ESR (※ 1)             | 150% or less than the initial specified value       |
|   |  | Leakage current (※ 2) | Less than or equal to the initial specified value   |
| Damp Heat (Steady State)                          | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 60°C, 90% RH.  | Capacitance change    | Within ± 20% of the initial capacitance value (※ 3) |
|   |  | tan δ                 | 150% or less than the initial specified value       |
|   |  | ESR (※ 1)             | 150% or less than the initial specified value       |
|   |  | Leakage current (※ 2) | Less than or equal to the initial specified value   |
| Resistance to Soldering Heat                      | After soldering the capacitor under the soldering conditions prescribed here as preheat at 150 to 200°C for 60 to 180 seconds and peak temperature at 265°C for 10 seconds or less, the capacitor shall meet the specifications listed at right, provided that its temperature profile is measured at both of terminal ends facing the soldering side. | Capacitance change    | Within ± 10% of the initial capacitance value (※ 3) |
|   |  | tan δ                 | 130% or less than the initial specified value       |
|   |  | ESR (※ 1)             | 130% or less than the initial specified value       |
|   |  | Leakage current (※ 2) | Less than or equal to the initial specified value   |
| Marking   | Navy blue print on the case top  |                       |   |

- ※ 1 ESR should be measured at both of the terminal ends closest to the capacitor body.
- ※ 2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.
- ※ 3 Initial value : The value before test of examination of resistance to soldering.

## Dimensions

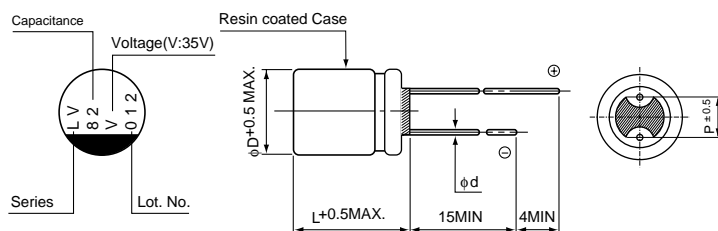

## Type numbering system (Example : 35V 82μF)

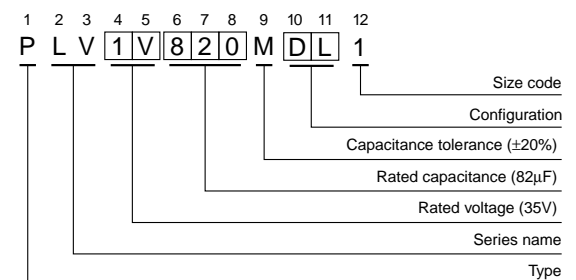

(mm)

| Size | φ8 × 9L | φ8 × 12L | φ10 × 13L |
|------|---------|----------|-----------|
| φD   | 8.0     | 8.0      | 10.0      |
| L    | 8.5     | 11.5     | 12.5      |
| P    | 3.5     | 3.5      | 5.0       |
| φd   | 0.6     | 0.6      | 0.6       |

| Voltage | 16 | 20 | 25 | 35 | 50 | 63 | 80 | 100 |
|---------|----|----|----|----|----|----|----|-----|
| Code    | C  | D  | E  | V  | H  | J  | K  | 2A  |

Please refer to page 20 about the end seal configuration.

● Dimension table in next page.



■Standard Ratings

| Rated Voltage (V) code | Surge Voltage (V) | Rated Capacitance (μF) | Case Size φD × L (mm) | tan δ | Leakage Current (μA) | ESR (mΩ) (at 100kHz 20°C) | Rated Ripple (mArms) | Part Number  |
|------------------------|-------------------|------------------------|-----------------------|-------|----------------------|---------------------------|----------------------|--------------|
| 16 (1C)                | 18.4              | 220                    | 8 × 9                 | 0.12  | 704                  | 26                        | 2100                 | PLV1C221MCL1 |
|                        |                   | 270                    | 8 × 12                | 0.12  | 864                  | 24                        | 2500                 | PLV1C271MDL1 |
|                        |                   | 470                    | 10 × 13               | 0.12  | 1504                 | 23                        | 2900                 | PLV1C471MDL1 |
| 20 (1D)                | 23.0              | 150                    | 8 × 9                 | 0.12  | 600                  | 27                        | 2000                 | PLV1D151MCL1 |
|                        |                   | 220                    | 8 × 12                | 0.12  | 880                  | 25                        | 2400                 | PLV1D221MDL1 |
|                        |                   | 330                    | 10 × 13               | 0.12  | 1320                 | 24                        | 2800                 | PLV1D331MDL1 |
| 25 (1E)                | 28.7              | 120                    | 8 × 9                 | 0.12  | 600                  | 28                        | 2000                 | PLV1E121MCL1 |
|                        |                   | 150                    | 8 × 12                | 0.12  | 750                  | 26                        | 2400                 | PLV1E151MDL1 |
|                        |                   | 270                    | 10 × 13               | 0.12  | 1350                 | 25                        | 2800                 | PLV1E271MDL1 |
| 35 (1V)                | 40.2              | 56                     | 8 × 9                 | 0.12  | 392                  | 29                        | 1900                 | PLV1V560MCL1 |
|                        |                   | 82                     | 8 × 12                | 0.12  | 574                  | 27                        | 2300                 | PLV1V820MDL1 |
|                        |                   | 150                    | 10 × 13               | 0.12  | 1050                 | 26                        | 2700                 | PLV1V151MDL1 |
| 50 (1H)                | 57.5              | 33                     | 8 × 9                 | 0.12  | 330                  | 32                        | 1900                 | PLV1H330MCL1 |
|                        |                   | 39                     | 8 × 12                | 0.12  | 390                  | 29                        | 2200                 | PLV1H390MDL1 |
|                        |                   | 68                     | 10 × 13               | 0.12  | 680                  | 28                        | 2600                 | PLV1H680MDL1 |
| 63 (1J)                | 72.4              | 22                     | 8 × 9                 | 0.12  | 277                  | 35                        | 1800                 | PLV1J220MCL1 |
|                        |                   | 27                     | 8 × 12                | 0.12  | 340                  | 33                        | 2100                 | PLV1J270MDL1 |
|                        |                   | 47                     | 10 × 13               | 0.12  | 592                  | 29                        | 2600                 | PLV1J470MDL1 |
| 80 (1K)                | 92                | 10                     | 8 × 9                 | 0.12  | 160                  | 40                        | 1700                 | PLV1K100MCL1 |
|                        |                   | 12                     | 8 × 12                | 0.12  | 192                  | 38                        | 1900                 | PLV1K120MDL1 |
|                        |                   | 22                     | 10 × 13               | 0.12  | 352                  | 35                        | 2300                 | PLV1K220MDL1 |
| 100 (2A)               | 115               | 6.8                    | 8 × 9                 | 0.12  | 136                  | 45                        | 1600                 | PLV2A6R8MCL1 |
|                        |                   | 10                     | 8 × 12                | 0.12  | 200                  | 42                        | 1800                 | PLV2A100MDL1 |
|                        |                   | 18                     | 10 × 13               | 0.12  | 360                  | 38                        | 2200                 | PLV2A180MDL1 |

Rated ripple current (mArms) at 105°C 100kHz

- Taping specifications are given in page 20, 21, 22.
- Please refer to page 3 for the minimum order quantity.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.