SIGN	DATE	DESCRIPTION	APPROVER
1	02/03'05	Part No. changed.	Marvin
2	06/26'06	Solid/Stranded wire(AWG) is changed from 12-22 to 12-24	Marvin
3	8/10'06	Added VDE and TUV standard	梁仁松
4	12/17'08	Add the tolerance table	Jacke
5	12/17'08	The temperature changed from -30°c,+105°c to -40°c,+115°c	Jacke
6	03/08'10	Add the 2P mark	Jacke
7	04/03'14	Update the drawing	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

TJ xx 71x 0 xxxx G

- xx — No. OF POLES
  - 02 2 CONTACTS
  - 03 3 CONTACTS
  - ... ...
  - 24 24 CONTACTS
- 71x — COLOR
  - 0 Black (RAL9005)
  - 2 Red (RAL3001/D)
  - 3 Orange(RAL2011/P)
  - 4 Yellow(RAL1018/A)
  - 5 Green(RAL6018/T)
  - 6 Blue (RAL5015/A)
  - 8 Grey(RAL7035/D)
  - 7 9 White(RAL1102)
  - C Green(RAL6018/U)
- xxxx — 00Y0: "@" Logo (Standard); 00YA: "ANYTEK" Mark; Any special item by customer requst. please contact sales department.
- G RoHS compliant (lead<4%) In copper Alloy

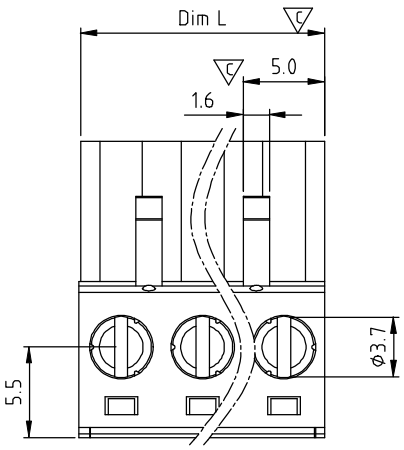



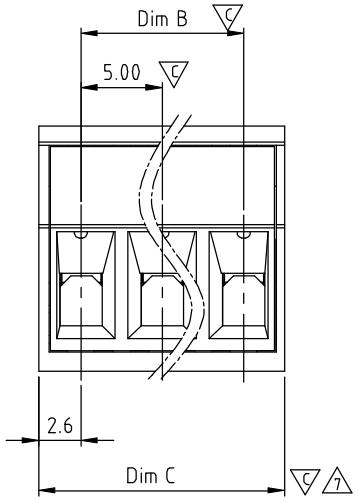

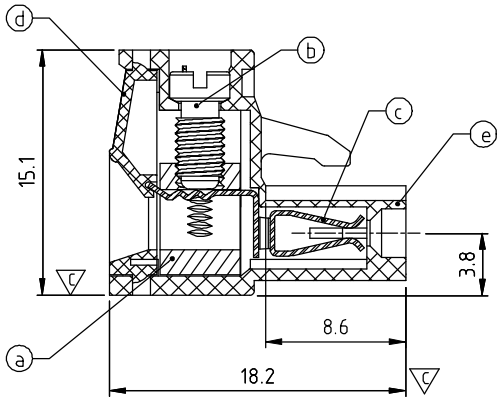

Material

- Item ⓐ Clamp: Brass(CuZn) Ni plated
- Item ⓑ Terminal screw: Steel Zinc plating "-" slot type
- Item ⓒ Female contact: PhBz ,Tin plated
- Item ⓓ Terminal Cover: Thermoplastic (UL94V-0)
- Item ⓔ Terminal housing: Thermoplastic (UL94V-0)

Electrical cULus/VDE/TUV

- Voltage rating: 300VAC/300VAC/300VAC
- Current rating: 20A/20A/20A
- Wire range: $2.5mm^2/0.34-2.5mm^2$
- Solid wire(AWG): 12-24/14-22
- Stranded wire(AWG): 12-24/14-22
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus VDE TÜV
- Critical dimension: C

7 4 Dimension — N= Number of poles

Dim L	N×5.0
Dim B	(N-1)×5.0
Dim C	N×5.0+0.10

Poles	Tolerance
2P-7P	±0.15
8P-12P	±0.25
13P-18P	±0.30
19P-24P	±0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TJ-5.00mm Series				
PART NO.	TJxx71x0xxxxG			DWG NO.	8TJ0301
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 04/03`14	Chen Bo 04/03`14	UNIT: mm / SCALE: NONE / SHEET: 01/01 / REV.: H	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.