


Digi Connect SP[®] Family

Standard and Customizable Serial Servers

The Digi Connect SP serial server delivers a powerful, compact and cost-effective off-the-shelf hardware platform for standard plug and play applications or embedded networking solutions.

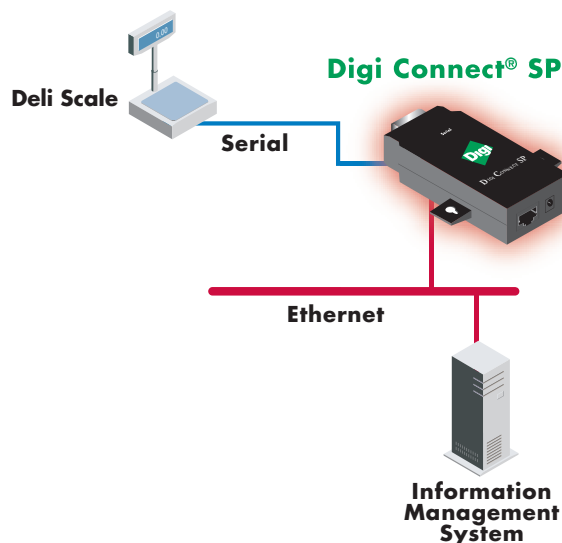

Features/Benefits

- Off-the-shelf hardware platform for standard or custom network applications
- Compact enclosure design with integrated mounting tabs
- RS-232 only or switch-selectable RS-232/422/485 serial interface
- Flexible 9-30VDC power input
- Product customization options
 - Web UI
 - Logos and color schemes
 - Factory defaults
- SSL/TLS with NIST-certified AES encryption for security sensitive environments
- Digi's patented RealPort with encryption for COM/TTY port redirection and control
- IPv6 capable
- SNMP support
- Support for SSHv2 connections
- Digi Connectware[®] Manager-ready

Overview

More and more, electronic devices used in all types of commercial applications are being network-enabled so that data from those devices can be accessed, evaluated and utilized in real time. The Digi Connect SP device server is a simple and cost-effective solution for migrating electronic devices to this emerging world of networked device collaboration.

Built on Digi's 32-bit NET+ARM technology, the Digi Connect SP provides a powerful off-the-shelf hardware platform for standard plug and play device networking as well as a configurability for custom network applications. The award-winning NET+ARM architecture provides a seamless migration path to embedded modules and a fully-integrated system-on-a-chip solution.


The Digi Connect SP also provides as an easy user interface, product customization options, intelligent remote management and monitoring capabilities through the Digi Connectware[®] Manager device management software, full IPv6 support and standard management interfaces including SNMP.

Please contact us at 1-877-OEM-DIGI or 952-912-3444 for additional information or to discuss your application requirements.

Customizable Firmware Models

The Digi Connect SP device server is the ideal platform for custom web- and network-enabled applications. It eliminates the hardware design effort and delivers a true device networking solution that is powerful enough to meet your future performance requirements.

The Digi Connect SP Development Kit is an easy-to-use and royalty-free development platform that significantly reduces traditional design risk and accelerates the overall software development process. Based on Digi's NET+OS® development platform, it delivers the integrated building blocks and tools to quickly and cost effectively create flexible and secure embedded applications for integrated, high-performance web and networking solutions.

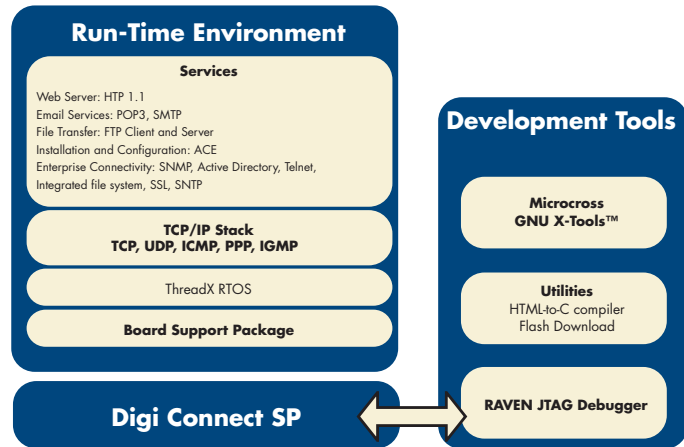

DEVELOPMENT KIT CONTENTS

- Digi Connect SP w/JTAG
- Macraigor Raven JTAG debugger
- NET+OS software components
 - Microcross™ GNU X-Tools with command line and visual GDB debugger
 - ThreadX® Real-Time Operating System with picokernel™ architecture
 - Fusion™ TCP/IP stack with full networking protocol and extended networking services support
 - TCP, UDP, ICMP, IGMP, DNS, SNMPv2, LDAP, POP, SMTP, PPP, FTP, SMTP, Telnet, FastIP, Fast Sockets, Multi-Homing
 - Universal IP address assignment through Address Configuration Executive (ACE)
 - Static IP, DHCP, BOOTP, Auto-IP, RARP, ARP/Ping
 - Allegro Software embedded web server with HTTPS support
 - SSL 3.0/TLS 1.0 with strong encryption
 - o DES (56-bit)
 - o 3DES (168-bit)
 - o AES (128/256-bit)
 - Flexible and robust file system supporting RAM and Flash (with wear leveling)
 - SMICng MIB compiler
 - Micro XML SAX parser
 - Additional utilities
 - HTML-to-C compiler
 - Flash download
 - Sample code
 - Documentation
 - Digi Connect SP Hardware Reference
 - NET+OS® Programmer's Guide
 - NET+OS API Reference
 - NET+OS Advanced Web Server Toolkit
 - NS7520 Hardware Reference
- Cables
 - Straight-thru and crossover serial cables
 - Straight-thru and crossover network cables
- Loop-back adapter
- Power supplies
- Significantly improves time-to-market by eliminating hardware design process
- Easy-to-use and royalty-free, out-of-the-box development kit solution
- Quick and cost-effective embedded application software development
- Seamless migration path to a fully integrated system-on-chip solution

MODEL.....PART NUMBERS

Model	North America	International
Digi Connect SP Development Kit (GNU) - Includes unit w/JTAG interface, hardware debugger, NET+OS platform CD, documentation, cables and power supplies	DC-SP-01-GN	DC-SP-01-GN
Units for Custom Applications		

Standard Firmware Models



The Digi Connect SP delivers a true plug-and-play device networking solution that combines a compact form factor with proven serial port connectivity. Unlike the similarly-sized Digi One® SP, the Digi Connect SP provides a more extended operating temperature range, IPv6 support, the ability to issue automated email alerts and SNMP traps, and unique product customization capabilities. These and other features make the Digi Connect SP an attractive solution for a broad range of applications in retail/POS, manufacturing, building security, government and medical.

SOFTWARE FEATURES

- Automated security alerts via email and SNMP traps
- IPv6 support for compatibility with next-generation networks
- Easy-to-use Digi plug-and-play firmware offers complete serial-to-network connectivity and unique product customization flexibility
- Strong SSL/TLS encryption with NIST-certified AES encryption for security sensitive environments
- Digi's patented RealPort® technology for COM/TTY port redirection and control
- Robust on-board TCP/IP stack with built-in web server
- Universal IP address assignment
 - Static IP, DHCP, Auto-IP
- Dynamic DNS support (DHCP Option 12)
- Secure web user interface (HTTP/HTTPS) with context-sensitive online help
- Pre-defined and custom device profiles
- Customizable web interface with optional Java applet support
 - File system w/512 kb user space
- Telnet command line interface
- Modem emulation and port logging
- Serial configuration interface
 - Command line, XML Remote Command Interface (RCI)
- User-defined network service/port configuration
 - HTTP/HTTPS, Telnet, Rlogin, Advanced Digi Discovery Protocol (ADDP), SNMP, RealPort, SSL/TLS, TCP/UDP
- TCP/UDP forwarding characteristics
 - Bytes, idle time, data pattern
- User-configurable TCP/UDP Socket ID
- Data pattern event notification via email/SNMP traps
- Intelligent SNMP device management
- Strong SSL/TLS based encryption
 - DES (56-bit), 3DES (168-bit), AES (128/256-bit)

MODEL.....PART NUMBERS

Model	North America	International
Digi Connect SP (RS-232 only)	DC-SP-01R-S	DC-SP-01R-S-W
Digi Connect SP (RS-232/422/485)	DC-SP-01-S	DC-SP-01-S-W
Digi Connect SP Bulk (25-unit pack w/ 25 power supplies)	DC-SP-01-S-25	DC-SP-01-S-W-25
Accessories		
Replacement Power Supply	76000737	76000738

Single-unit and bulk packs include unit with power supply.

Features/Specifications

HARDWARE

- 32-bit NET+ARM high-performance RISC processor (NS7520 55 MHz)
- 4 MB Flash and 16 MB RAM
- RS-232 or switch-selectable RS-232/422/485 serial interface (DB-9M connector)
 - Throughput up to 230,400 bps
 - 7/8 data bits
 - 1/1.5/2 stop bits
 - None/even/odd parity
 - Full signal support with software/hardware flow control
- Auto-sensing 10/100 Mbit Ethernet interface and network link
- Flexible 9-30VDC power supply

LEDs

- Network link
- Ethernet activity
- Power (red)

ENVIRONMENTAL

- Storage temperature: -40° C to 90° C (-40° F to 194° F)
- Operating temperature: 0° C to 60° C (32° F to 140° F)
- Relative humidity: 5% to 90% (non-condensing)
- Altitude: 12,000 Feet (3658 Meters)

REGULATORY APPROVALS

- FCC Part 15, Class A
- EN 55022
- EN5J024
- VCCI
- AS 3548
- UL60950
- CSA 22.2 NO. 60950
- EN 60950


POWER REQUIREMENTS

- 9-30VDC @ 370 mA
- Power supply included
 - North America: 120VAC
 - International: 90-264VAC

DIMENSIONS


Length: 3.876 in (9.846 cm)
 Width: 1.680 in (4.267 cm)
 Depth: 0.999 in (2.537 cm)
 Weight: 2.29 oz (6.50 g)

Digi Connect SP - Front

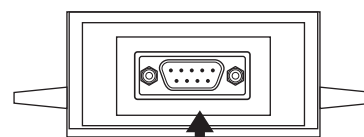

DB-9M

Digi Connect SP - Back

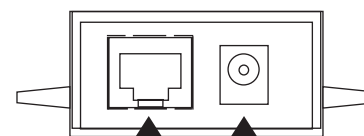



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.