

# Ultra Low Phase Noise XO / VCXO

**ABLNO**



**ESD Sensitive**



**RoHS Compliant**



9.2 x 14.8 x 5.5 mm SMT

## FEATURES:

- High "Q", 3rd Overtone Crystal Technology
- Ultra Low Phase Noise -162 dBc/Hz Typ. @ 10kHz offset, 100MHz carrier
- Standard LVCMOS RF Output
- Wide Operating Temperature (-40°C to +85°C) standard
- $\pm 28$  ppm Max. All inclusive Stability (including Aging) over 10-years
- Available Frequency range from 50MHz to 156.25MHz
- 9.2 x 14.8mm RoHS Compliant SMT package

## APPLICATIONS:

- Satellite Modem Communication Systems
- COTS - Military communications
- Avionics
- Low Phase Noise Signal Sources
- High Definition TV
- Test & Measurement
- Ultra Low Jitter RF Communication Circuitry

## STANDARD SPECIFICATIONS

| Parameters                     |                     | Minimum                                                                                                                                                       | Typical | Maximum | Units                | Notes                                     |
|--------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------|----------------------|-------------------------------------------|
| RF Output Frequency Range      |                     | 50.00                                                                                                                                                         |         | 156.250 | MHz                  |                                           |
| Standard Available Frequencies |                     | 50.00MHz, 80.00MHz, 81.92MHz, 92.16MHz, 96.00MHz, 98.304MHz, 100MHz, 104.00MHz, 106.25MHz, 120.00MHz, 122.88MHz, 125.00MHz, 150.00MHz, 155.52MHz & 156.250MHz |         |         |                      | Custom frequencies available upon request |
| Supply Voltage (Vdd)           |                     | 3.135                                                                                                                                                         | 3.300   | 3.465   | Volts                |                                           |
| Current Drain                  | 50MHz ~ 99.999MHz   |                                                                                                                                                               |         | 25.00   | mA                   |                                           |
|                                | 100MHz ~ 149.999MHz |                                                                                                                                                               |         | 35.00   |                      |                                           |
|                                | ≥ 150.00MHz         |                                                                                                                                                               |         | 40.00   |                      |                                           |
| Waveform                       |                     | LVCMOS                                                                                                                                                        |         |         |                      |                                           |
| Output Load                    |                     |                                                                                                                                                               |         | 15      | pF                   |                                           |
| V <sub>OH</sub>                |                     | 0.9*Vdd                                                                                                                                                       |         |         | Volts                |                                           |
| V <sub>OL</sub>                |                     |                                                                                                                                                               |         | 0.1*Vdd | Ω                    |                                           |
| Symmetry                       |                     | 45                                                                                                                                                            | 50      | 55      | %                    |                                           |
| Rise & Fall Times              |                     |                                                                                                                                                               |         | 3.0     | ns                   |                                           |
| Operating Temperature Range    |                     | -40                                                                                                                                                           |         | +85     | °C                   |                                           |
| Frequency Stability            |                     |                                                                                                                                                               |         |         |                      |                                           |
| Over (-40° C to +85°C)         |                     |                                                                                                                                                               | ±12.00  | ±18.00  | ppm                  | Relative to measured frequency @ 25°C     |
| ALL effects, including Aging   |                     |                                                                                                                                                               |         | ±28.00  | ppm                  |                                           |
| Storage Temperature Range      |                     | -40                                                                                                                                                           |         | +90     | °C                   |                                           |
| Aging                          | First Year          |                                                                                                                                                               |         | ±2.00   | ppm                  |                                           |
|                                | 5-Years             |                                                                                                                                                               |         | ±5.00   | ppm                  |                                           |
|                                | 10-Years            |                                                                                                                                                               |         | ±7.00   | ppm                  |                                           |
| Phase Noise (50MHz Carrier)    |                     |                                                                                                                                                               |         |         |                      | Vdd=3.3V                                  |
| @ 10                           | Hz offset           |                                                                                                                                                               | -90     | -82     | dBc/Hz               | <i>Note #1 &amp; #2</i>                   |
| @ 100                          | Hz offset           |                                                                                                                                                               | -120    | -115    | dBc/Hz               |                                           |
| @ 1,000                        | Hz offset           |                                                                                                                                                               | -145    | -140    | dBc/Hz               |                                           |
| @ 10,000                       | Hz offset           |                                                                                                                                                               | -165    | -160    | dBc/Hz               |                                           |
| @ 100,000                      | Hz offset           |                                                                                                                                                               | -166    | -165    | dBc/Hz               |                                           |
| @ 1,000,000                    | Hz offset           |                                                                                                                                                               | -166    | -165    | dBc/Hz               |                                           |
| rms Jitter (12kHz ~ 20MHz BW)  |                     |                                                                                                                                                               | < 100   | 125     | <i>Femto Seconds</i> | 0.125 ps Max.                             |



# Ultra Low Phase Noise XO / VCXO

**ABLNO**



**ESD Sensitive**



**RoHS Compliant**



9.2 x 14.8 x 5.5 mm SMT

| Parameters                             | Minimum | Typical  | Maximum | Units                | Notes                     |
|----------------------------------------|---------|----------|---------|----------------------|---------------------------|
| <b>Phase Noise (100MHz Carrier)</b>    |         |          |         |                      | Vdd=3.3V                  |
| @ 10 Hz offset                         |         | -88      | -82     | dBc/Hz               | <i>Note #1 &amp; #2</i>   |
| @ 100 Hz offset                        |         | -118     | -115    | dBc/Hz               |                           |
| @ 1,000 Hz offset                      |         | -141     | -138    | dBc/Hz               |                           |
| @ 10,000 Hz offset                     |         | -160     | -155    | dBc/Hz               |                           |
| @ 100,000 Hz offset                    |         | -161     | -160    | dBc/Hz               |                           |
| @ 1,000,000 Hz offset                  |         | -165     | -160    | dBc/Hz               |                           |
| rms Jitter (12kHz ~ 20MHz BW)          |         | < 50     | 100     | <i>Femto Seconds</i> | 0.10 ps Max.              |
| <b>Phase Noise (156.25MHz Carrier)</b> |         |          |         |                      | Vdd=3.3V                  |
| @ 10 Hz offset                         |         | -75      | -70     | dBc/Hz               | <i>Note #1 &amp; #2</i>   |
| @ 100 Hz offset                        |         | -110     | -105    | dBc/Hz               |                           |
| @ 1,000 Hz offset                      |         | -140     | -135    | dBc/Hz               |                           |
| @ 10,000 Hz offset                     |         | -155     | -150    | dBc/Hz               |                           |
| @ 100,000 Hz offset                    |         | -161     | -160    | dBc/Hz               |                           |
| @ 1,000,000 Hz offset                  |         | -165     | -160    | dBc/Hz               |                           |
| rms Jitter (12kHz ~ 20MHz BW)          |         | < 50     | 100     | <i>Femto Seconds</i> | 0.10 ps Max.              |
| <b>Electrical Frequency Adjustment</b> |         |          |         |                      |                           |
| Control Voltage Range (Vc)             | 0.0     | 1.65     | 3.30    | Volts                |                           |
| Frequency Pull Range                   | ±28.00  |          | ±55.00  | ppm                  | Referenced to the carrier |
| Frequency Pull Slope                   |         | Positive |         |                      |                           |
| Control Voltage Port Impedance         | 10      |          |         | kΩ                   |                           |
| Control Port Linearity                 |         |          | ±10     | %                    |                           |

**Note #1:** Maximum Phase Noise is verified on 100% of the parts at 25°C ± 3°C.

**Note #2:** The above specified Phase Noise & Jitter is with the oscillator device configured as a VCXO. In XO configuration, the Phase Noise will be slightly better at each offset between 10Hz and 10 kHz, by approximately -3dB to -5dB.



# Ultra Low Phase Noise XO / VCXO

ABLNO



ESD Sensitive




RoHS Compliant




9.2 x 14.8 x 5.5 mm SMT


## TYPICAL PHASE NOISE PERFORMANCE @ 50.00 MHz CARRIER

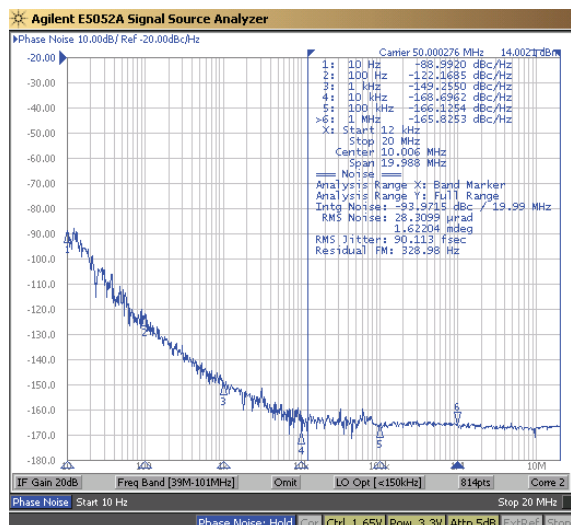


## TYPICAL PHASE NOISE PERFORMANCE @ 100.00 MHz CARRIER

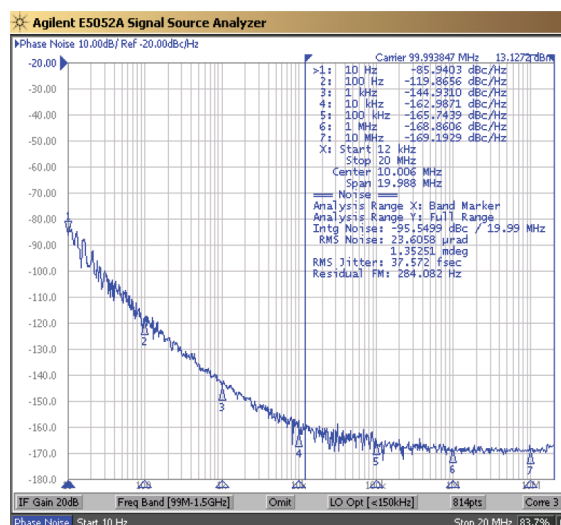

## FREQUENCY PULL VERSUS CONTROL VOLTAGE (REFERENCED TO 100.000MHz)

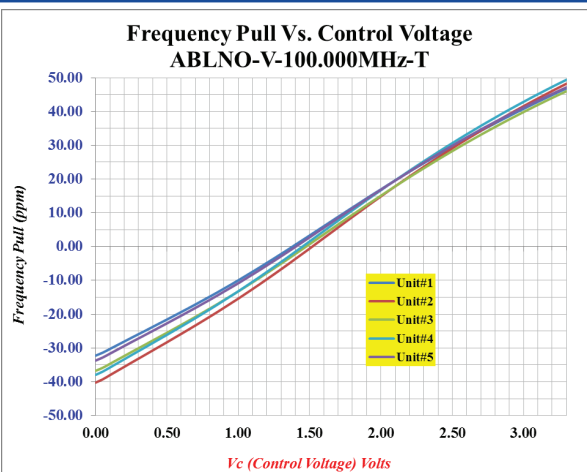

## CURRENT DRAIN VERSUS CONTROL VOLTAGE @ VDD = +3.3V

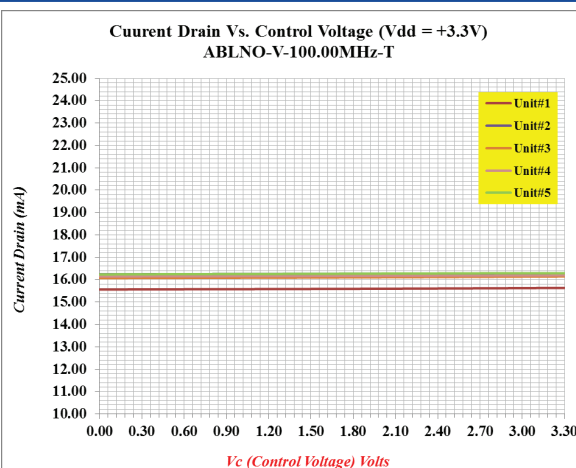

# Ultra Low Phase Noise XO / VCXO

**ABLNO**



**ESD Sensitive**



**RoHS Compliant**



9.2 x 14.8 x 5.5 mm SMT

## FREQUENCY STABILITY VS. TEMPERATURE @ VDD = +3.3V (REFERENCED TO MEASURED FREQUENCY @ 25°C)




## PART IDENTIFICATION:

ABLNO -      Frequency (MHz) -          

| Fixed Clock Vs. VCXO Option |                                |
|-----------------------------|--------------------------------|
| <b>Blank</b>                | Fixed Clock Oscillator         |
| <b>V</b>                    | VCXO ( $\pm 28$ ppm min. Pull) |

| Tape & Reel Options |                         |
|---------------------|-------------------------|
| Blank               | < 250 units on cut tape |
| T2                  | 250 units per reel      |
| T                   | 1,000 units per reel    |

## OUTLINE DIMENSIONS:

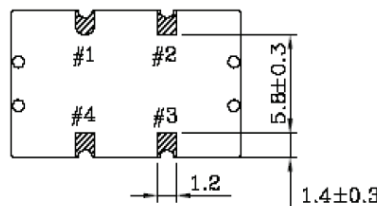

| Pin # | Functionality                                            |
|-------|----------------------------------------------------------|
| 1     | Voltage Control (Vc) for VCXO<br>No Connect (N/C) for XO |
| 2     | Ground                                                   |
| 3     | RF Output                                                |
| 4     | Vdd                                                      |

## Recommended Land Pattern



Dimensions: mm

# ABLNO



9.2 x 14.8 x 5.5 mm SMT

4°C/sec max

PRE-HEATING 183°C

4°C/sec max

Reflow 260°C max

10Sec


60~120Sec

Cooling

TOTAL TIME 210 Sec MAX

SOLDER MELTING FUSED 220°C

**(1,000) units per reel standard, (250) units per reel available (option # T2)**

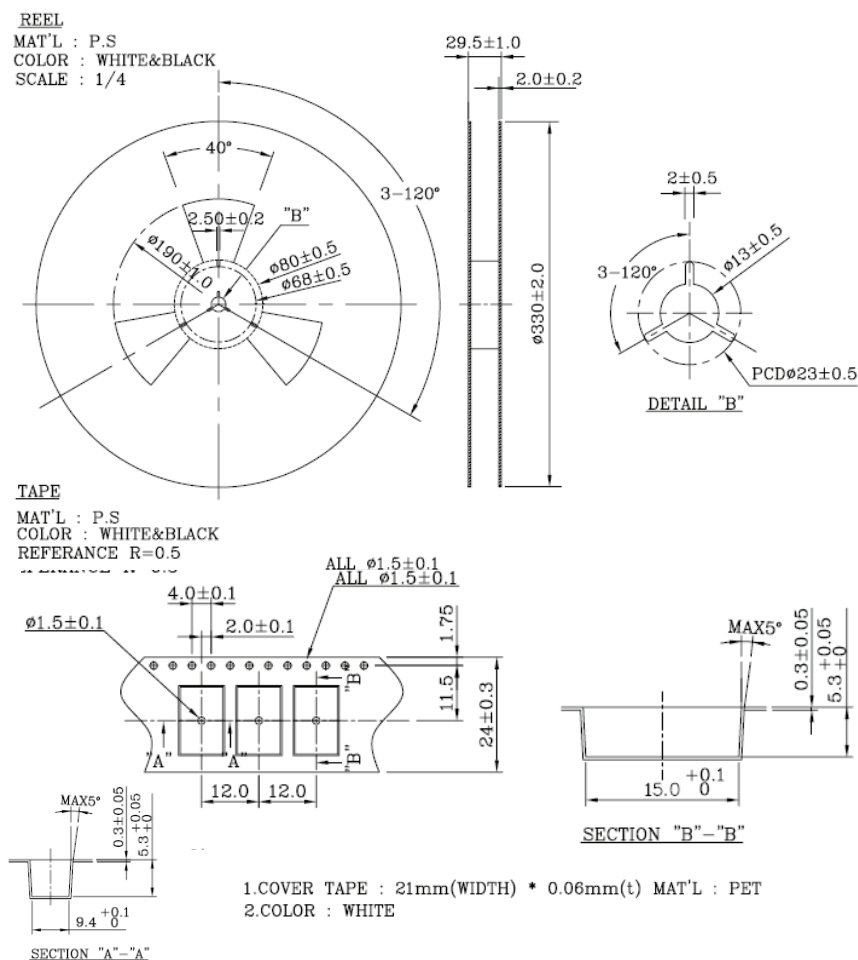

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.