

| Part* Number | DESC Drawing Number | Relay Description |
|-----------------|------------------------|---|
| CD00CFW | | Basic Solid-State Relay (SSR) |
| CD00CFY | 90091-008 | |
| CD01CFW | | SSR with Control Status |
| CD01CFY | 90091-006 | |
| CD20CDW | | SSR with Short-Circuit Protection |
| CD20CDY | 90091-004 | |
| CD21CDW | | SSR with Short-Circuit Protection and Control Status |
| CD21CDY | 90091-002 | |

* The Y suffix denotes parameters tested to MIL-PRF-28750 specifications.
The W suffix denotes parameters tested to Teledyne specifications.
For surface mount (SMT), add "S" prefix to part number. Example:
SCD00CFW

ELECTRICAL SPECIFICATIONS

(-55°C TO +105°C UNLESS OTHERWISE NOTED)

INPUT (CONTROL) SPECIFICATION

When used in 2 terminal configuration

| (TTL or direct control) (See Fig. 1) | Min | Typ | Max | Units |
|---|-----|-----|-----|-------|
| Input Current @ $V_{IN} = 5$ Vdc (See Fig. 2) | | 14 | 15 | mA |
| Turn-Off Voltage (Guaranteed Off) | | | 1.5 | Vdc |
| Turn-On Voltage (Guaranteed On) | 3.8 | | | Vdc |
| Reverse Voltage Protection | | | -32 | Vdc |
| Input Supply Range (See Note 4) | 3.8 | | 6 | Vdc |

INPUT (CONTROL) SPECIFICATION

When used in 3 terminal configuration

| (CMOS or open collector TTL) (See Fig. 1) | Min | Typ | Max | Units |
|---|-----|-----|-----|---------|
| Control Current | | | | |
| $V_{CONTROL} = 5$ Vdc | | | 250 | μ A |
| $V_{CONTROL} = 18$ Vdc | | | 1 | mA |
| Control Voltage Range | 0 | | 18 | Vdc |
| Bias Supply Voltage (See Note 4) | 3.8 | | 6 | Vdc |
| Bias Supply Current @ $V_{BIAS} = 5$ Vdc | | 14 | 15 | mA |
| Turn-Off Voltage (Guaranteed Off) | 3.2 | | | Vdc |
| Turn-On Voltage (Guaranteed On) | | | 0.3 | Vdc |



FEATURES

- Available with short circuit/current overload protection
- Available with input status monitor
- TTL and CMOS compatible control
- Low ON resistance power FET output
- Fast switching speed
- Meets 28 Vdc system requirements of MIL-STD-704
- Optical isolation
- Low profile hermetic ceramic package
- Built and tested to the requirements of MIL-PRF-28750

DESCRIPTION

This all solid-state relay utilizes the latest technology to provide a low ON resistance. The control (input) and load (output) are optically isolated to protect input logic circuits from voltage and current transients which can occur on the output supply. The optical isolation also provides a full floating output, thus allowing the load to be connected to either output terminal. The control circuit is buffered to enable the relay to be driven directly from standard CMOS or open collector TTL logic circuits. Available options include short circuit and current overload protection, which provides complete protection for both the relay and the system wiring. This feature not only provides protection should a short or overload occur while the relay is on, but will also provide protection should the relay be switched into a short. In either case, the relay will sense the short circuit condition and then block it indefinitely until the short is removed and the unit is reset by cycling the input control. The second option is a status output, which provides a built-in-test function. This feature checks the input circuitry of the relay and provides a logic (0) low when the input circuit is turned on and operational. Both options are available either together or separately as standard features.

OUTPUT (LOAD) SPECIFICATIONS



| (See Note 2) | Min | Typ | Max | Units |
|--|-----|------|------|-----------|
| Continuous Load Current (See Fig. 3) | | | | |
| CD20CD | | | 1.0 | Adc |
| CD21CD | | | 1.0 | Adc |
| CD00CF | | | 2.0 | Adc |
| CD01CF | | | 2.0 | Adc |
| Leakage Current @ $V_{LOAD} = 60$ Vdc | | | 40 | μ Adc |
| Output Voltage Drop | | | | |
| CD20CD | | | 0.6 | Vdc |
| CD21CD | | | 0.6 | Vdc |
| CD00CF | | | 0.75 | Vdc |
| CD01CF | | | 0.75 | Vdc |
| Continuous Operating Load Voltage | | | 60 | Vdc |
| Transient Blocking Voltage (See Note 3) | | | 80 | Vdc |
| ON Resistance R_{ds} (on) at $T_J = 25^\circ\text{C}$ $I_{LOAD} = 100$ mAdc (See Fig. 4) | | | | |
| CD20CD | | 0.36 | 0.45 | Ohm |
| CD21CD | | 0.36 | 0.45 | Ohm |
| CD00CF | | 0.16 | 0.22 | Ohm |
| CD01CF | | 0.16 | 0.22 | Ohm |

| | | | | |
|--|--------|--|-----------|---------------------------|
| Turn-On Time (See Fig. 5) | | | 1.5 | ms |
| Turn-Off Time (See Fig. 5) | | | 0.25 | ms |
| Electrical System Spike | | | ± 600 | Vdc |
| Output Capacitance at 25 Vdc, 100 KHz | | | 475 | pF |
| Input to Output Capacitance | | | 10 | pF |
| Dielectric Strength | 1000 | | | Vac |
| Insulation Resistance @ 500 Vdc | 10^9 | | | Ohm |
| Maximum Junction Temperature (T_J Max) | | | | |
| CD00 | | | 150 | $^\circ\text{C}$ |
| CD01 | | | 150 | $^\circ\text{C}$ |
| Thermal Resistance Junction to Ambient (θ_{JA}) | | | 80 | $^\circ\text{C}/\text{W}$ |
| Thermal Resistance Junction to Case (θ_{JC}) | | | 20 | $^\circ\text{C}/\text{W}$ |



STATUS OUTPUT SPECIFICATIONS

| (CD01CF AND CD21CD) | Min | Typ | Max | Units |
|---|-----|-----|-----|-----------|
| Status Supply Voltage (See Note 7) | | | 30 | Vdc |
| Status Leakage Current @ 15 Vdc | | | 4 | μ Adc |
| Status (sink) Current ($V_{SO} < 0.3$ Vdc) | | | 2 | mA |

BLOCK DIAGRAM (BOTTOM VIEW)

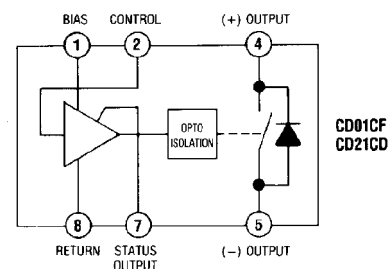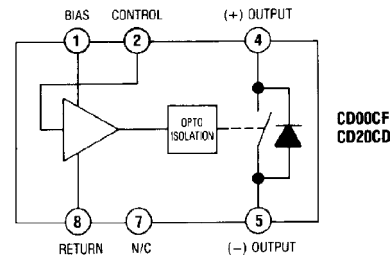

MECHANICAL SPECIFICATIONS

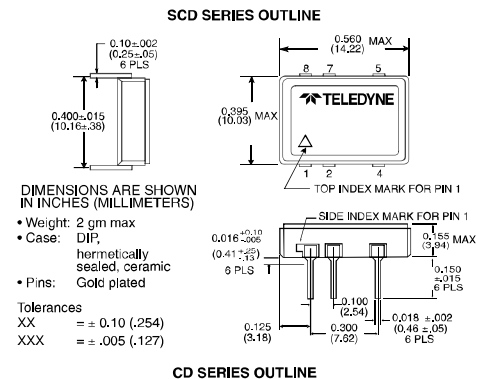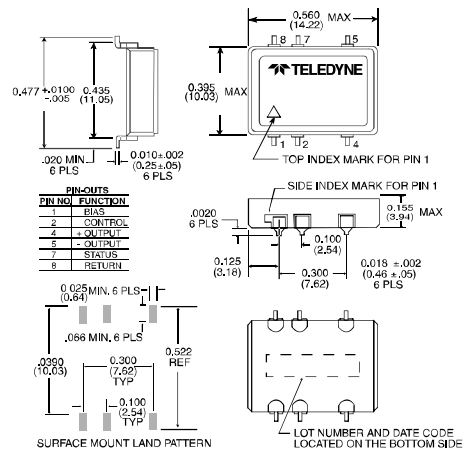

SHORT CIRCUIT SPECIFICATIONS

| (CD20CD AND CD21CD) | Min | Typ | Max | Units |
|---------------------------------------|-----|-----|-----|-------|
| Surge Current (See Fig. 7 and Note 6) | | 2.4 | | Adc |

ENVIRONMENTAL SPECIFICATIONS


| | Min | Typ | Max | Units |
|-----------------------|-----|-----|------|-------|
| Temperature Range | | | | |
| Operating | -55 | | +105 | °C |
| Storage | -55 | | +125 | °C |
| Vibration, 100 g | 10 | | 3000 | Hz |
| Constant Acceleration | | | 5000 | g |
| Shock, 0.5 ms | | | 1500 | g |

TABLE 1: STATUS OUTPUT TRUTH TABLE
(CD01CF AND CD21CD)



| Control Voltage | Output Status | Status Output Level |
|-----------------|---------------|----------------------------------|
| High | Off | High ($V_{SO} = V_{STATUS}$) |
| Low | On | Low ($V_{SO} \leq 0.3 V_{dc}$) |



INPUT CURRENT VS VOLTAGE
FIGURE 2 (SEE NOTE 4)

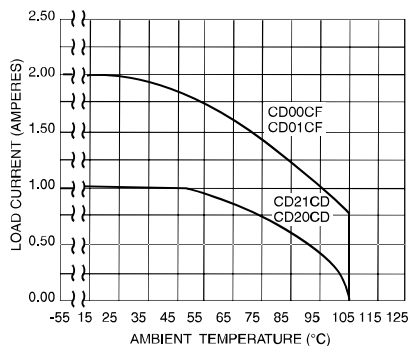

LOAD CURRENT DERATING CURVE
FIGURE 3

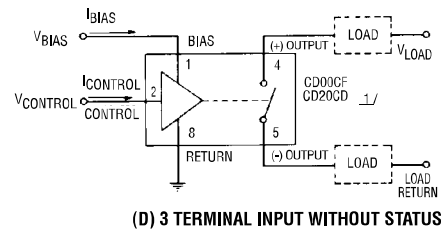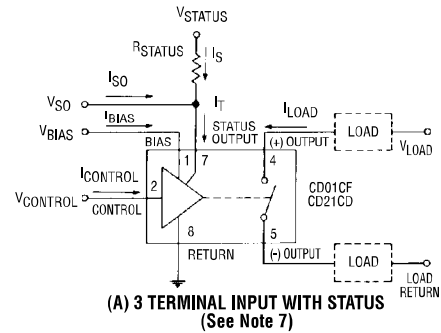


1/ CD21CD AND CD01CF MAY BE WIRED WITHOUT THE STATUS LINE AS SHOWN IN (C) AND (D)


WIRING CONFIGURATIONS
FIGURE 1 (SEE NOTE 8)




NORMALIZED ON RESISTANCE VS JUNCTION TEMPERATURE
FIGURE 4 (SEE NOTE 5)

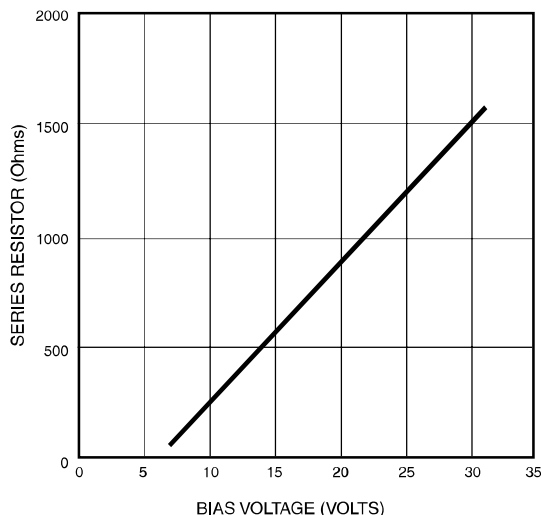

SERIES LIMIT BIAS RESISTOR VS BIAS VOLTAGE
FIGURE 8 (SEE NOTE 4)

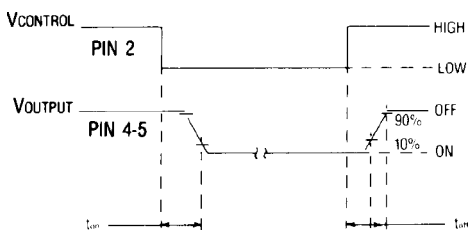

OUTPUT TURN-ON AND TURN-OFF TIMING
FIGURE 5

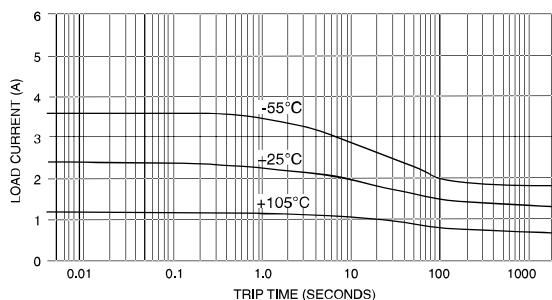

TRIP CURRENT VS TIME
FIGURE 7 (SEE NOTE 6)

NOTES:

- Control input is compatible with CMOS or open collector TTL (with pull up resistor).
- The rated input voltage is 5V for all tests unless otherwise specified.
- Transient blocking voltage tests are performed per MIL-STD-704 (28 Vdc systems).
- For bias voltages above 6V, a series resistor is required. Use the standard resistor value equal to or less than the value found from Figure 8.
- To calculate the maximum ON resistance for a given junction temperature, find the normalized ON resistance factor (NR) from Figure 4. Calculate the new ON resistance as follows:
 (CD00CD, CD01CD) $R_{(ON)} = NR \cdot R_{ON} @ 25^{\circ}C$
 (CD20CD, CD21CD) $R_{(ON)} = 0.2 \cdot NR + 0.21$
- Overload testing to the requirements of MIL-PRF-28750 is constrained to the limits imposed by the short circuit protection characteristics as defined in this specification. System series inductance for "shorted-load" mode of operation should be 30 μ H maximum. Maximum repetition rate into a shorted load should not exceed 10 Hz.
- A status pull up resistor is required for proper operation of the status output. Determine the current (I_{so}) required by the status interface. Calculate the current (I_s) through the status resistor such that the sink current through the status output is 2 mA. Select the status resistor such that it does not allow more than 2 mA to flow through the status output.

$$R_{STATUS} = \frac{V_{STATUS} - 0.3V}{2 mA - I_{so}}$$
- Inductive loads should be diode suppressed. Input transitions should be \leq 1 ms duration and the input drive should be a bounceless contact type.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.