


# POWERFUL AND SMALL

# conga-MA3

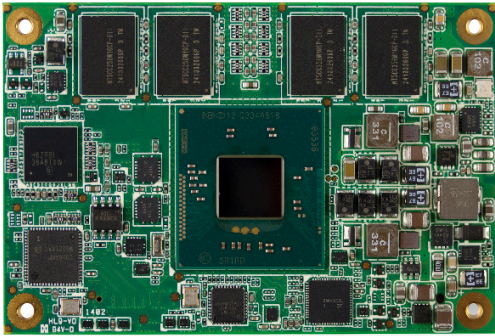


- 3<sup>rd</sup> Gen. Intel® Atom™ | Intel® Celeron® processor family
- COM Express Mini Type 10 module
- High resolution Intel® Gen. 7 graphics
- Temperature range up to -40°C .. +85°C

**COM**  **Express®**

|                           |                                                                                                                                                                                                                         |                     |                |          |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------|----------|
| Formfactor                | Formfactor COM Express® Mini   (55 x 84 mm)   Type 10                                                                                                                                                                   |                     |                |          |
| CPU                       | Intel® Atom™ E3845                                                                                                                                                                                                      | 1.91GHz Quad Core   | L2 cache 2MB   | 10W TDP  |
|                           | Intel® Atom™ E3827                                                                                                                                                                                                      | 1.75GHz Dual Core   | L2 cache 1MB   | 8W TDP   |
|                           | Intel® Atom™ E3826                                                                                                                                                                                                      | 1.46GHz Dual Core   | L2 cache 1MB   | 7W TDP   |
|                           | Intel® Atom™ E3815                                                                                                                                                                                                      | 1.46GHz Single Core | L2 cache 512kB | 5W TDP   |
|                           | Intel® Celeron® N2930                                                                                                                                                                                                   | 1.86GHz Quad Core   | L2 cache 2MB   | 7.5W TDP |
| DRAM                      | Onboard DDR3L memory support for up to 8 GByte with 1333MT/s                                                                                                                                                            |                     |                |          |
| Chipset                   | Integrated in SoC                                                                                                                                                                                                       |                     |                |          |
| Onboard storage           | eMMC 4.51 interface   up to 64GB of MLC NAND   up to 4GB of SLC NAND                                                                                                                                                    |                     |                |          |
| Ethernet                  | Intel I210 Gigabit Ethernet                                                                                                                                                                                             |                     |                |          |
| I/O Interfaces            | Up to 4x PCIe x1 lanes with 5 Gb/s PCI Express 2.0   2x SATA 2.0 3Gb/s ports   7x USB 2.0   1x USB 3.0   LPC   SPI   I <sup>2</sup> C bus (fast mode 400 kHz, multi-master)   SDIO                                      |                     |                |          |
| Sound                     | Digital High Definition Audio Interface                                                                                                                                                                                 |                     |                |          |
| Graphics                  | Intel® HD Graphics Gen 7   Full hardware acceleration for MPEG2   H.264   DirectX11   OCL 1.2   OGL 3.2   WMV9 and VC1                                                                                                  |                     |                |          |
| LVDS                      | Single channel LVDS transmitter   support for flat panels with 1x18 bit/1x24 bit data mapping up to a resolution of 1920x1200@60Hz.                                                                                     |                     |                |          |
| Digital Display Interface | Displayport 1.1 up to 2560x1600 or HDMI 1.4a / DVI up to 1920x1200                                                                                                                                                      |                     |                |          |
| congatec Board Controller | Multi Stage Watchdog   non-volatile User Data Storage   Manufacturing and Board Information   Board Statistics   BIOS Setup Data Backup<br>I <sup>2</sup> C bus (fast mode, 400 kHz, multi-master)   Power Loss Control |                     |                |          |
| Embedded BIOS Features    | OEM Logo   OEM CMOS Defaults   LCD Control   Display Auto Detection   Backlight Control   Flash Update   based on AMI Aptio UEFI                                                                                        |                     |                |          |
| Power Management          | ACPI 5.0 with battery support                                                                                                                                                                                           |                     |                |          |
| Operating Systems         | Microsoft® Windows® 8   Microsoft® Windows® 7   Linux   Microsoft® Windows® Embedded Standard   Microsoft® Windows® 7 Embedded Compact                                                                                  |                     |                |          |
| Power Consumption         | Typ. application: see user's guide for full details                                                                                                                                                                     |                     |                |          |
| Temperature               | Commercial : Operating: 0 to +60°C   Storage: -20 to +80°C<br>Industrial : Operating: -40 to +85°C   Storage: -45 to +85°C                                                                                              |                     |                |          |
| Humidity                  | Operating: 10 - 90% r. H. non cond.   Storage: 5 - 95% r. H. non cond.                                                                                                                                                  |                     |                |          |
| Size                      | 55 x 84 mm (2.17" x 3.31")                                                                                                                                                                                              |                     |                |          |

# conga-MA3 | Block diagram

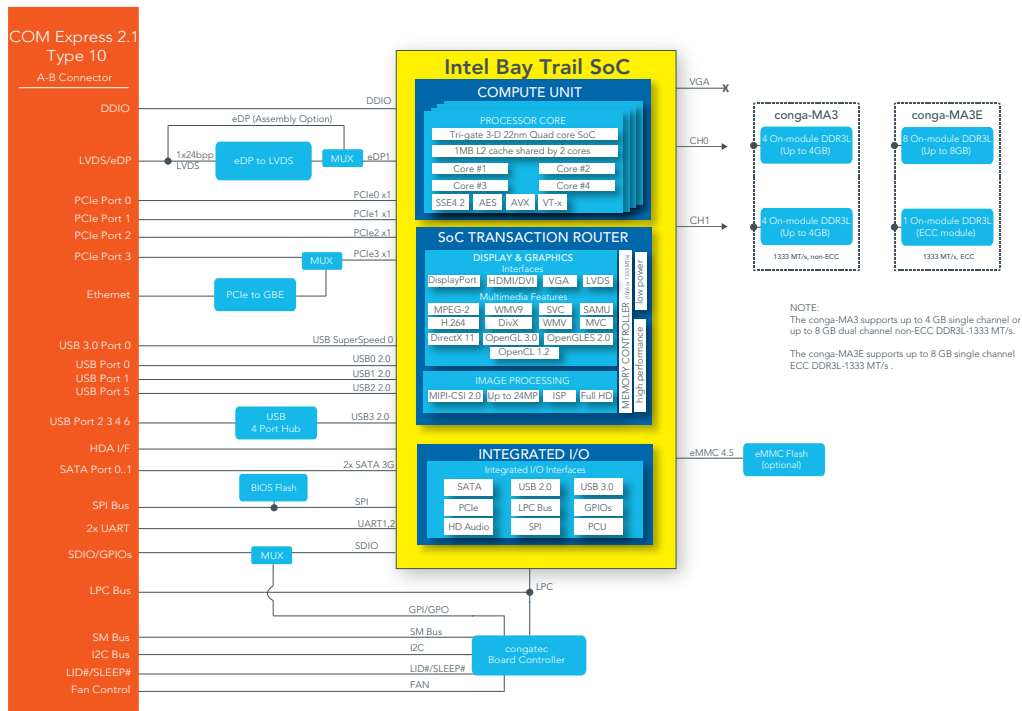

# conga-MA3 | Order Information

| Article                            | PN     | Description                                                                                                                                                                               |
|------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| conga-MA3/E3845-4G eMMC8           | 047400 | Intel® Atom™ E3845 quad core processor with 1.91GHz   2MB L2 cache   4GB 1333MT/s DDR3L onboard memory and 8GB eMMC onboard flash.                                                        |
| conga-v MA3/E3827-2G eMMC4         | 047401 | Intel® Atom™ E3827 dual core processor with 1.75GHz   1MB L2 cache   2GB 1333MT/s DDR3L onboard memory and 4GB eMMC onboard flash.                                                        |
| conga-MA3/E3826-2G eMMC4           | 047402 | Intel® Atom™ E3826 dual core processor with 1.46GHz   1MB L2 cache   2GB 1066MT/s DDR3L onboard memory and 4GB eMMC onboard flash.                                                        |
| conga-MA3/E3815-2G                 | 047404 | Intel® Atom™ E3815 single core processor with 1.46GHz   512kB L2 cache   2GB 1066MT/s DDR3L onboard memory.                                                                               |
| conga-MA3/N2930-2G                 | 047406 | Intel® Celeron® N2930 quad core processor with 1.83GHz up to 2.16GHz   2MB L2 cache and 2GB 1333MT/s DDR3L onboard memory. Low power consumption with 7.5W TDP                            |
| conga-MA3/N2807-2G                 | 047407 | Intel® Celeron® N2807 single core processor with 1.58GHz up to 2.16GHz   1MB L2 cache and 2GB 1333MT/s DDR3L onboard memory. Low power consumption with 4.3W TDP                          |
| conga-MA3/i-E3845-4G eMMC8         | 047410 | Intel® Atom™ E3845 quad core processor with 1.91GHz   2MB L2 cache   4GB 1333MT/s DDR3L onboard memory and 8GB eMMC onboard flash. Industrial grade temperature range from -40°C to 85°C. |
| conga-MA3/i-E3827-2G eMMC4         | 047411 | Intel® Atom™ E3827 dual core processor with 1.75GHz   1MB L2 cache   2GB 1333MT/s DDR3L onboard memory and 4GB eMMC onboard flash. Industrial grade temperature range from -40°C to 85°C  |
| conga-MA3/i-E3845-2G eMMC4         | 047413 | Intel® Atom™ E3845 quad core processor with 1.91GHz   2MB L2 cache   2GB 1333MT/s DDR3L onboard memory and 4GB eMMC onboard flash. Industrial grade temperature range from -40°C to 85°C. |
| conga-MA3/i-E3815-2G               | 047414 | Intel® Atom™ E3815 single core processor with 1.46GHz   512kB L2 cache   2GB 1066MT/s DDR3L onboard memory. Industrial grade temperature range from -40°C to 85°C.                        |
| conga-MA30/HSP-T                   | 047450 | Standard heatspreader for COM Express Type 10 module conga-MA3. All standoffs are M2.5 thread.                                                                                            |
| conga-MA30/HSP-B                   | 047451 | Standard heatspreader for COM Express Type 10 module conga-MA3. All standoffs are 2.7mm bore hole.                                                                                        |
| conga-MA30/CSP-T                   | 047452 | Standard passive cooling solution for COM Express Type 10 module conga-MA3 with fins. All standoffs are M2.5mm thread.                                                                    |
| conga-MA30/CSP-B                   | 047453 | Standard passive cooling solution for COM Express Type 10 module conga-MA3 with fins. All standoffs are 2.7mm bore hole.                                                                  |
| <b>Accessories</b>                 |        |                                                                                                                                                                                           |
| conga-MEVAL                        | 065400 | Evaluation carrier board for Type 10 COM-Express-modules                                                                                                                                  |
| conga-LDVI/EPI                     | 011115 | LVDS to DVI converter board for digital flat panels with onboard EEPROM                                                                                                                   |
| COM-Express-carrier-board-Socket-5 | 400007 | Connector for COM-Express carrier boards   height 5mm   packing unit 4 pieces                                                                                                             |
| COM-Express-carrier-board-Socket-8 | 400004 | Connector for COM-Express carrier boards   height 8mm   packing unit 4 pieces                                                                                                             |

© 2014 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. November 04, 2014 MR



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.