

## SPECIFICATION

Part No. : **AP17E.07.0064A**

Product Name : 17mm One Stage GPS/GALILEO Active Patch  
Antenna Module with Front End SAW Filter

Features : 17mm\*17mm\*6.3mm  
64mm 1.13 IPEX MHFI  
Wide Voltage 1.8V~5.5V  
15dB LNA  
Tested in Free space  
ROHS Compliant



## 1. Introduction


The AP.17E is a one stage 17mm active patch antenna that has been designed specifically for embedded (inside device) integration with GPS/GALILEO receiver modules.

The AP.17E combines a 17\*17\*4mm advanced low profile ceramic patch antenna with a one stage LNA and a front-end SAW filter with ultra thin coaxial cable. It comes with it's own integrated ground-plane. The front end SAW filter reduces the risks where there is a cellular transmitter nearby of interference from out of band frequencies which can cause LNA burn-out, saturation, or radiated spurious emissions.

The antenna can work on a wide input voltage from 1.8V to 5.5V with best in class power consumption figures.

If further tuning and optimization specific to a customer device is required Taoglas offers a custom tuned and optimized part service. Contact [sales@taoglas.com](mailto:sales@taoglas.com) for more information.

Cables and connectors can be customized according to request.

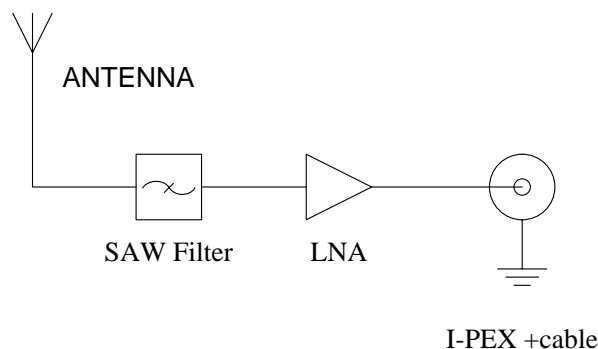


## 2. Specification


ELECTRICAL			
Input Voltage	Min:1.8V Typ.: 3.0V Max: 5.5V		
Frequency Range	1575.42MHz +/- 1.023 MHz		
Gain	-1.0dBic Typ. @zenith		
Polarization	RHCP		
Axial ratio	Max 3.0dB@zenith		
Frequency Range	1575.42MHz +/- 1.023 MHz		
Gain (With LNA)	At 90°	At 5.5V	16 ± 3dBic
		At 3.0V	15 ± 3dBic
		At 1.8V	12 ± 3dBic
Output Impedance	50Ω		
LNA			
Frequency	1575.42 ± 1.023MHz		
Outer Band Attenuation	F0=1575.42MHz		
	F0±30MHz	2dB min.	
	F0±50MHz	18dB min.	
	F0±100MHz	25dB min.	
Output Impedance	50Ω		
Output VSWR	2.0 Max		
Pout at 1dB Gain	Typ. -2dBm		
Compression point	Min. -6dBm		
LNA Gain, Power Consumption and Noise Figure			
Voltage	LNA Gain (Typ)	Power Consumption	Noise Figure Typ
		(mA) Typ	
Min. 1.8V	13dB	1.6mA	2.5dB
Typ. 3.0V	16dB	3.5mA	2.5dB
Max. 5.5V	17dB	7.6mA	2.6dB

MECHANICAL	
Dimensions	17mm*17mm*6.3mm
RF Cable	Ø1.13 RF Coaxial Cable L=64mm±2.5mm
RF Connector	IPEX MHFI
ENVIRONMENTAL	
Operation Temperature	-40°C to + 85°C
Storage Temperature	-40°C to + 85°C
Relative Humidity	40% to 95%

## 2.1. LNA Gain and Out Band Rejection @3.0V

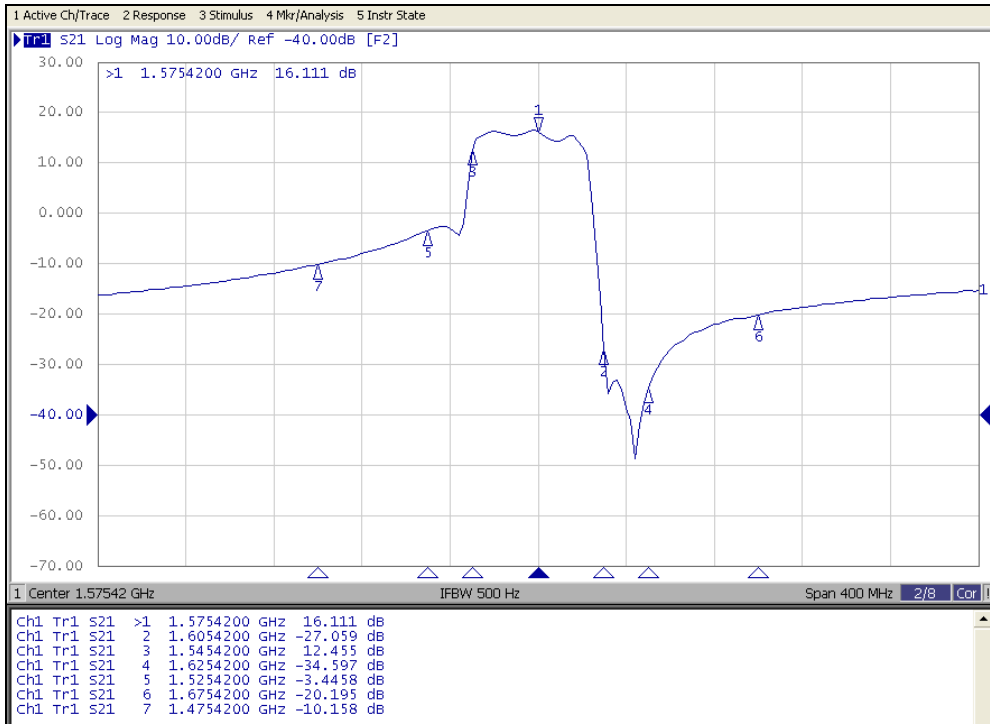


## 2.2. LNA Noise Figure @3.0V

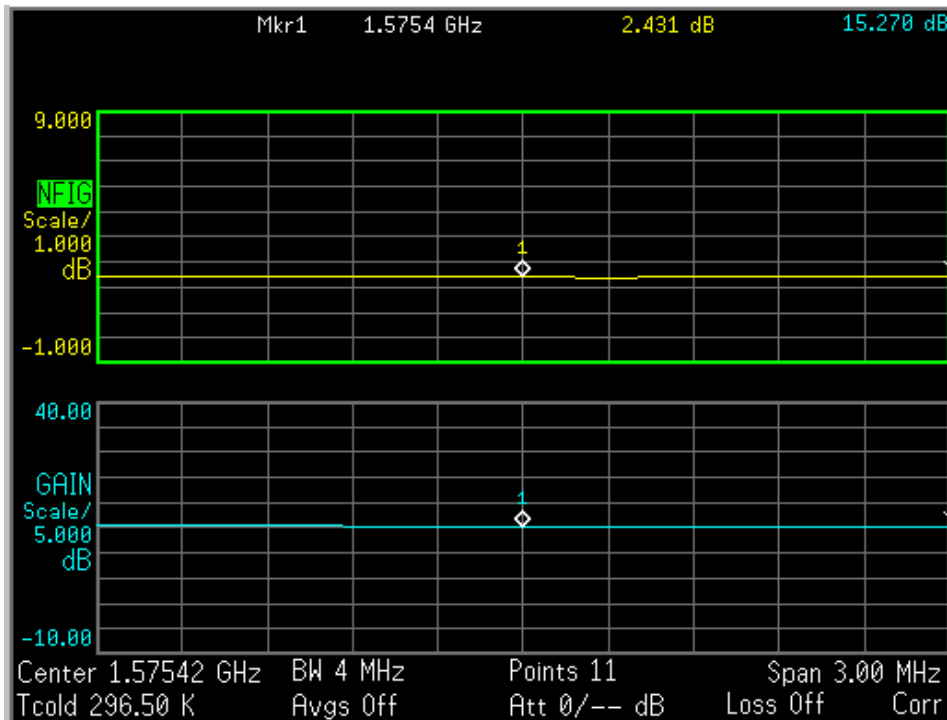


### 3. Radiation Patterns


XY Plane

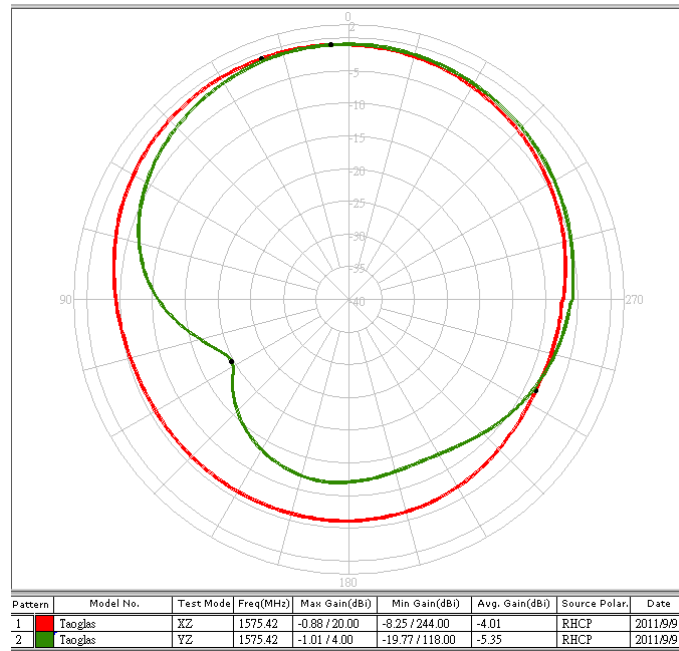

XZ Plane

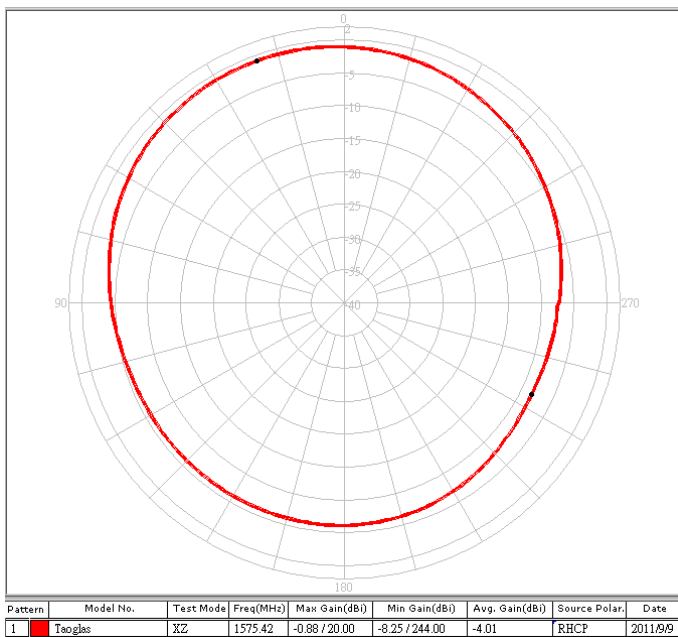

YZ Plane

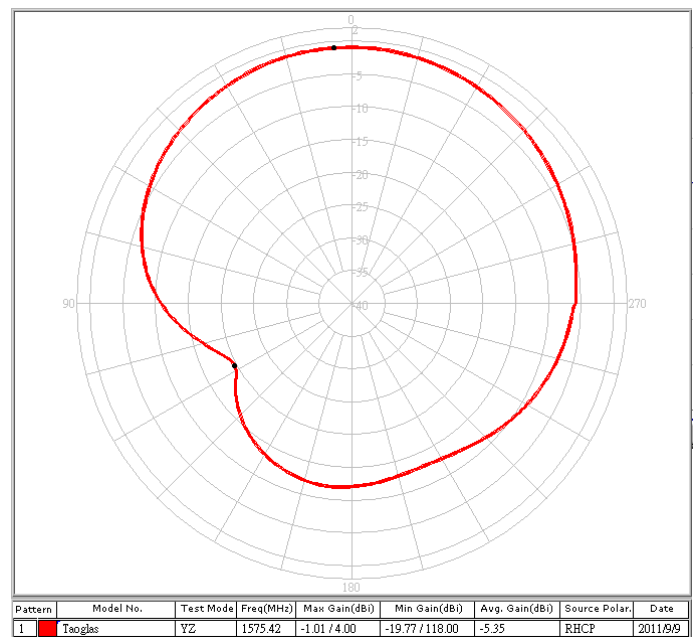


## 4. Plugs Usage Precautions

### 4.1. Mating / Unmating


(1) To disconnect connectors, insert the end portion of I-PEX under the connector flanges and pull off vertically, in the direction of the connector mating axis.

(2) To mate the connectors, the mating axes of both connectors must be aligned and the connectors can be mated. The "click" will confirm fully mated connection. Do not attempt to insert on an extreme angle.

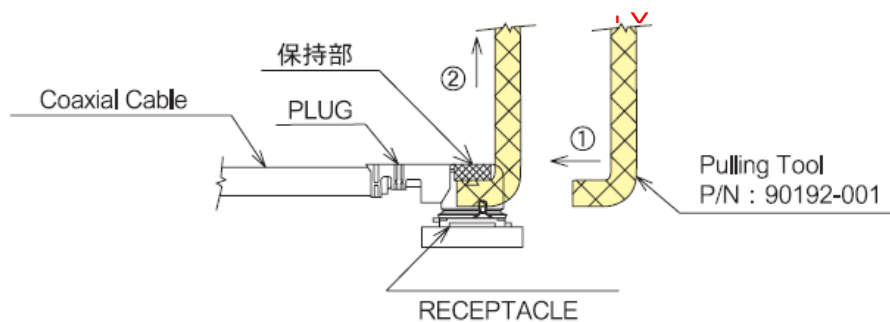


### 4.2. Pull forces on the cable after connectors are mated


After the connectors are mated, do not apply a load to the cable in excess of the values indicated in the diagram below.

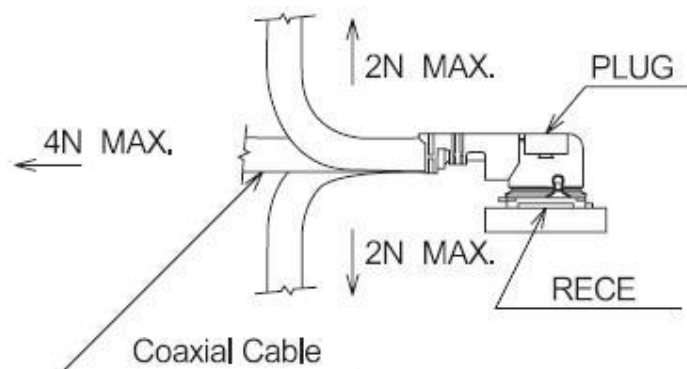

## 5. Mechanical Drawing (Unit: mm)

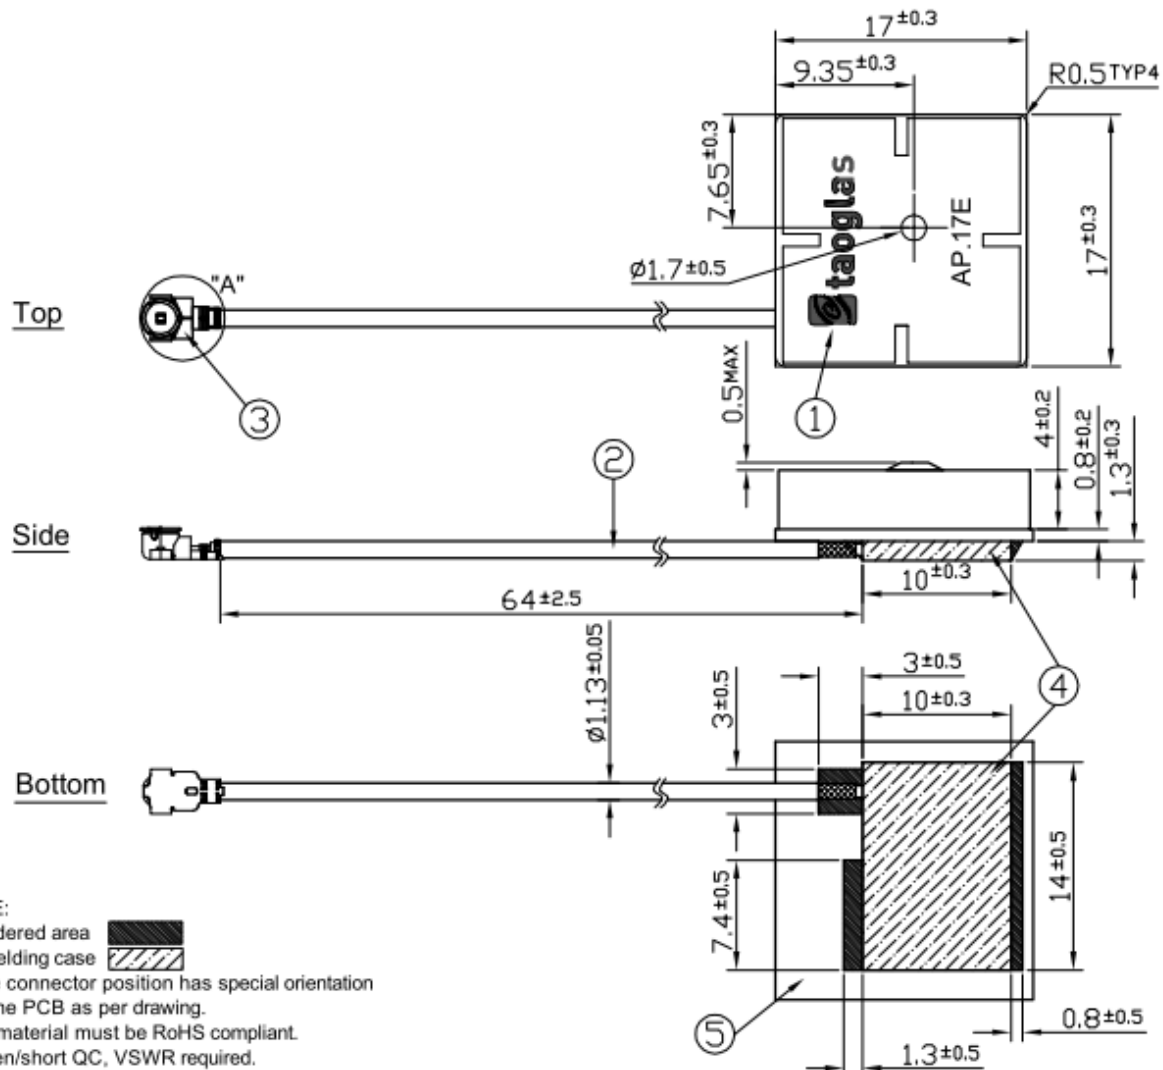


	Name	P/N	Material	Finish	QTY
1	AP.17E Patch (17*17*4mm)	AP.17E	Ceramic	Clear	1
2	1.13 Coaxial Cable	OD.113.J	FEP	Gray	1
3	IPEX MHF1 Connector	IPEX.MHF1.113	Brass	Gold Plated	1
4	Shielding Case		Tin (SPTE)	Tin Plated	1
5	PCB		FR4 0.8t	Green	1

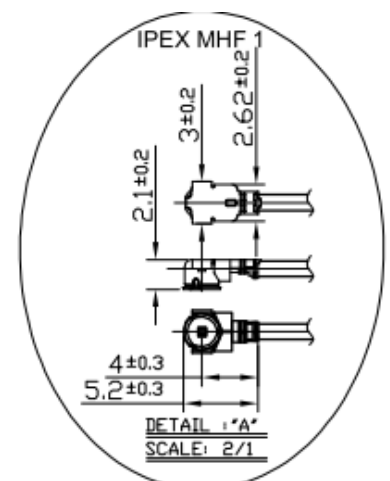




## 6. Packaging


60 pc AP.17E.07.0064A in Vacuum Bag  
 Dimensions - 370\*300mm  
 Weight - 534Kg

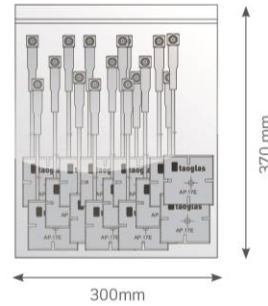


Batch of 2, 120pc AP.17E.07.0064A in Vacuum Bags  
 Dimensions - 370\*300mm  
 Weight - 1.1Kg

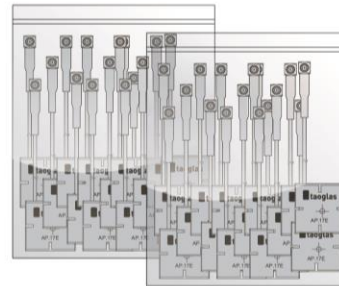

10 Vacuum Bags  
 600 pcs in one carton  
 Carton Dimensions - 390\*320\*290mm  
 Weight - 6.3Kg

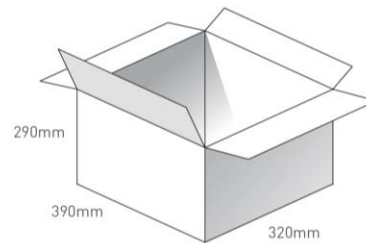

Pallet Dimensions 1200\*1000\*1360mm  
 36 Cartons per Pallet  
 9 Cartons per layer  
 4 Layers

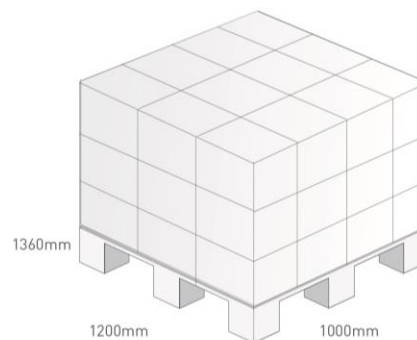

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.