

# EPC-T3285

## 1U thin Mini-ITX Chassis with One Expansion Slot



### Features

- 1U chassis support thin mini-ITX board
- Easy device installation (e.g. mini-PCIe, mSATA...)
- One expansion slot (Full height)
- Rich I/O connectivity with additional USB, COM Ports and RF options incl. antennas
- Optional Wide power 9~36V DC input
- Supports Intel® 7th & 6th Gen Core™ i processor (LGA1151) with Intel H110 chipset



WISE-PaaS/RMM CE FCC RoHS COMPLIANT PRODUCT

### Specifications

|                          |                                     |  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|--------------------------|-------------------------------------|--|-----------------------|----------------------|-----------------------|-----------------------|-----------------------|------------------|--------------------|------------------|--------------------|
| Model Name               | EPC-T3285                           |  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
| Order Number             | Ordering Information shown as below |  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
| Drive Bay                | HDD/SSD                             | 2.5" HDD/SSD x2, or 2.5" HDD/SSD x1, or 3.5" HDD/SSD x1              |                       |                      |                       |                       |                       |                  |                    |                  |                    |
| Cooling                  | Fan                                 | 2 (4cm/2000rpm)  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
| System Spec              | CPU                                 | i7-7700/<br>7700T  | i7-6700/<br>i7-6700TE | i5-7500/<br>i5-7500T | i5-6500/<br>i5-6500TE | i3-7101/<br>i3-7101TE | i3-6100/<br>i3-6100TE | Pentium<br>G4400 | Pentium<br>G4400TE | Celeron<br>G3900 | Celeron<br>G3900TE |
|                          | Core Number                         | 4/4  | 4/4                   | 4/4                  | 4/4                   | 2/2                   | 2/2                   | 2                | 2                  | 2                | 2                  |
|                          | Max Speed                           | 3.6GHz/<br>2.9GHz  | 3.4GHz/<br>2.4GHz     | 3.4GHz/<br>2.7GHz    | 3.2GHz/<br>2.3GHz     | 3.9GHz/<br>3.4GHz     | 3.7GHz/<br>2.7GHz     | 3.3G             | 2.4G               | 2.8G             | 2.6G               |
|                          | TDP                                 | 65W/35W  | 65W/35W               | 65W/35W              | 65W/35W               | 54W/35W               | 51W/35W               | 54W              | 35W                | 51W              | 35W                |
|                          | Memory                              | Two 260-pin SO-DIMM up to 32GB DDR4 2133MHz SDRAM                    |                       |                      |                       |                       |                       |                  |                    |                  |                    |
| Front IO                 | USB                                 | 4  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Serial                              | 2  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | WLAN Antenna                        | 2 (Optional)   |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Miscellaneous                       | Power Switch, Reset button, Power LED, HDD LED                       |                       |                      |                       |                       |                       |                  |                    |                  |                    |
| Rear IO                  | HDMI                                | 1  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Display Port 1.2                    | 1  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Ethernet                            | 2  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | USB                                 | 4 (USB3.0)   |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Audio                               | 2 (Mix in, Line out)   |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Phoenix Connector                   | 1 (Optional Wide power DC 9~36V input)                               |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | DC Power Jack                       | 1  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
| Environment              | Expansion slot                      | 1 (Full height; 185L x 111.15W x 16.1H mm); AIMB-285 support PCIe x4 |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Operating Temperature               | Depend on different HDD/SSD/ PCIe expansion card combination         |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Non-operating Temperature           | -20 ~ 60 °C (-4 ~ 140 °F)  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Humidity                            | 10 ~ 85% @ 40 °C, non-condensing                                     |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Vibration (5 ~ 500 Hz)              | 1 Grms (HDD*1); 0.5 Grms (HDD*2)                                     |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Shock                               | 10G (with 11ms duration, half sine wave)                             |                       |                      |                       |                       |                       |                  |                    |                  |                    |
| Physical Characteristics | Certification                       | CE/FCC   |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Dimensions (W x H x D)              | 330 x 44 x 270 mm  |                       |                      |                       |                       |                       |                  |                    |                  |                    |
|                          | Weight                              | 5.68kg   |                       |                      |                       |                       |                       |                  |                    |                  |                    |

\* Bottom drive bay supports max. 7mm height HDD.

### Front View



### Internal View




### Rear View



## Dimensions

Unit: mm [inch]

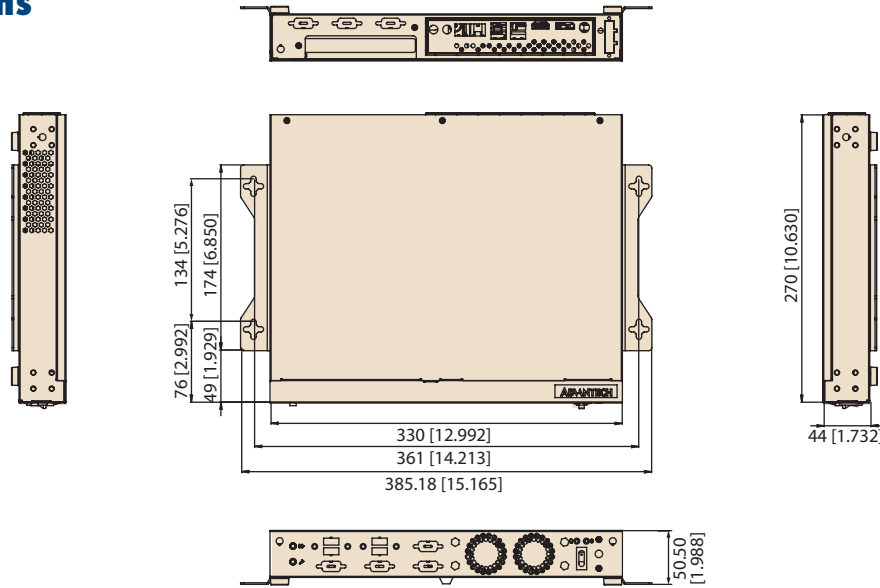


## Driver bay and Expansion card combination

| Model     | CPU TDP | Storage      | PCIe expansion | Operating temperature | Max. PCIe Card Dimension    |
|-----------|---------|--------------|----------------|-----------------------|-----------------------------|
| EPC-T3285 | 65W     | 1 x 2.5" HDD | V              | 0 ~ 40 °C**           | 185L x 111.15W x 16.1H (mm) |
|           | 65W     | 1 x 2.5" SSD | V              | 0 ~ 40 °C**           | 185L x 111.15W x 16.1H (mm) |
|           | 65W     | 1 x mSATA    | V              | 0 ~ 40 °C**           | 185L x 111.15W x 16.1H (mm) |
|           | 65W     | 2 x 2.5" HDD | X              | 0 ~ 45 °C             | none                        |
|           | 65W     | 2 x 2.5" SSD | X              | 0 ~ 45 °C             | none                        |
|           | 65W     | 1 x 3.5" HDD | X              | 0 ~ 45 °C             | none                        |
| EPC-T3285 | 35W     | 1 x 2.5" HDD | V              | 0 ~ 40 °C**           | 185L x 111.15W x 16.1H (mm) |
|           | 35W     | 1 x 2.5" SSD | V              | 0 ~ 40 °C**           | 185L x 111.15W x 16.1H (mm) |
|           | 35W     | 1 x mSATA    | V              | 0 ~ 40 °C**           | 185L x 111.15W x 16.1H (mm) |
|           | 35W     | 2 x 2.5" HDD | X              | 0 ~ 45 °C             | none                        |
|           | 35W     | 2 x 2.5" SSD | X              | 0 ~ 45 °C             | none                        |
|           | 35W     | 1 x 3.5" HDD | X              | 0 ~ 45 °C             | none                        |

\*\* Base on Expansion card's max Thermal Spec 50 °C

## Optional PCIe Card

| Part Number        | Description                               |
|--------------------|---|
| GFX-A3T5-71FST1    | HD5450 512MB PCI-E 1X DVII+HDMI+VGA FS(G) |
| 96RC-SAS-4P-PE-AD1 | ADAPTEC 6405E SAS 4PORT 6GB/S PCIEX1(G)   |
| 96NIC-1G-PE-IN     | INTEL NIC 10/100/1000M PCIEx1 DESKTOP(G)  |
| PCI-E-1674E-AE     | 4-port PCI express GbE card               |
| PCI-E-1680-AE      | 2-Port CAN-Bus PCI-E card w/ Isolation    |

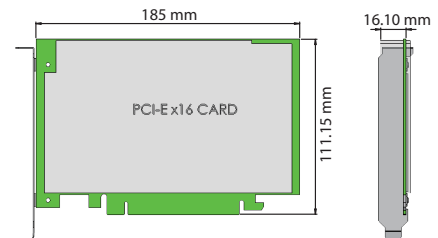

## Ordering Information

| Model Name | Part Number       | CPU           | Memory/HDD | Power Board | Adapter | Power input    | Certification |
|------------|-------------------|---------------|------------|-------------|---------|----------------|---------------|
| EPC-T3285  | EPC-T3285CA-00Y1E | Celeron G3900 | X          | X           | X       | 2.5Ø           | CE/FCC        |
|            | EPC-T32855A-00Y0E | i5-7500T      | X          | X           | X       | 2.5Ø           | CE/FCC        |
|            | EPC-T32855A-15Y1E | i5-7500T      | X          | V           | X       | Terminal block | CE/FCC        |

## Power Adapter

| Part Number     | Watts | Input          | Output    | Support SKU                            | Safety                            |
|-----------------|-------|----------------|-----------|--|-----------------------------------|
| 96PSA-A120W12V1 | 120W  | AC 100 ~ 240 V | 12 V, 10A | EPC-T3285CA-00Y1E<br>EPC-T32855A-00Y0E | CE/FCC/CCC/UL/CB/KC/PSE/GS/GOST R |
| 96PSA-A120W12P4 | 120W  | AC 100-240V    | 12V, 10A  | EPC-T32855A-15Y1E                      | CE/FCC/CCC/UL/CB/KC/PSE           |

## Packing List

| Part Number    | Description                                    | Quantity |
|----------------|--|----------|
| 1930001241     | Screws for Hard Disk/ spare                    | 6        |
| 1930003238     | M3x5 Screws For Rubber Foot/Wall Mount bracket | 4        |
| 1930004828     | Screws for Hard Disk bracket spare             | 2        |
| 1990012452S000 | Rubber Foot                                    | 4        |
| 1990021263S000 | Lock harness for power cord                    | 1        |
| 1990021264S000 |  | 1        |
| 2190000902     | CARDBOARD-WARRANTY REV. A2                     | 1        |

## Optional Accessories

| Part Number     | Description                                      |
|-----------------|--|
| AIMB-0BRK-RM03E | EPC-T3000 series Rack Mounting bracket kits      |
| AIMB-0BRK-WM02E | AIMB-T,EPC-T/B series Wall Mounting bracket kits |
| AIMB-0BRK-VM06E | EPC-T3000 series VESA Mounting bracket kits      |
| 1700023768-01   | 1x4P Phoenix to DC Jack 15cm cable               |
| 1700000596      | Power cable 3-pin 183cm, China type              |
| 1702031801      | Power cable 3-pin 183cm, UK type                 |
| 1702002600      | Power cable 3-pin 183cm, USA type                |
| 1702002605      | Power cable 3-pin 183cm, Europe type             |
| 1700000237-01   | Power cable 3-pin 183cm, JP type                 |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.