

HD/SD-SDI to HDMI adaptor board

HD-3000S

Manual

Table of Contents

Introduction	3
Connectors, Pin outs & Jumpers	5
Board Dimensions	9
Signal Support Mode Table	10
Specification	11
Warranty, Caution & Limitation of Liability, Trademarks	12
Contact details	13

1. Introduction

The HD-3000S is the depopulated version of HD-3000 by supporting signal channel input and output. The HD-3000S converts SD/HD-SDI (SD, HD and 3G) signal to HDMI for driving HDMI monitors. The HD-3000S provides re-clocked loop through outputs for “daisy chaining” multiple monitors or other equipments to the same HD-SDI source. It also supports embedded audio.

Fully compliant with the SMPTE 259M-C, SMPTE 292M, SMPTE 424M, 425M standards.


HD-3000S Key Features

a. Supports 1.5Gbits & 3Gbits bit rate input signal support.

The mode support is listed in page 11.

b. Single channels input port supported.

HD-3000S supports the signal path (HD-SDI input from J1 port convert to output HDMI at HDMI1/HDMI1A port). See Figure below :

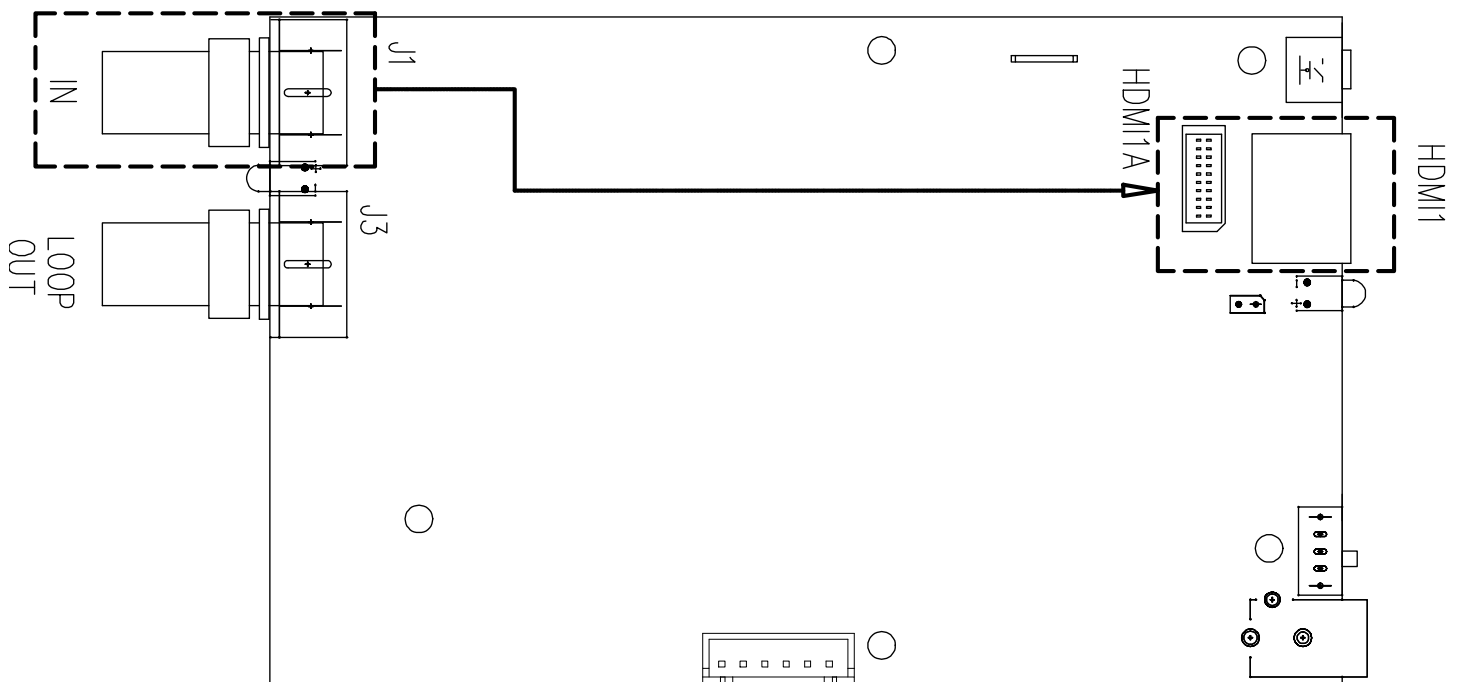

c. HD-SDI re-clock loop through output.

J1 HD-SDI input and re-clock loop through to J3 HD-SDI output.

d. HDMI (v1.3) x 1 output port.

One HDMI output ports are HDMI1/HDMI1A.

e. Stereo embedded audio support

f. On-board power on/off switch – The power on/off switch is installed on SW1.

g. AFD support – Active Format Description Support.


g. Status LEDs on board :

The definition of the LED1, LED3 are :

Ref	Description
LED1	Green LED on : Signal detected Green LED Blinking : No signal detected
LED3	Green LED on : Signal output Green LED off : No signal output

2. CONNECTORS, PINOUTS & JUMPERS

The various connectors are:

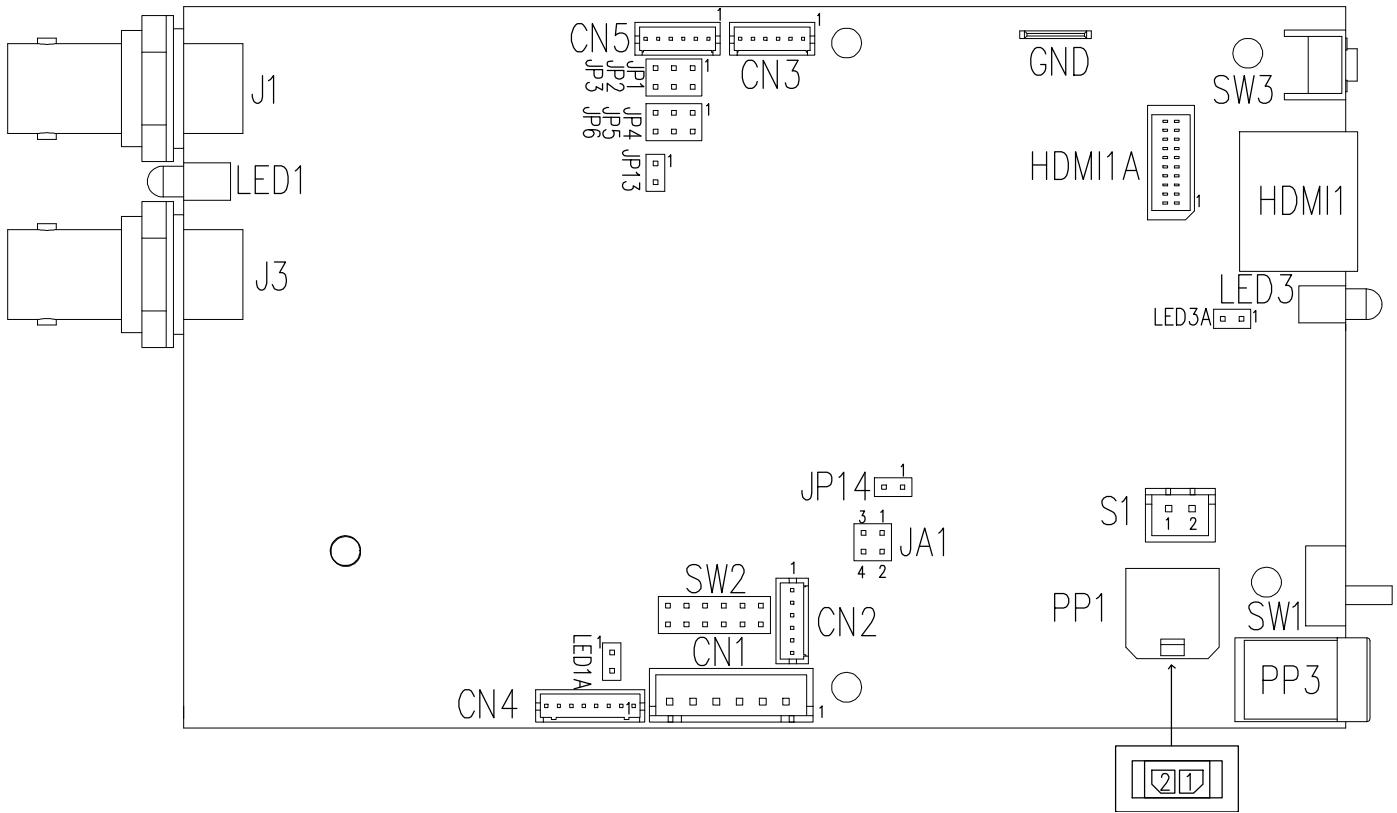

Summary: Connectors

Ref	Description	Type / Use
J1	SD/HD-SDI 1 Input	BNC connector
J3	SD/HD-SDI 1 re-clock loop through output	BNC connector
CN1	RS-232 & I ² C control connector	JST 6-way, B6B-XH-A (Matching type : XHP-6)
CN2	Reserved for programming use	Reserved
CN3	Reserved for programming use	Reserved
CN4	External I/O connector	Hirose DF13-6P-1.25DSA (Matching type : Hirose DF13-8S-1.25C)
CN5	Reserved for programming use	Reserved
HDMI1	HDMI Output	HDMI connector
HDMI1A	Alternate HDMI Output	JST BM20B-SRDS (Matching type : JST SHDR-20V-S-B)
PP1	Power Input (Alternate)	Molex 43650-0200 compatible (Matching connector type : Molex 43645-0200 compatible) (Matching power cable : P/N 426013800-3)
PP3	Power Input	DC power jack, 2.5mm contact pin diameter positive
S1	Alternate power on/off switch connector	JST B2B-XH-A (Matching type : XHP-2)

Ref	Description	Type / Use
SW1	Power on/off slide switch	Slide switch
SW3	No function	Reserved

Summary: Jumper settings :

Ref	Purpose	Note
JA1	On board +5V logic power enable	1-2 & 3-4 closed, factory set, do not remove
LED1A	External LED connection	Refer to pin assignment in page 7
LED3A	External LED connection	Refer to pin assignment in page 7
JP1-12	No function	No function
JP13	Reserved for programming use	Reserved
JP14	Reserved for programming use	Reserved
SW2	No function	No function

Summary : PinOuts :

CN1 – RS-232 & I²C control : JST B6B-XH-A (Matching type : XHP-6)

PIN	SYMBOL	DESCRIPTION
1	SDATA	I2C_SDATA
2	SCLK	I2C_SCLK
3	VCC	+5V
4	TXD	RS-232 Tx data
5	GND	Ground
6	RXD	RS-232 Rx data

CN4 – External I/O connector : Hirose DF13-6P-1.25DSA (Matching type : Hirose DF13-8S-1.25C)

PIN	SYMBOL	DESCRIPTION
1	3V3	3.3V output
2	LED3	LED3 Anode
3	LED4	LED4 Anode
4	EXT_IP_0	Reserved
5	EXT_IP_1	Reserved
6	LED1	LED1 Anode
7	LED2	LED2 Anode
8	GND	LED Cathode

LED1A, LED3A – External LED connection

PIN	SYMBOL	DESCRIPTION
1	+	LED Anode
2	-	LED Cathode

HDMI1A – Alternate HDMI connector: JST BM20B-SRDS (Matching type : JST SHDR-20V-S-B)

PIN	SYMBOL	DESCRIPTION
1	GND	Ground
2	GND	Ground
3	RXC+	TMDS Data C+
4	RXC-	TMDS Data C-
5	RX0+	TMDS Data 0+
6	RX0-	TMDS Data 0-
7	RX1+	TMDS Data 1+
8	RX1-	TMDS Data 1-
9	RX2+	TMDS Data 2+
10	RX2-	TMDS Data 2-
11	GND	Ground
12	GND	Ground
13	MSTR2_SCL	Reserved

PIN	SYMBOL	DESCRIPTION
14	MSTR2_SDA	Reserved
15	DDC_5V	+5V power supply for DDC (optional)
16	HPD	Hot plug detection
17	DDC_SCL	DDC serial clock
18	DDC_SDA	DDC Data
19	VCC1	VCC 5V output
20	VCC2	VCC 5V output

S1 – Alternate power on/off switch connector

(Matching type : XHP-2)

PIN	SYMBOL	DESCRIPTION
1	12V_IN	+12V INPUT
2	12V_OUT	+12V OUTPUT


PP1 – Alternate 12VDC power supply

PIN	DESCRIPTION
1	+12VDC in
2	Ground

PP3 - 12VDC power supply

PIN	DESCRIPTION
1	+12VDC in
2	Ground

3. BOARD DIMENSIONS

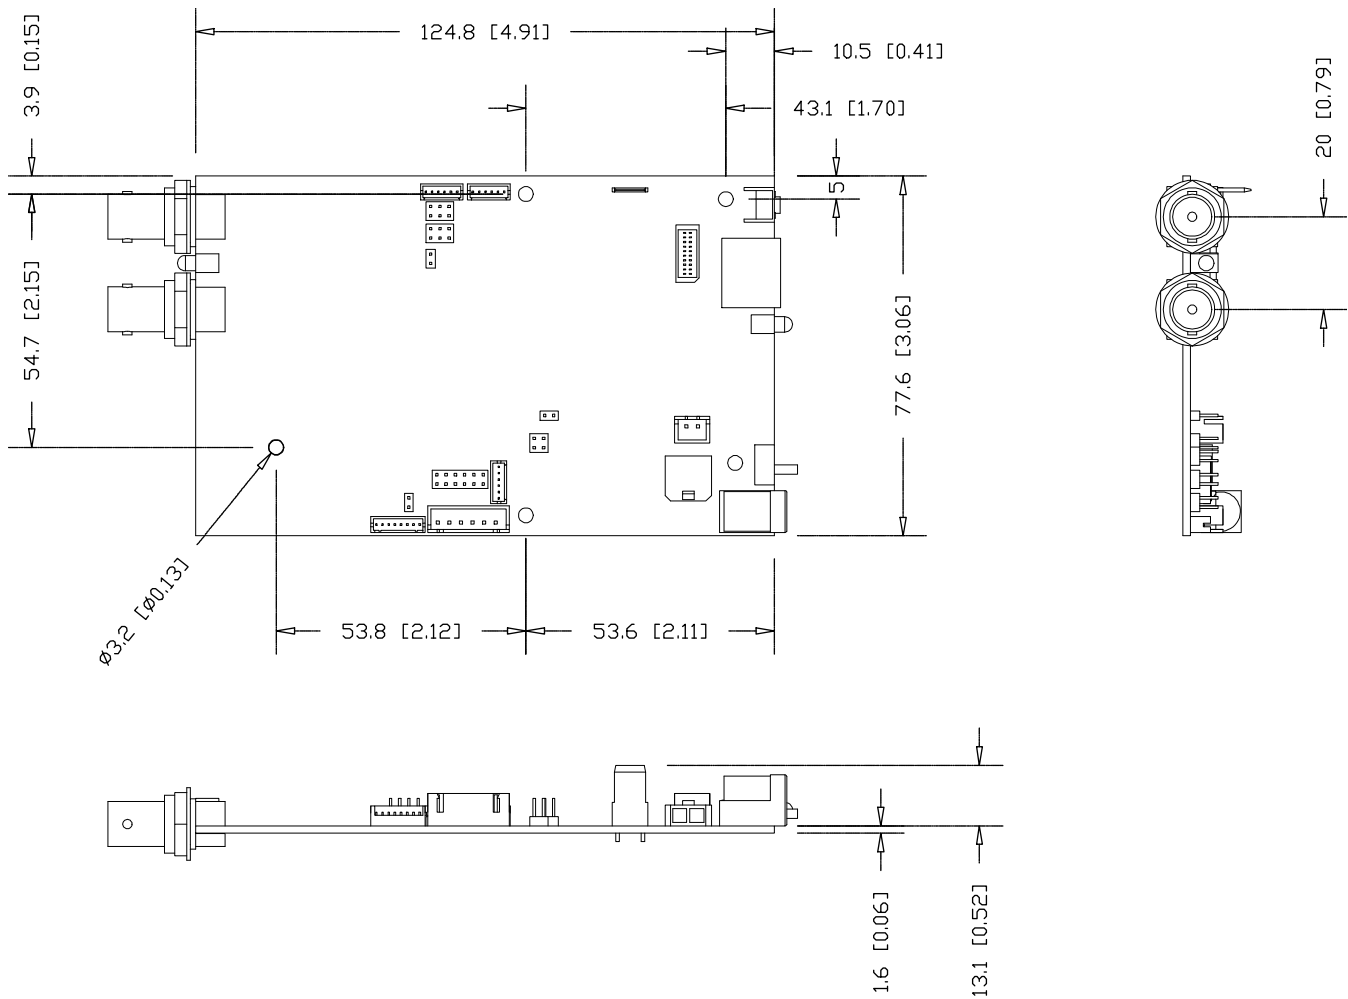

Ready-made 3D Pro-E (SLDPRT) drawing files - Save time and effort for your system volumetric analysis design. Includes jpg file previews. Please go to download at <http://www.digitalview.com/accessories/hd-3000S>

The maximum thickness of the adaptor board is 18mm (measured from bottom of PCB to top of components, excluding the BNC connectors). We recommend clearances of:

- 5mm from bottom of PCB - if mounting on a metal plate we also recommend a layer of suitable insulation material is added to the mounting plate surface.
- 10mm above the components
- 3~5mm around the edges

Any of the holes shown above can be used for mounting the PCB, they are 3.2mm in diameter.

CAUTION: Ensure adequate insulation is provided for all areas of the PCB with special attention to high voltage parts such as the inverter.

4. SIGNAL SUPPORT MODE TABLE

Mode
576i50 (PAL)
480i60 (NTSC)
720p60 (4:2:2)
720p59.94 (4:2:2)
720p50 (4:2:2)
720p30 (4:2:2)
720p29.97 (4:2:2)
720p25 (4:2:2)
1035i60 (4:2:2)
1035i59.94 (4:2:2)
1080p30 (4:2:2)
1080p29.97 (4:2:2)
1080p25 (4:2:2)
1080p24 (4:2:2)
1080p23.98 (4:2:2)
1080psf30 (4:2:2)
1080psf25 (4:2:2)
1080psf24 (4:2:2)
1080psf23.98 (4:2:2)
1080i60 (4:2:2)
1080i59.94 (4:2:2)
1080i50 (4:2:2)
1080p60 (4:2:2)
1080p50 (4:2:2)

5. Specification

Supported serial interface standard	SMPTE 292M, 259M-C, 424M, 425M (Level A)
Supported video mode	576i50 (PAL) 480i60 (NTSC) 720p60 (4:2:2) 720p59.94 (4:2:2) 720p50 (4:2:2) 720p30 (4:2:2) 720p29.97 (4:2:2) 720p25 (4:2:2) 1035i60 (4:2:2) 1035i59.94 (4:2:2) 1080p30 (4:2:2) 1080p29.97 (4:2:2) 1080p25 (4:2:2) 1080p24 (4:2:2) 1080p23.98 (4:2:2) 1080psf30 (4:2:2) 1080psf25 (4:2:2) 1080psf24 (4:2:2) 1080psf23.98 (4:2:2) 1080i60 (4:2:2) 1080i59.94 (4:2:2) 1080i50 (4:2:2) 1080p60 (4:2:2) 1080p50 (4:2:2)
Number of channel input port supported	1
HD-SDI re-clock loop through output	Yes
Output port	HDMI (v1.3) x 1
AFD (Active Format Description) support	Yes
Embedded audio	Supported with Stereo
LEDs	Status LED (Green)
On board power on/off switch	Yes
Power requirement	Regulated DC 12V input (2.5mm center positive)
Power consumption	+12VDC $\pm$ 5%, 2.5W
Environmental	Operating temperature : 0°C to 60°C Relative humidity : 5%-95% relative humidity (Non-condensing)
RoHS Compliant	Yes
Dimensions	124.8(W) x 77.6 (D) x 18(H) mm

6. WARRANTY

The products are warranted against defects in workmanship and material for a period of three (3) year from the date of purchase provided no modifications are made to it and it is operated under normal conditions and in compliance with the instruction manual.

The warranty does not apply to:

- Product that has been installed incorrectly, this specifically includes but is not limited to cases where electrical short circuit is caused.
- Product that has been altered or repaired except by the manufacturer (or with the manufacturer's consent).
- Product that has subjected to misuse, accidents, abuse, negligence or unusual stress whether physical or electrical.
- Ordinary wear and tear.

Except for the above express warranties, the manufacturer disclaims all warranties on products furnished hereunder, including all implied warranties of merchantability and fitness for a particular application or purpose. The stated express warranties are in lieu of all obligations or liabilities on the part of the manufacturer for damages, including but not limited to special, indirect consequential damages arising out of or in connection with the use of or performance of the products.

CAUTION

Whilst care has been taken to provide as much detail as possible for use of this product it cannot be relied upon as an exhaustive source of information. This product is for use by suitably qualified persons who understand the nature of the work they are doing and are able to take suitable precautions and design and produce a product that is safe and meets regulatory requirements.

LIMITATION OF LIABILITY

The manufacturer's liability for damages to customer or others resulting from the use of any product supplied hereunder shall in no event exceed the purchase price of said product.

TRADEMARKS

The following are trademarks of Digital View Ltd:

- Digital View
- HD-3000S

7. CONTACT DETAILS

Digital View has offices in Asia, Europe and USA :

USA

Digital View Inc.
18440 Technology Drive
Building 130
Morgan Hill,
California, 95037
USA

Tel: (1) 408-782 7773

Fax: (1) 408-782 7883

Sales: ussales@digitalview.com

EUROPE

Digital View Ltd.
6 Marylebone Passage,
London, W1W 8EX,
UK.

Tel: +44-(0)20-7631-2150

Fax: Fax: +44-(0)20-7631-2156

Sales: uksales@digitalview.com

ASIA

Digital View Ltd
16 th Floor Millennium City 3
370 Kwun Tong Road
Kwun Tong
Hong Kong

Tel: (852) 2861 3615

Fax: (852) 2520 2987

Sales: hksales@digitalview.com

WEBSITE

www.digitalview.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.