


ABC300 Series

AC-DC Open Frame Power Supplies

The ABC300 Series of open-frame power supplies, with its wide universal 90-264 VAC input range and high power density, is available at 300 W of output power and a variety of single output voltages.

The high efficiency and high power density of the ABC family ensures minimal power loss in end-use equipment, thereby facilitating higher reliability, easier thermal management and meets regulatory approvals for environmentally-friendly end products.

These power supplies are ideal for telecom, datacom, industrial equipment and other applications.

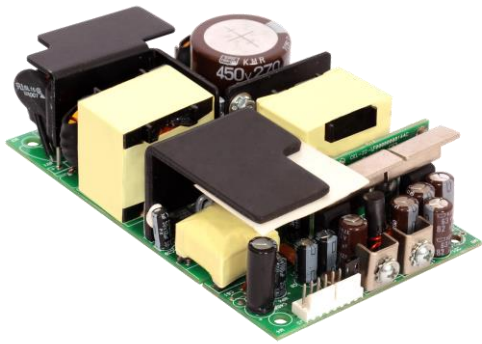

Key Features & Benefits

- 5 x 3 x 1.5 inch form factor
- 200 W convection cooled
- -20 to 50°C full load operation
- No minimum load required
- 12 V fan & 5 V standby outputs
- Inhibit & Power Good signals
- IEC Protection Class Options:
 - Class I: Earth pin J4 (no suffix)
 - Class II: No Earth pin (-2 suffix)
- Conducted EMI EN 55022-B, FCC Part 15 Level B
- ITE Safety Agency Approvals
- RoHS Compliant
- CE marked

Applications

- Instrumentation
- Lighting
- Industrial Applications
- Applied Computing
- Renewable Energy
- Test and Measurement
- Robotics
- Wireless Communication



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

| MODEL | CONNECTOR | OUTPUT VOLTAGE | MAX LOAD CONVECTION ^{1,2,3} | MAX LOAD 300 LFM ^{1,2,3} | MINIMUM LOAD | RIPPLE & NOISE ⁴ | TOTAL REGULATION |
|----------------------------|---------------------------|----------------|--------------------------------------|-----------------------------------|--------------|-----------------------------|------------------|
| ABC300-1T05G | Screw Terminal | 5 VDC | 28.0 A | 40.0 A | 0.0 A | 2% | ± 2.5% |
| ABC300-1T12G | Screw Terminal | 12 VDC | 16.67 A | 25.0 A | 0.0 A | 2% | ± 2.5% |
| ABC300-1T15G | Screw Terminal | 15 VDC | 13.33 A | 20.0 A | 0.0 A | 2% | ± 2.5% |
| ABC300-1T24G | Screw Terminal | 24 VDC | 7.5 A | 13.54 A | 0.0 A | 2% | ± 2.5% |
| ABC300-1T30G | Screw Terminal | 30 VDC | 6.0 A | 10.83 A | 0.0 A | 2% | ± 2.5% |
| ABC300-1T48G | Screw Terminal | 48 VDC | 3.75 A | 6.77 A | 0.0 A | 2% | ± 2.5% |
| Cover-300-XCB ⁵ | Metal cover kit accessory | | | | | | |

2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|---------------------|--|---|
| Input Voltage | Universal | 90-264 VAC / 120-390 VDC |
| Input Frequency | | 47 to 63 Hz |
| Input Current | 120 VAC 230 VAC | 3.2 A max 1.65 A max |
| No Load Power | | 0.8 W |
| Inrush Current | 120 VAC 230 VAC | 35 A max 65 A max |
| Leakage Current | 120 VAC 230 VAC | < 150 µA < 300 µA |
| Switching Frequency | PFC converter (fixed) Resonant converter (variable) | 80 kHz typical 35 to 250 kHz, 90 kHz typical |

¹ Peak current rating on main output is 120% of max., lasting < 30 s with a maximum 10% duty cycle.

² Combined output power of main output, fan supply and standby supply shall not exceed max. power rating.

³ Derate output power linearly to 80% from 90 VAC to 80 VAC input.

⁴ Ripple is peak to peak with 20 MHz bandwidth and 10 µF (Tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

⁵ When used in Cover Kit, de-rate output power to 70 % under all operating conditions.

3. OUTPUT SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|----------------------------------|---|-----------------------------|
| Output Power ^{6,7} | Derate linearly to 80% from 90 VAC to 80 VAC input. | 200 to 325 W |
| Efficiency | 120 VAC 230 VAC | 88% typical 92% typical |
| Hold Up Time | 120 / 230 VAC | 10 ms |
| Power Factor | 120 VAC 230 VAC | 0.98 0.95 |
| Line Regulation | | +/-0.5% |
| Load Regulation | | +/-2% |
| Transient Response | 50% to 100% load change, 50 Hz, 50% duty cycle, 0.1 A/ μ s, | < 10%, recovery time < 5 ms |
| Rise Time | | < 100 ms |
| Set Point Tolerance ⁸ | | \pm 1% |
| Voltage Output Adjustment | | \pm 3 % |
| Over Voltage Protection | Automatic recovery | 110 to 150 % |
| Over Current Protection | | 110 to 150 % |
| Short Circuit Protection | Short term, automatic recovery | |
| Over Temperature Protection | Automatic Recovery | 110° C primary heat sink |

4. SIGNALS

| PARAMETER | DESCRIPTION / CONDITION |
|-------------------------|---|
| Power Good ⁹ | TTL signal goes high after main output is within regulation band, delay is 0.1 to 0.3 s |
| Remote On/ Off | To turn on PSU short remote pin to ground |
| Remote Sense | Compensates for 200 mV cable drop |

5. EMC SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|------------------------------------|--|----------------------|
| Conducted Emissions | EN55032-B, CISPR22-B, FCC PART15-B | Pass |
| Radiated Emissions | EN 55032 A; with external core (King core K5B RC 25x12x15-M in input cable) | Pass Level B |
| Input Current Harmonics | EN 61000-3-2 | Class D |
| Voltage Fluctuation and Flicker | EN 61000-3-3 | Pass |
| ESD Immunity | EN 61000-4-2 | Level 3, Criterion A |
| Radiated Field Immunity | EN 61000-4-3 | Level 3, Criterion A |
| Electrical Fast Transient Immunity | EN 61000-4-4 | Level 3, Criterion A |
| Surge Immunity | EN 61000-4-5 | Level 3, Criterion A |
| Conducted Immunity | EN 61000-4-6 | Level 3, Criterion A |
| Magnetic Field Immunity | EN 61000-4-8 | Level 3, Criterion A |
| Voltage Dips, Interruptions | EN 61000-4-11 | Criterion A & B |

⁶ Fan supply output voltage tolerance including set point accuracy, line and load regulation is +/-30% and needs min. 1% load on main output to be within regulation band. Ripple and noise is less than 10%.

⁷ The de-rating curves are valid for input voltages of 115VAC to 264 VAC. Below 115 VAC to 90 VAC the convection rating is 180 W max.

⁸ Standby output voltage tolerance including set point accuracy, line and load regulation is +/-10%. Ripple and noise is less than 5%.

⁹ Power good signal cannot be used as a current source. Internal pull up resistor from PG signal to 5 V is 10K.
It is recommended to use external transistor if intended to source current.

6. ENVIRONMENTAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|-----------------------|---|--|
| Operating Temperature | Refer to de-rating curves (Fig. 1) to determine output power over the entire operating temperature range. Start-up is guaranteed | -20 to 70°C -20 to 0°C |
| Storage Temperature | | -40 to 85° C |
| Cooling | Convection: | 5 V model 140 W max 12 V, 15 V, 24 V, 30 V & 48 V models 200 W max 5 V model 200 W max |
| | With 300LFM: | 12 V and 15 V models 300 W max 24 V, 30V and 48 V models 325 W max |
| Relative Humidity | Non Condensing | 95% Rh |
| Altitude | Operating: | 10,000 ft. |
| | Non-Operating: | 40,000 ft. |
| Reliability | MTBF according to Telcordia –SR332-issue 3 | 1.77 million hours |

7. SAFETY SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|-------------------|---|---------------|
| Isolation Voltage | Input to Output: | 4242 VDC min |
| Safety Standards | Approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1 | |
| Agency Approvals | Nemko, Nemko-CCL | |
| CE mark | Complies with LVD Directive | |

8. CONNECTOR & PIN DESCRIPTION

| CONNECTOR | PIN | DESCRIPTION / CONDITION | MANUFACTURER / PN |
|-----------------------------------|-----|---|--|
| AC Input Connector | J1 | Pin 1 AC LINE | Molex: 26-60-4030 Mating: 09-50-3031; Pins: 08-50-0106 6-32 inches Screw Pan HD Mating: Designed to accept Ring Tongue Terminal AMP : 8-31886-1, wherein one 16 AWG (max) wire can be crimped. Note: One Ring Tongue Terminal with 16 AWG is recommended for current up to 11 A only. Use multiple tongue terminals with wire for more current. |
| | | Pin 2 AC NEUTRAL | |
| DC Output Connector | J2 | Pin 1 RTN | Mating: 22-23-2081 Mating: 22-01-2087; Pins: 08-50-0113 |
| | | Pin 2 V1 | |
| Signals & Aux Power ¹⁰ | J3 | Pin 1 REMOTE ON/OFF | Mating: 22-01-2087; Pins: 08-50-0113 |
| | | Pin 2 RTN | |
| | | Pin 3 VFAN (+12 V/0.5 A) | |
| | | Pin 4 -VE REMOTE SENSE | |
| | | Pin 5 VSTBY (+5 V/2 A, +/-5%) | |
| | | Pin 6 +VE REMOTE SENSE | |
| Earth | J4 | Pin 7 RTN | Mating: 19705-4301 Mating: 190030001 |
| | | Pin 8 POWER GOOD Spade Connector (Class I product only) | |

9. MECHANICAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION |
|------------|---|
| Weight | 450 g (0.99 lbs) |
| Dimensions | 127.0 x 76.2 x 38.1 mm (5.0 x 3.0 x 1.5 inch) |

¹⁰ PSU is supplied with J3 housing, pin-1 and pin-2 shorted to enable main output without remote on/off feature.




Convection load: 140 W up to 40 °C
De-rate above 40 °C @ 1.67% per °C

Forced air cooled load: 200 W up to 40°C
De-rate above 40 °C @ 1.67% per °C



Convection load: 200 W up to 40 °C
De-rate between 40-50 °C @ 1% per °C
De-rate above 50 °C @ 2.5% per °C

Forced air cooled load: 300 W up to 50°C
De-rate above 50 °C @ 2.5% per °C

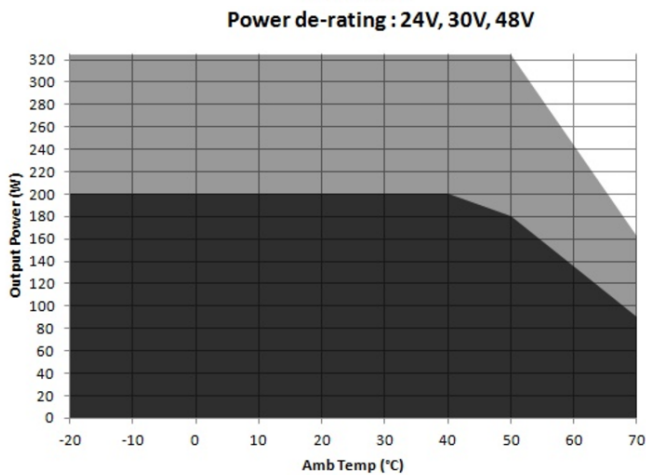

Convection load: 200 W up to 40 °C
De-rate between 40-50 °C @ 1% per °C
De-rate above 50 °C @ 2.5% per °C

Forced air cooled load: 325 W up to 50°C
De-rate above 50 °C @ 2.5% per °C

Figure 1. Derating Curves



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

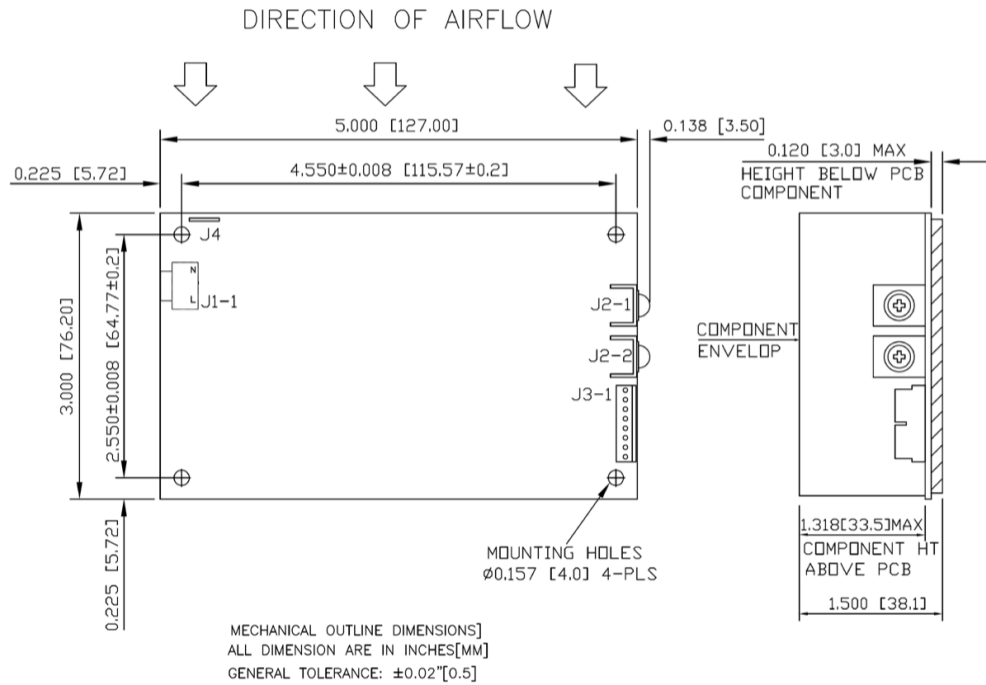


Figure 2. Mechanical Drawing

NOTES: In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following:

- 1 Stand off, used to mount PCB has OD of 5.4 mm max.
- 2 Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
- 3 Washer, if used, to have dia of 6.5 mm max.

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.