

ML SERIES

105°C 5mm~9mm Height, Long Life

*Load Life : 105°C 3000~5000 hours.

RoHS
compliance



◆SPECIFICATIONS

Items	Characteristics																																	
Category Temperature Range	-40~+105℃																																	
Rated Voltage Range	6.3~50Vdc																																	
Capacitance Tolerance	±20% (20℃,120Hz)																																	
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater.(After 2 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)																																	
Dissipation Factor(MAX) (tanδ)	<table><tr><td>Rated Voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>tanδ</td><td>0.40</td><td>0.35</td><td>0.30</td><td>0.25</td><td>0.20</td><td>0.20</td></tr></table> (20℃,120Hz)							Rated Voltage (V)	6.3	10	16	25	35	50	tanδ	0.40	0.35	0.30	0.25	0.20	0.20													
Rated Voltage (V)	6.3	10	16	25	35	50																												
tanδ	0.40	0.35	0.30	0.25	0.20	0.20																												
Endurance	After applying rated voltage with rated ripple current for specified time at 105℃, the capacitors shall meet the following requirements. <table><tr><td>Capacitance Change</td><td colspan="5">Within ±30% of the initial value.</td><td><table><tr><td>Case Size</td><td>Life Time (hrs)</td></tr><tr><td>L=5mm</td><td>3000</td></tr><tr><td>L≥7mm</td><td>5000</td></tr></table></td></tr><tr><td>Dissipation Factor</td><td colspan="5">Not more than 300% of the specified value.</td><td></td></tr><tr><td>Leakage Current</td><td colspan="5">Not more than the specified value.</td><td></td></tr></table>							Capacitance Change	Within ±30% of the initial value.					<table><tr><td>Case Size</td><td>Life Time (hrs)</td></tr><tr><td>L=5mm</td><td>3000</td></tr><tr><td>L≥7mm</td><td>5000</td></tr></table>	Case Size	Life Time (hrs)	L=5mm	3000	L≥7mm	5000	Dissipation Factor	Not more than 300% of the specified value.						Leakage Current	Not more than the specified value.					
Capacitance Change	Within ±30% of the initial value.					<table><tr><td>Case Size</td><td>Life Time (hrs)</td></tr><tr><td>L=5mm</td><td>3000</td></tr><tr><td>L≥7mm</td><td>5000</td></tr></table>	Case Size	Life Time (hrs)	L=5mm	3000	L≥7mm	5000																						
Case Size	Life Time (hrs)																																	
L=5mm	3000																																	
L≥7mm	5000																																	
Dissipation Factor	Not more than 300% of the specified value.																																	
Leakage Current	Not more than the specified value.																																	
Low Temperature Stability Impedance Ratio(MAX)	<table><tr><td>Rated Voltage (Vdc)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>Z(-25℃)/Z(20℃)</td><td>6</td><td>4</td><td>4</td><td>3</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃)/Z(20℃)</td><td>12</td><td>10</td><td>8</td><td>6</td><td>4</td><td>4</td></tr></table> (120Hz)							Rated Voltage (Vdc)	6.3	10	16	25	35	50	Z(-25℃)/Z(20℃)	6	4	4	3	2	2	Z(-40℃)/Z(20℃)	12	10	8	6	4	4						
Rated Voltage (Vdc)	6.3	10	16	25	35	50																												
Z(-25℃)/Z(20℃)	6	4	4	3	2	2																												
Z(-40℃)/Z(20℃)	12	10	8	6	4	4																												

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	60(50)	120	500	1k	10k≤
Coefficient					
1μF	0.50	1.00	1.20	1.30	1.50
2.2~6.8μF	0.65	1.00	1.20	1.30	1.50
10~82μF	0.80	1.00	1.20	1.30	1.50
100~1000μF	0.80	1.00	1.10	1.15	1.20

◆OPTION


	Code
PET Sleeve	EFC

◆PART NUMBER

□□□	ML	□□□□□	M	□□□	□□	D×L
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆ DIMENSIONS

(mm)

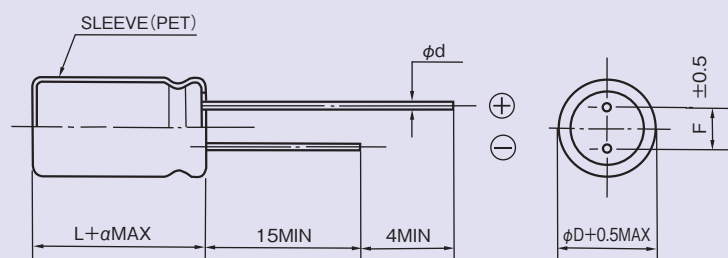

ϕD	4	5	6.3	8×5	8×7	8×7.5	8×9	10
ϕd	0.45						0.6	
F	1.5	2.0	2.5		3.5			5.0
α	L=7 : α =1.0 L=5 : α =1.5		1.5		1.0		2.0	

◆ **STANDARD SIZE**

Size $\phi D \times L$ (mm), Rated Ripple Current (mA r.m.s./105°C, 120Hz)[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rubycon:

[10ML100MEFC6.3X5](#) [10ML120MEFC6.3X7](#) [10ML180MEFC8X5](#) [10ML220MEFC8X7](#) [10ML22MEFC4X5](#)
[10ML330MEFC8X7.5](#) [6.3ML82MEFC5X7](#) [6.3ML270MEFC8X7](#) [6.3ML27MEFC4X5](#) [6.3ML470MEFC8X7.5](#)
[6.3ML47MEFC4X7](#) [6.3ML560MEFC8X9](#) [6.3ML56MEFC5X5](#) [50ML56MEFC8X7.5](#) [50ML82MEFC8X9](#)
[6.3ML1000MEFC10X9](#) [6.3ML120MEFC6.3X5](#) [6.3ML180MEFC6.3X7](#) [6.3ML220MEFC8X5](#) [50ML22MEFC6.3X7](#)
[50ML22MEFC8X5](#) [50ML2R2MEFC4X5](#) [50ML33MEFC8X7](#) [50ML3R3MEFC4X5](#) [50ML4R7MEFC4X7](#)
[35ML6R8MEFC4X5](#) [50ML10MEFC5X7](#) [50ML120MEFC10X9](#) [50ML12MEFC6.3X5](#) [50ML18MEFC6.3X7](#)
[50ML1MEFC4X5](#) [35ML18MEFC5X7](#) [35ML220MEFC10X9](#) [35ML27MEFC6.3X5](#) [35ML39MEFC6.3X7](#)
[35ML47MEFC8X5](#) [35ML56MEFC8X7](#) [25ML56MEFC6.3X7](#) [25ML82MEFC8X5](#) [35ML100MEFC8X7.5](#)
[35ML10MEFC4X7](#) [35ML12MEFC5X5](#) [35ML150MEFC8X9](#) [25ML15MEFC4X7](#) [25ML220MEFC8X9](#) [25ML22MEFC5X5](#)
[25ML27MEFC5X7](#) [25ML330MEFC10X9](#) [25ML47MEFC6.3X5](#) [16ML39MEFC5X7](#) [16ML470MEFC10X9](#)
[16ML68MEFC6.3X5](#) [25ML100MEFC8X7](#) [25ML10MEFC4X5](#) [25ML150MEFC8X7.5](#) [16ML150MEFC8X7](#)
[16ML18MEFC4X5](#) [16ML220MEFC8X7.5](#) [16ML22MEFC4X7](#) [16ML330MEFC8X9](#) [16ML33MEFC5X5](#)
[10ML33MEFC4X7](#) [10ML470MEFC8X9](#) [10ML47MEFC5X5](#) [10ML56MEFC5X7](#) [16ML100MEFC6.3X7](#)
[16ML120MEFC8X5](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.