



# MIC2591B

## Dual-Slot PCI Express Hot-Plug Controller

### General Description

The MIC2591B is a dual-slot power controller supporting the power distribution requirements for Peripheral Component Interconnect Express (PCI Express) Hot-Plug compliant systems incorporating the Intelligent Platform Management Interface (IPMI) Specification v1.0. The MIC2591B provides complete power control support for two PCI Express slots, including the 3.3VAUX defined by the PCI Express standards. Support for 12V, 3.3V, and 3.3VAUX supplies is provided including programmable constant-current inrush limiting, voltage supervision, programmable current limit, and circuit breaker functions. These features provide comprehensive system protection and fault isolation. The MIC2591B also incorporates an SMBus interface via which complete status of each slot is provided. Data such as voltage and current from each supply of each slot can be obtained for IPMI sensor records in addition to the power status of each slot.

All support documentation can be found on Micrel's web site at [www.micrel.com](http://www.micrel.com).

### Features

- Supports two independent PCI Express slots
- SMBus interface for slot power control and status
- Voltage-tolerant I/O for compatibility with SMBus 2.0 systems
- 12V, 3.3V, and 3.3VAUX supplies supported per PCI Express Specification v1.0a
  - Integrated power MOSFETs for 3.3VAUX rails
  - Standby operation for Wake-on-LAN applications with low backfeed on Main +12V and +3.3V rails.
- On-chip circuitry for data collection of each rail output voltage and output current for both slots
  - Integral analog multiplexer and 8-bit  $\Delta\Sigma$  ADC
  - Compliant to the Intelligent Platform Management Interface (IPMI) Specification v1.0
  - Conversion results available via an SMBus interface
- Programmable inrush current limiting
- Active current regulation controls inrush current
- Electronic circuit breaker for each supply to each slot
- High accuracies for both circuit breaker trip points and nuisance trip prevention timers
- Dual level fault detection for quick fault response without nuisance tripping
- Thermal isolation between circuitry for Slot A and Slot B
- Two General Purpose Input pins suitable for interface to logic and switches.

### Applications


- PCI Express v1.0a hot-plug power control

### Ordering Information

| Part Number      |                  | 12V and 3V<br>Fast-Trip Thresholds | 3.3VAUX<br>Current Limit | Package     |
|------------------|------------------|------------------------------------|--------------------------|-------------|
| Standard         | Pb-Free          |                                    |                          |             |
| MIC2591B – 2BTQ  | MIC2591B – 2YTQ  | 100mV                              | 0.375A                   | 48 Pin TQFP |
| MIC2591B – 3BTQ* | MIC2591B – 3YTQ* | 150mV                              | 0.375A                   | 48 Pin TQFP |
| MIC2591B – 5BTQ* | MIC2591B – 5YTQ* | Disabled                           | 0.375A                   | 48 Pin TQFP |

\* Contact factory for availability

Typical Application

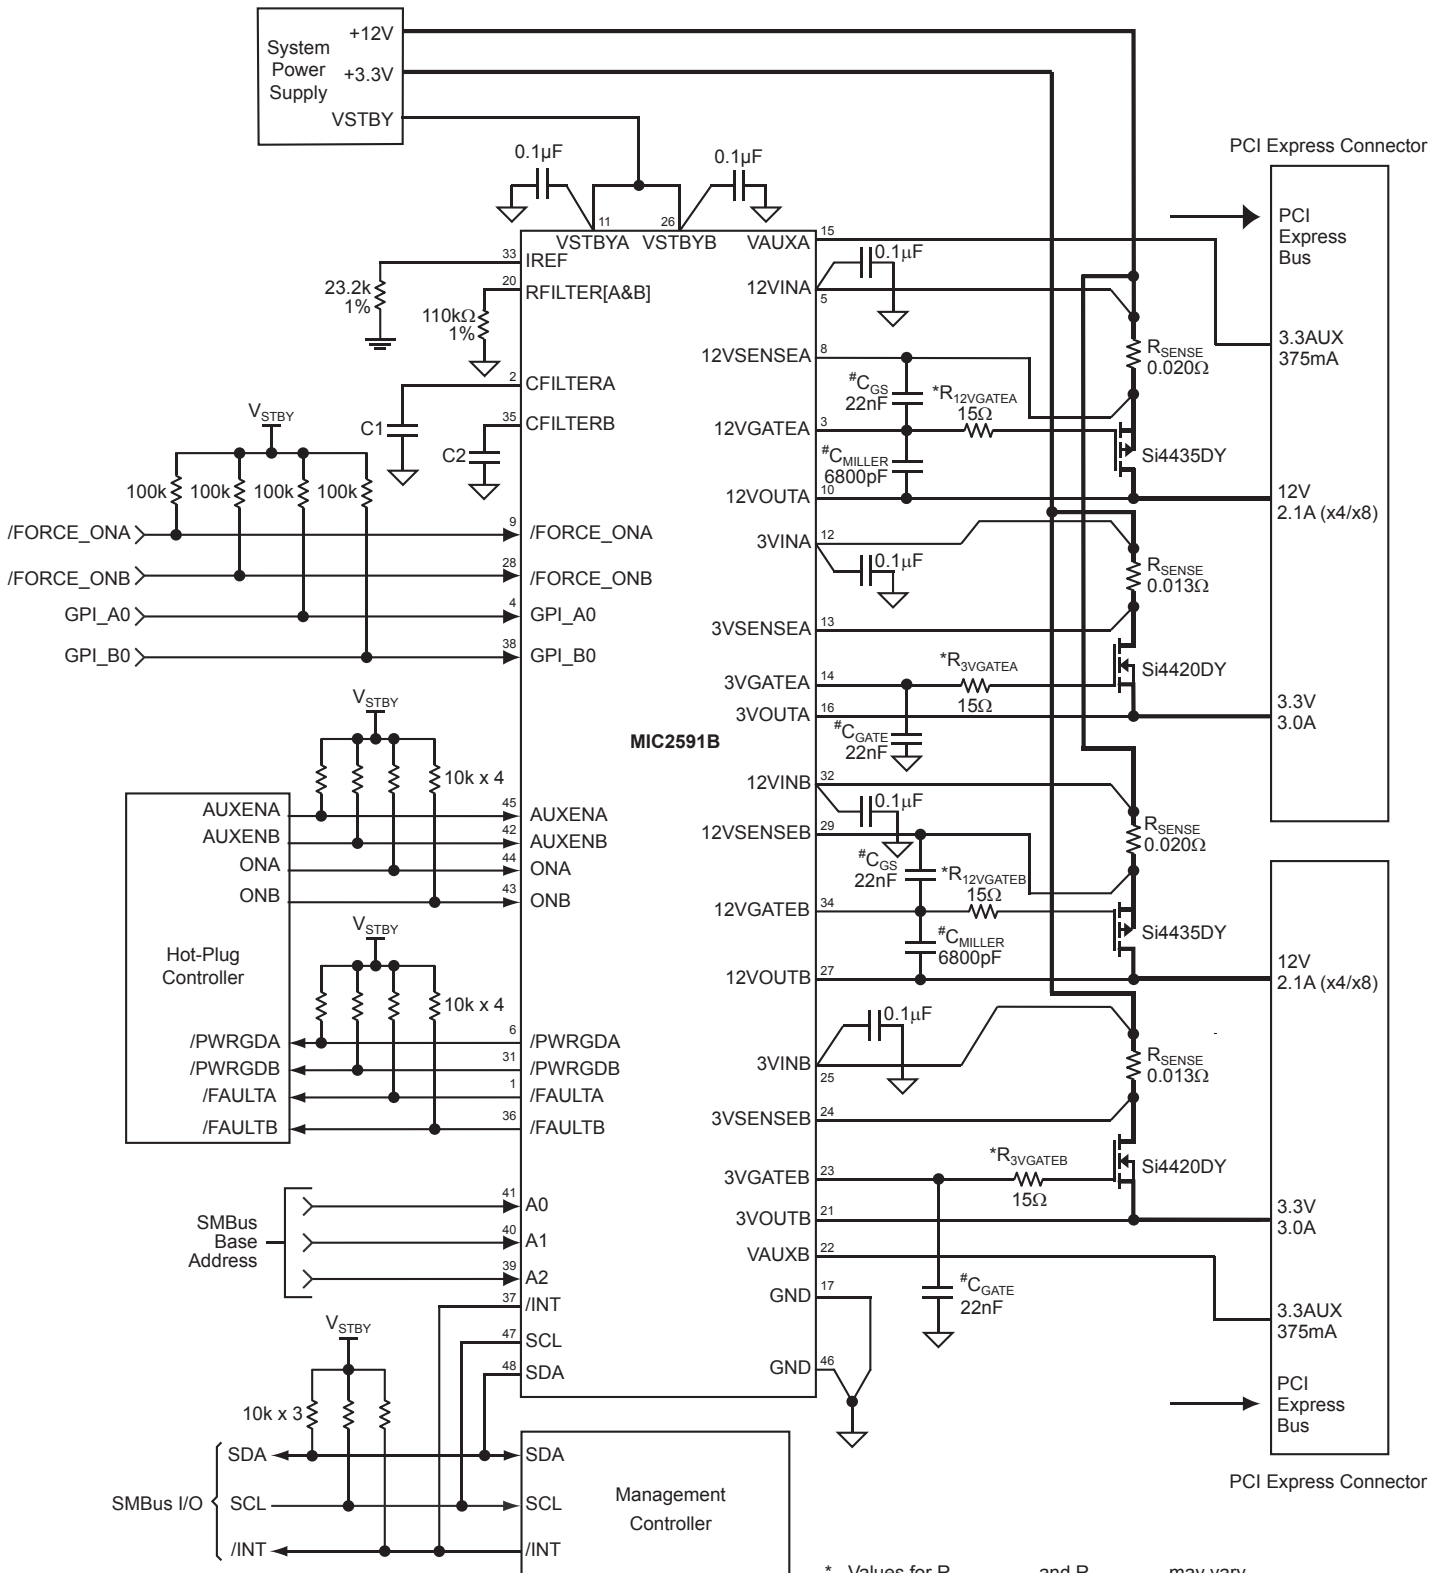


\* Values for R<sub>12VGATE[A/B]</sub> and R<sub>3VGATE[A/B]</sub> may vary depending upon the C<sub>GS</sub> of the external MOSFETs.

# These components are not required for MIC2591B operation but can be implemented for GATE output slew rate control (application specific)

¥ Bold lines indicate high current paths

# Pin Configuration

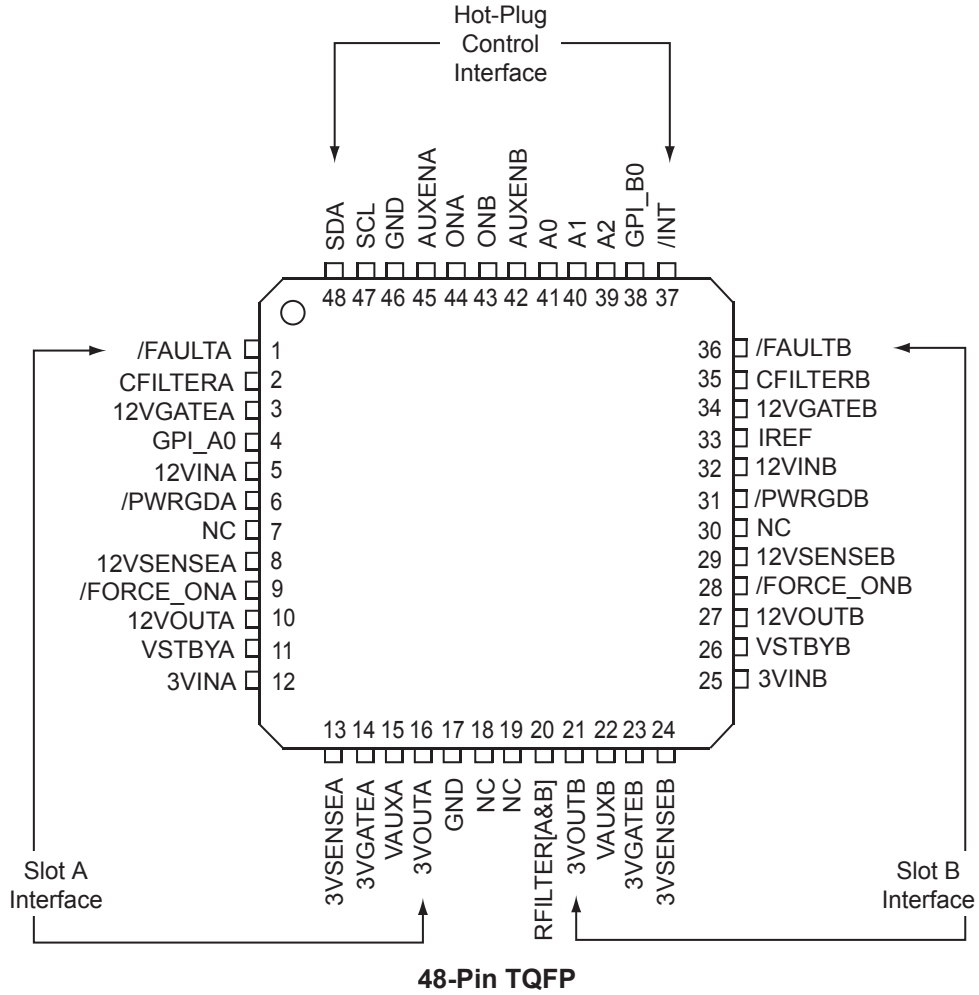

## Pin Description

| Pin Number | Pin Name               | Pin Function   |
|------------|------------------------|--|
| 5<br>32    | 12VINA<br>12VINB       | 12V Supply Power and Sense Inputs: Two pins are provided for Kelvin connection (one for each slot). Pin 5 is the (+) Kelvin-sense connection to the supply side of the sense resistor for 12V Slot A. Pin 32 is the (+) Kelvin-sense connection to the supply side of the sense resistor for 12V Slot B. These two pins must ultimately connect to each other as close as possible at the MIC2591B controller in order to eliminate any IR drop between these pins. An undervoltage lockout circuit (UVLO) prevents the switches from turning on while this input is less than its lockout threshold.  |
| 12<br>25   | 3VINA<br>3VINB         | 3.3V Supply Power and Sense Inputs: Two pins are provided for connection (one for each slot). Pin 12 is the (+) Kelvin-sense connection to the supply side of the sense resistor for 3V Slot A. Pin 25 is the (+) Kelvin-sense connection to the supply side of the sense resistor for 3V Slot B. These two pins must ultimately connect to each other as close as possible at the MIC2591B controller in order to eliminate any IR drop between these pins. An undervoltage lockout circuit (UVLO) prevents the switches from turning on while this input is less than its lockout threshold.   |
| 16<br>21   | 3VOUTA<br>3VOUTB       | 3.3V Power-Good Sense Inputs: Connect to 3.3V[A/B] outputs (i.e., the source terminal of the external power MOSFET). Used to monitor the 3.3V output voltages for Power-is-Good status.  |
| 10<br>27   | 12VOUTA<br>12VOUTB     | 12V Power-Good Sense Inputs: Connect to 12V[A/B] outputs (i.e., the drain terminal of the external power MOSFET). Used to monitor the 12V output voltages for Power-is-Good status.  |
| 8<br>29    | 12VSENSEA<br>12VSENSEB | 12V Circuit Breaker Sense Inputs: The current limit thresholds are set by connecting sense resistors between these pins and 12VIN[A/B]. When the current limit threshold of $IR = 50\text{mV}$ is reached, the 12VGATE[A/B] pin is modulated to maintain a constant voltage across the sense resistor and therefore a constant current into the load. If the 50mV threshold is exceeded for $t_{FLT}$ , the circuit breaker is tripped and the GATE pin for the affected 12V supply's external MOSFET is immediately pulled high.  |
| 13<br>24   | 3VSENSEA<br>3VSENSEB   | 3V Circuit Breaker Sense Inputs: The current limit thresholds are set by connecting sense resistors between these pins and 3VIN[A/B]. When the current limit threshold of $IR = 50\text{mV}$ is reached, the 3VGATE[A/B] pin is modulated to maintain a constant voltage across the sense resistor and therefore a constant current into the load. If the 50mV threshold is exceeded for $t_{FLT}$ , the circuit breaker is tripped and the GATE pin for the affected 3V supply's external MOSFET is immediately pulled low.   |
| 3<br>34    | 12VGATEA<br>12VGATEB   | 12V Gate Drive Outputs: Each pin connects to the gate of an external P-Channel MOSFET. During power-up, the $C_{GATE}$ and the $C_{GS}$ of the MOSFETs are connected to a 25 $\mu\text{A}$ current sink. This controls the value of $dv/dt$ seen at the source of the MOSFETs. During current limit events, the voltage at this pin is adjusted to maintain constant current through the switch for a period of $t_{FLT}$ . Whenever an overcurrent, thermal shutdown, or input undervoltage fault condition occurs, the GATE pin for the affected slot is immediately brought high. These pins are charged by an internal current source during power-down. Also, the 3V supply for the affected slot is shut-down.   |
| 14<br>23   | 3VGATEA<br>3VGATEB     | 3V Gate Drive Outputs: Each pin connects to the gate of an external N-Channel MOSFET. During power-up, the $C_{GATE}$ and the $C_{GS}$ of the MOSFETs are connected to a 25 $\mu\text{A}$ current source. This controls the value of $dv/dt$ seen at the source of the MOSFETs, and hence the current flowing into the load capacitance. During current limit events, the voltage at this pin is adjusted to maintain constant current through the switch for a period of $t_{FLT}$ . Whenever an overcurrent, thermal shutdown, or input undervoltage fault condition occurs, the GATE pin for the affected slot is immediately brought low. During power-down, these pins are discharged by an internal current source. Also, the 12V supply for the affected slot is shut down. |

## Pin Description (continued)

| Pin Number | Pin Name                 | Pin Function  |
|------------|--------------------------|---|
| 33         | IREF                     | A resistor connected between this pin and GND sets the ADC current measurement gain for the VAUX[A/B] outputs. This resistor must be $23.2k\Omega \pm 1\%$ .  |
| 11<br>26   | VSTBYA<br>VSTBYB         | 3.3V Standby Input Voltage: Required to support PCI Express VAUX output(s). These inputs are the primary supply for the MIC2591B and must be applied at all times for the controller to function properly. Additionally, the SMBus logic and internal registers run off of VSTBY[A/B] to ensure that the chip is accessible during standby modes. A UVLO circuit prevents turn-on of this supply until VSTBY[A/B] rises above its UVLO threshold. Both pins must be connected together at the MIC2591B controller.  |
| 15<br>22   | VAUXA<br>VAUXB           | 3.3VAUX Outputs to PCI Express Card Slots: These outputs connect the 3.3AUX pin of the PCI Express connectors to VSTBY[A/B] via internal 400m $\Omega$ MOSFETs. These outputs are current limited and protected against short-circuit faults.   |
| 44<br>43   | ONA<br>ONB               | Enable Inputs: Rising-edge triggered. Used to enable or disable the MAINA and MAINB (+3.3V and +12V) outputs. The outputs can be switched on by these controls only after the $V_{STBY}$ input supply is valid and stable (i.e., $t_{POR}$ elapses - See the Electrical Characteristics Table). Taking ON[A/B] low after a fault resets the +12V and/or +3.3V fault latches for the affected slot. Tie these pins to GND if using SMI power control. Also, see pin description for /FAULTA and /FAULTB.   |
| 45<br>42   | AUXENA<br>AUXENB         | Enable Inputs: Rising-edge triggered. Used to enable or disable the VAUX[A/B] outputs. The outputs can be switched on by these controls only after the $V_{STBY}$ input supply is valid and stable (i.e., $t_{POR}$ elapses - See the Electrical Characteristics Table). Taking AUXEN[A/B] low after a fault resets the respective slot's Aux Output Fault Latch. Tie these pins to GND if using SMI power control. Also, see pin description for /FAULTA and /FAULTB.  |
| 2<br>35    | CFILTERA<br>CFILTERB     | Overcurrent Timers: Capacitors connected between these pins and GND set the duration of $t_{FLT}$ for each slot. The overcurrent filter delay ( $t_{FLT}$ ) is the amount of time for which a slot remains in current limit before its circuit breaker is tripped.  |
| 6<br>31    | /PWRGDA<br>/PWRGDB       | Power-is-Good Outputs: Open-drain, active-low. Asserted when a slot has been commanded to turn on and has successfully begun delivering power to its respective +12V, +3.3V, and VAUX outputs. Each pin requires an external pull-up resistor to $V_{STBY}$ .   |
| 1<br>36    | /FAULTA<br>/FAULTB       | Fault Outputs: Open-drain, active-low. Asserted whenever the circuit breaker trips due to a fault condition (overcurrent, input undervoltage, overtemperature). Each pin requires an external pull-up resistor to $V_{STBY}$ . Bringing the slot's ON[A/B] pin low resets /FAULT[A/B] if /FAULT[A/B] was asserted in response to a fault condition on one of the slot's MAIN outputs (+12V or +3.3V).<br>/FAULT[A/B] is reset by bringing the slot's AUXEN[A/B] pin low if /FAULT[A/B] was asserted in response to a fault condition on the slot's VAUX output. If a fault condition occurred on both the MAIN and VAUX outputs of the same slot, then both ON[A/B] and AUXEN[A/B] must be brought low to deassert the /FAULT[A/B] output.  |
| 9<br>28    | /FORCE_ONA<br>/FORCE_ONB | Enable Inputs: Active-low, level-sensitive. Asserting a /FORCE_ON[A/B] input will turn on all three of the respective slot's outputs (+12V, +3.3V, and VAUX), while specifically defeating all protections on those supplies. This explicitly includes all overcurrent and short circuit protections, and on-chip thermal protection for the VAUX[A/B] supplies. Additionally included are the UVLO protections for the +3.3V and +12V main supplies. The /FORCE_ON[A/B] pins do <u>not</u> disable UVLO protection for the VAUX[A/B] supplies. These input pins are intended for diagnostic purposes only. Asserting /FORCE_ON[A/B] will cause the respective slot's /PWRGD[A/B] and /FAULT[A/B] pins to enter their open-drain state. Note that the SMBus register set will continue to reflect the actual state of each slot's supplies. There is a pair of register bits, accessible via the SMBus, which can be set to disable (unconditionally deassert) either or both of the /FORCE_ON[A/B] pins -- See CNTRL[A/B] Register Bit D[2]. |

**Pin Description (continued)**

| Pin Number          | Pin Name         | Pin Function   |
|---------------------|------------------|--|
| 4<br>38             | GPI_A0<br>GPI_B0 | General Purpose Inputs: The states of these two inputs are available by reading the Common Status Register, Bits [4:5]. If not used, connect each pin to GND.  |
| 39                  | A2               | SMBus Address Select Pins: Connect to ground or leave open in order to   |
| 40<br>41            | A1<br>A0         | program device SMBus base address. These inputs have internal pull-up resistors to V <sub>STBY</sub> [A/B].  |
| 48                  | SDA              | SMBus Data: Bidirectional SMBus data line.   |
| 47                  | SCL              | SMBus Clock: Input.  |
| 37                  | /INT             | Interrupt Output: Open-drain, active-low. Asserted whenever a power fault is detected if the INTMSK bit (CS Register Bit D[3]) is a logical "0". This output is cleared by performing an "echo reset" to the appropriate fault bit(s) in the STAT[A/B] and/or CS registers. This pin requires an external pull-up resistor to V <sub>STBY</sub> .  |
| 17<br>46            | GND              | 2 Pins, IC Ground Connections: Tie directly to the system's analog GND plane directly at the device.   |
| 20                  | RFILTER[A&B]     | Connecting this pin to GND through a 110k $\Omega$ , 1% resistor will provide a significant improvement in timeout duration accuracy for slow overcurrent faults on Slot A and Slot B. If left floating (NC), overcurrent timeout duration accuracy is determined by the specification for V <sub>FILTER</sub> and I <sub>FILTER</sub> . Please see the "Circuit Breaker Function" text in the "Functional Description" section for more detail. |
| 7<br>18<br>19<br>30 | NC               | Reserved: Make no external connections to these pins.  |

**Absolute Maximum Ratings<sup>(1)</sup>**

## Supply Voltages

|                             |                           |
|-----------------------------|---------------------------|
| 12VIN[A/B] .....            | 14V                       |
| 3VIN[A/B], VSTBY[A/B] ..... | 7V                        |
| Any Logic Pin.....          | -0.5V (min) to 3.6V (max) |

Output Current (/FAULT[A/B], /INT, SDA)..... 10mA

Power Dissipation..... Internally Limited

## Lead Temperature (Soldering)

Standard Package (-xBTQ)

(IR Reflow, Peak Temperature)..... 240°C +0°C/-5°C

Pb-Free Package (-xYTQ)

(IR Reflow, Peak Temperature)..... 260°C +0°C/-5°C

Storage Temperature..... -65°C to +150°C

ESD Rating<sup>(3)</sup>Human Body Model .....
 2kV |
Machine Model .....
 200V |**Electrical Characteristics<sup>(4)</sup>**

12V<sub>IN[A/B]</sub> = 12V, 3V<sub>IN[A/B]</sub> = 3.3V, V<sub>STBY[A/B]</sub> = 3.3V, T<sub>A</sub> = 25°C, unless otherwise noted. **Bold** indicates specification applies over the full operating temperature range from 0°C to +70°C.

**Operating Ratings<sup>(2)</sup>**

## Supply Voltages

|                 |                |
|-----------------|----------------|
| 12VIN[A/B]..... | 11.0V to 13.0V |
| 3VIN[A/B].....  | 3.0V to 3.6V   |
| VSTBY[A/B]..... | 3.0V to 3.6V   |

Ambient Temperature (T<sub>A</sub>)..... 0°C to +70°CJunction Temperature (T<sub>J</sub>)..... 125°C

## Package Thermal Resistance

TQFP (θ<sub>JA</sub>) .....
 56.5°C/W |

| Symbol                                  | Parameter                            | Condition  | Min                         | Typ  | Max                     | Units |
|---|--------------------------------------|--|-----------------------------|------|-------------------------|-------|
| <b>Power Control and Logic Sections</b> |                                      |  |                             |      |                         |       |
| I <sub>CC12</sub>                       | Supply Current                       |  |                             | 2.5  | <b>5</b>                | mA    |
| I <sub>CC3.3</sub>                      |                                      |  |                             | 0.5  | <b>1</b>                | mA    |
| I <sub>CCSTBY</sub>                     |                                      |  |                             | 2.5  | <b>5</b>                | mA    |
| V <sub>UVLO(12V)</sub>                  | Undervoltage Lockout Thresholds      |  |                             |      |                         |       |
| V <sub>UVLO(3V)</sub>                   | 12VIN[A/B]                           | 12V <sub>IN[A/B]</sub> increasing                                    | <b>8</b>                    | 9    | <b>10</b>               | V     |
| V <sub>UVLO(STBY)</sub>                 | 3VIN[A/B]                            | 3V <sub>IN[A/B]</sub> increasing                                     | <b>2.2</b>                  | 2.5  | <b>2.75</b>             | V     |
|   | VSTBY[A/B]                           | V <sub>STBY[A/B]</sub> increasing                                    | <b>2.8</b>                  | 2.9  | <b>3.0</b>              | V     |
| V <sub>HYSUV</sub>                      | Undervoltage Lockout Hysteresis      |  |                             | 180  |                         | mV    |
|   | 12V <sub>IN</sub> , 3V <sub>IN</sub> |  |                             |      |                         |       |
| V <sub>HYSSTBY</sub>                    | Undervoltage Lockout Hysteresis      |  |                             | 50   |                         | mV    |
|   | V <sub>STBY[A/B]</sub>               |  |                             |      |                         |       |
| V <sub>UVTH(12V)</sub>                  | Power-Good Undervoltage Thresholds   |  |                             |      |                         |       |
| V <sub>UVTH(3V)</sub>                   | 12VOUT[A/B]                          | 12V <sub>OUT[A/B]</sub> decreasing                                   | <b>10.2</b>                 | 10.5 | <b>10.8</b>             | V     |
| V <sub>UVTH(VAUX)</sub>                 | 3VOUT[A/B]                           | 3V <sub>OUT[A/B]</sub> decreasing                                    | <b>2.7</b>                  | 2.8  | <b>2.9</b>              | V     |
|   | VAUX[A/B]                            | V <sub>AUX[A/B]</sub> decreasing                                     | <b>2.7</b>                  | 2.8  | <b>2.9</b>              | V     |
| V <sub>HYS PG</sub>                     | Power-Good Detect Hysteresis         |  |                             | 30   |                         | mV    |
| V <sub>GATE(12V)</sub>                  | 12VGATE Voltage                      |  | <b>0</b>                    |      | <b>1.5</b>              | V     |
| I <sub>GATE(12VSINK)</sub>              | 12VGATE Sink Current                 | Start Cycle  | <b>15</b>                   | 25   | <b>35</b>               | μA    |
| I <sub>GATE(12VPULLUP)</sub>            | 12VGATE Pull-up Current (Fault Off)  | Any fault condition<br>(V <sub>DD</sub> - V <sub>GATE</sub> ) = 2.5V | <b>-20</b>                  |      |                         | mA    |
| V <sub>GATE(3V)</sub>                   | 3VGATE Voltage                       |  | <b>12V<sub>IN</sub>-1.5</b> |      | <b>12V<sub>IN</sub></b> | V     |
| I <sub>GATE(3VCHARGE)</sub>             | 3VGATE Charge Current                | Start Cycle  | <b>15</b>                   | 25   | <b>35</b>               | μA    |
| I <sub>GATE(3VSINK)</sub>               | 3VGATE Sink Current (Fault Off)      | Any fault condition<br>V <sub>GATE</sub> = 2.5V                      | <b>40</b>                   |      |                         | mA    |

**CFILTER[A/B] Overcurrent Delay Time, Pin 20 (RFILTER[A&B]) Floating or NC**

| V <sub>FILTER</sub> | CFILTER[A/B] Threshold Voltage   |  | <b>1.20</b> | 1.25 | <b>1.30</b> | V  |
|---------------------|--|--|-------------|------|-------------|----|
| I <sub>FILTER</sub> | CFILTER[A/B] Charging Current  | V <sub>12VIN</sub> - V <sub>12VSENSE</sub> > V <sub>THLIMIT</sub><br>and/or<br>V <sub>3VIN</sub> - V <sub>3VSENSE</sub> > V <sub>THLIMIT</sub> | <b>1.80</b> | 2.5  | <b>5.0</b>  | μA |
|                     | Delay(ms) = $\frac{C_{FILTER}(\mu F) \times V_{FILTER}(V)}{I_{FILTER}(\mu A)} \times 10^3$ |  |             |      |             |    |

**Notes:**

- Exceeding measurements given within the "Absolute Maximum Ratings" section may damage the device.
- The device is not guaranteed to function outside of the measurements given in the "Operating Ratings" section.
- Devices are ESD sensitive. Employ proper handling precautions. The human body model is 1.5kΩ in series with 100pF.
- Specification for packaged product only.



**Electrical Characteristics (continued)<sup>(5)</sup>**

| Symbol   | Parameter  | Condition  | Min         | Typ        | Max        | Units    |
|--|--|--|-------------|------------|------------|----------|
| <b>C<sub>FILTER</sub> Overcurrent Delay Time, Pin 20 grounded through R<sub>FILTER</sub>[A&amp;B] = 110 kΩ, 1%</b> |  |  |             |            |            |          |
| SF   | C <sub>FILTER</sub> Overcurrent Delay Scaling Factor<br>Delay(ms) = C <sub>FILTER</sub> (μF) × R <sub>FILTER</sub> (kΩ) × SF | V <sub>12VIN</sub> - V <sub>12VSENSE</sub> > V <sub>THLIMIT</sub><br>and/or<br>V <sub>3VIN</sub> - V <sub>3VSENSE</sub> > V <sub>THLIMIT</sub> | <b>4.4</b>  | 5          | <b>5.6</b> |          |
| V <sub>THLIMIT</sub>   | Current Limit Threshold Voltages<br>12V[A/B] supplies<br>3.3V[A/B] supplies  | V <sub>12VIN</sub> - V <sub>12VSENSE</sub>   | <b>45</b>   | 50         | <b>55</b>  | mV       |
|  |  | V <sub>3VIN</sub> - V <sub>3VSENSE</sub>   | <b>45</b>   | 50         | <b>55</b>  | mV       |
| V <sub>THFAST</sub>  | 12VOUT[A/B] and 3VOUT[A/B]<br>Fast-Trip Threshold Voltages   | V <sub>12VIN</sub> - V <sub>12VSENSE</sub>   | <b>90</b>   | 100        | <b>110</b> | mV       |
|  |  | V <sub>3VIN</sub> - V <sub>3VSENSE</sub>   | <b>135</b>  | 150        | <b>165</b> | mV       |
|  |  |  |             | Disabled   |            |          |
| I <sub>12VSENSE[A/B]</sub>   | 12VSENSE[A/B] Input current  |  |             | 0.35       |            | μA       |
| I <sub>3VSENSE[A/B]</sub>  | 3VSENSE[A/B] Input current   |  |             | 0.35       |            | μA       |
| V <sub>IL</sub>  | LOW-Level Input Voltage<br>ON[A/B], AUXEN[A/B], GPI_[A0/B0],<br>/FORCE_ON[A/B]   |  | <b>-0.5</b> |            | <b>0.8</b> | V        |
| V <sub>OL</sub>  | Output LOW Voltage<br>/FAULT[A/B], /PWRGD[A/B],<br>/INT, SDA   | I <sub>OL</sub> = 3mA  |             |            | <b>0.4</b> | V        |
| V <sub>IH</sub>  | HIGH-Level Input Voltage<br>ON[A/B], AUXEN[A/B], GPI_[A0/B0],<br>/FORCE_ON[A/B], A[0-2], SCL, SDA                            |  | <b>2.1</b>  |            | <b>3.6</b> | V        |
| R <sub>PULLUP(A0 - A2)</sub>   | Internal Pull-ups from A[0-2]<br>to V <sub>STBY</sub> [A/B]  |  |             | 40         |            | kΩ       |
| I <sub>LKG,OFF(12VIN[A/B])</sub>   | 12VIN[A/B] Input leakage current<br>12VIN[A/B] = OFF; 3VIN[A/B] = OFF  | V <sub>STBY</sub> = V <sub>STBY</sub> [A/B] = +3.3V,   |             | 1          |            | μA       |
| I <sub>LKG,OFF(3VIN[A/B])</sub>  | 3VIN[A/B] Input leakage current<br>3VIN[A/B] = OFF; 12VIN[A/B] = OFF   | V <sub>STBY</sub> = V <sub>STBY</sub> [A/B] = +3.3V,   |             | 1          |            | μA       |
| I <sub>IL</sub>  | Input Leakage Current<br>SCL, ON[A/B], AUXEN[A/B],<br>/FORCE_ON[A/B]   |  |             |            | <b>±5</b>  | μA       |
| I <sub>LKG(OFF)</sub>  | Off-State Leakage Current<br>/FAULT[A/B], /PWRGD[A/B],<br>/INT, SDA, GPI_[A0/B0]   | GPI_[A0/B0]: I <sub>LKG</sub> for these two pins<br>measured with V <sub>AUX</sub> OFF   |             |            | <b>±5</b>  | μA       |
| T <sub>OV</sub>  | Overtemperature Shutdown and Reset<br>Thresholds, with overcurrent on slot   | T <sub>J</sub> increasing, each slot <sup>(6)</sup><br>T <sub>J</sub> decreasing, each slot <sup>(6)</sup>                                     |             | 140<br>130 |            | °C<br>°C |
|  |  | T <sub>J</sub> increasing, both slots <sup>(6)</sup><br>T <sub>J</sub> decreasing, both slots <sup>(6)</sup>                                   |             | 160<br>150 |            | °C<br>°C |
| R <sub>DS(AUX)</sub>   | Output MOSFET Resistance<br>VAUX[A/B] MOSFET   | I <sub>DS</sub> = 375mA, T <sub>J</sub> = 125°C  |             |            | <b>400</b> | mΩ       |
| V <sub>OFF(VAUX)</sub>   | Off-State Output Offset Voltage<br>V <sub>AUX</sub> [A/B]  | V <sub>AUX</sub> [A/B] = Off, T <sub>J</sub> = 125°C   |             |            | <b>50</b>  | mV       |

**Notes:**

- Specification for packaged product only.
- Parameters guaranteed by design. Not 100% production tested.



**Electrical Characteristics (continued)<sup>(7)</sup>**

| Symbol                | Parameter  | Condition  | Min   | Typ         | Max         | Units    |
|-----------------------|--|--|---|-------------|-------------|----------|
| $I_{AUX(THRESH)}$     | Auxiliary Output Current Limit Threshold (Figure 4)          | Current which must be drawn from $V_{AUX}$ to register as a fault  |   | <b>0.84</b> |             | A        |
| $I_{SC(TRAN)}$        | Maximum Transient Short Circuit Current                      | $V_{AUX}$ Enabled, then Grounded   | $I_{MAX} = \frac{V_{STBY[A/B]}}{R_{DS(AUX)}}$ |             |             | A        |
| $I_{LIM(AUX)}$        | Regulated Current after Transient                            | From end of $I_{SC(TRAN)}$ to $C_{FILTER}$ time-out  | <b>0.375</b>                                  | 0.7         | <b>1.35</b> | A        |
| $R_{DIS(12V)}$        | Output Discharge Resistance                                  |  |   | 1600        |             | $\Omega$ |
| $R_{DIS(3V)}$         | 12VOUT[A/B]  | $12V_{OUT[A/B]} = 6.0V$  |   | 150         |             | $\Omega$ |
| $R_{DIS(VAUX)}$       | 3VOUT[A/B]   | $3V_{OUT[A/B]} = 1.65V$  |   | 430         |             | $\Omega$ |
| $t_{OFF(12V)}$        | 3VAUX[A/B]   | $3V_{AUX[A/B]} = 1.65V$  |   |             |             |          |
| $t_{OFF(12V)}$        | 12V Current Limit Response Time (Figure 2)                   | MIC2591B-2BTQ<br>$C_{GATE} = 25pF$<br>$V_{IN} - V_{SENSE} = 140mV$   |   | 1           | <b>2.0</b>  | $\mu s$  |
| $t_{OFF(3V)}$         | 3.3V Current Limit Response Time (Figure 3)                  | MIC2591B-2BTQ<br>$C_{GATE} = 25pF$<br>$V_{IN} - V_{SENSE} = 140mV^{(8)}$                                     |   | 1           | <b>2.0</b>  | $\mu s$  |
| $t_{SC(TRAN)}$        | VAUX[A/B] Current Limit Response Time (Figure 5)             | $V_{AUX[A/B]} = 0V, V_{STBYA} = V_{STBYB} = +3.3V$   |   | 2.5         | <b>5</b>    | $\mu s$  |
| $t_{PROP(12VFAULT)}$  | Delay from 12V[A/B] Overcurrent Limit to /FAULT output       | MIC2591B-2BTQ<br>$C_{FILTER} = 0$<br>$V_{IN} - V_{SENSE} = 140mV^{(8)}$                                      |   | 1           |             | $\mu s$  |
| $t_{PROP(3VFAULT)}$   | Delay from 3V[A/B] Overcurrent Limit to /FAULT[A/B] Output   | MIC2591B-2BTQ<br>$C_{FILTER} = 0$<br>$V_{IN} - V_{SENSE} = 140mV^{(8)}$                                      |   | 1           |             | $\mu s$  |
| $t_{PROP(VAUXFAULT)}$ | Delay from VAUX[A/B] Overcurrent limit to /FAULT[A/B] output | MIC2591B-2BTQ<br>limit to /FAULT[A/B] output<br>$C_{FILTER} = 0$<br>$V_{AUX}$ Output Grounded <sup>(8)</sup> |   | 1           |             | $\mu s$  |
| $t_W$                 | ON[A/B], AUXEN[A/B] Pulse Width                              | <b>Note 8</b>  |   | 100         |             | ns       |
| $t_{POR}$             | MIC2591B Power-On Reset Time after VSTBY[A/B] becomes valid  | <b>Note 8</b>  |   | 250         |             | $\mu s$  |

**SMBus Timing**

|       |                                    |                           |            |  |  |         |
|-------|------------------------------------|---------------------------|------------|--|--|---------|
| $t_1$ | SCL (clock) period                 | Figure 1                  | <b>2.5</b> |  |  | $\mu s$ |
| $t_2$ | Data In setup time to SCL HIGH     | Figure 1                  | <b>100</b> |  |  | ns      |
| $t_3$ | Data Out stable after SCL LOW      | Figure 1                  | <b>300</b> |  |  | ns      |
| $t_4$ | Data LOW setup time to SCL LOW     | Start condition, Figure 1 | <b>100</b> |  |  | ns      |
| $t_5$ | Data HIGH hold time after SCL HIGH | Stop condition, Figure 1  | <b>100</b> |  |  | ns      |

**Notes:**

7. Specification for packaged product only.
8. Parameters guaranteed by design. Not 100% production tested.

**Electrical Characteristics (continued)<sup>(9)</sup>**

| Symbol                                   | Parameter                           | Condition | Min  | Typ   | Max | Units |        |
|--|-------------------------------------|-----------|--|-------|-----|-------|--------|
| <b>8-Bit Analog to Digital Converter</b> |                                     |           |  |       |     |       |        |
| Max_Error                                | Total unadjusted error for:         |           |  |       |     |       |        |
|  | Voltage, All Outputs                |           |  |       |     |       |        |
|  | Current, 3VOUT[A/B] and 12VOUT[A/B] |           | Measured as voltage across corresponding external R <sub>SENSE</sub> | -5    |     | +5    | % F.S. |
|  | Current, VAUX[A/B]                  |           | 23.2kΩ resistor from IREF (Pin 33) to GND                            |       | ±5  |       | % F.S. |
| t <sub>CONV</sub>                        | Conversion time                     |           |  | 60    | 100 | ms    |        |
| <b>Resolution Specifications</b>         |                                     |           |  |       |     |       |        |
| V <sub>AUXA</sub>                        | Full Scale Voltage                  |           |  | 4.00  |     | V     |        |
| V <sub>AUXB</sub>                        | LSB of Voltage                      |           |  | 15.62 |     | mV    |        |
|  | Full Scale Current                  |           |  | 375   |     | mA    |        |
|  | LSB of Current                      |           |  | 1.47  |     | mA    |        |
| <b>x4/x8 Values</b>                      |                                     |           |  |       |     |       |        |
| 3V <sub>OUTA</sub>                       | Full Scale Voltage                  |           | External R <sub>SENSE</sub> = 13.0mΩ                                 | 3.85  |     | V     |        |
| 3V <sub>OUTB</sub>                       | LSB of Voltage                      |           |  | 15.0  |     | mV    |        |
|  | Full Scale Current                  |           |  | 4.23  |     | A     |        |
|  | LSB of Current                      |           |  | 16.5  |     | mA    |        |
| 12V <sub>OUTA</sub>                      | Full Scale Voltage                  |           | External R <sub>SENSE</sub> = 20.0mΩ                                 | 13.8  |     | V     |        |
| 12V <sub>OUTB</sub>                      | LSB of Voltage                      |           |  | 53.9  |     | mV    |        |
|  | Full Scale Current                  |           |  | 2.75  |     | A     |        |
|  | LSB of Current                      |           |  | 10.7  |     | mA    |        |
| <b>x16 Values</b>                        |                                     |           |  |       |     |       |        |
| 3V <sub>OUTA</sub>                       | Full Scale Voltage                  |           | External R <sub>SENSE</sub> = 13.0mΩ                                 | 3.85  |     | V     |        |
| 3V <sub>OUTB</sub>                       | LSB of Voltage                      |           |  | 15.0  |     | mV    |        |
|  | Full Scale Current                  |           |  | 4.23  |     | A     |        |
|  | LSB of Current                      |           |  | 16.5  |     | mA    |        |
| 12V <sub>OUTA</sub>                      | Full Scale Voltage                  |           | External R <sub>SENSE</sub> = 10.0mΩ                                 | 13.8  |     | V     |        |
| 12V <sub>OUTB</sub>                      | LSB of Voltage                      |           |  | 53.9  |     | mV    |        |
|  | Full Scale Current                  |           |  | 5.5   |     | A     |        |
|  | LSB of Current                      |           |  | 21.5  |     | mA    |        |

**Notes:**

9. Specification for packaged product only.

# Timing Diagrams

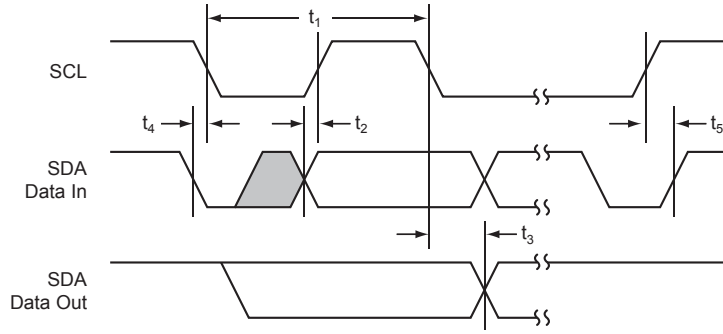


Figure 1. SMBus Timing

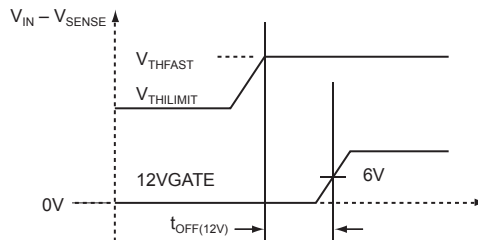


Figure 2. 12V Current Limit Response Timing

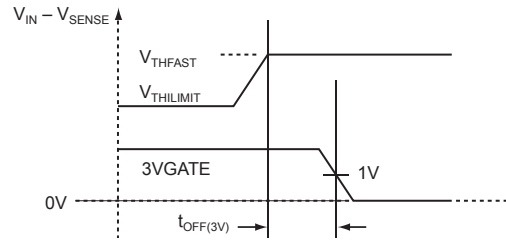


Figure 3. 3V Current Limit Response Timing

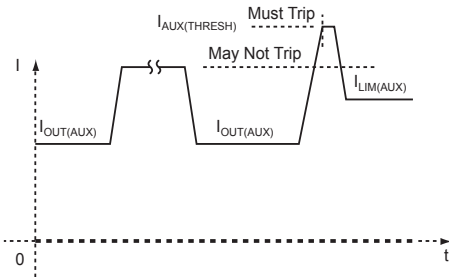


Figure 4. VAUX Current Limit Threshold



















Figure 5. VAUX Current Limit Response Timing


# Typical Characteristics

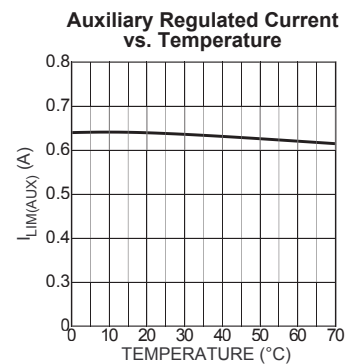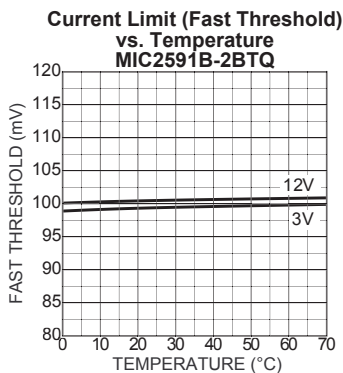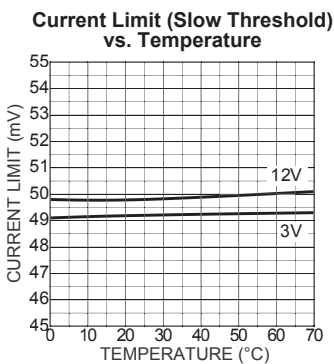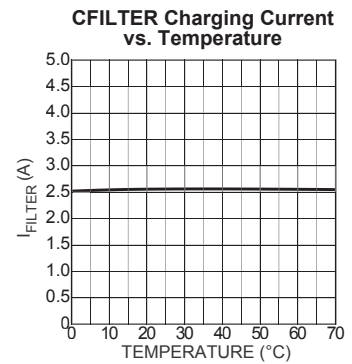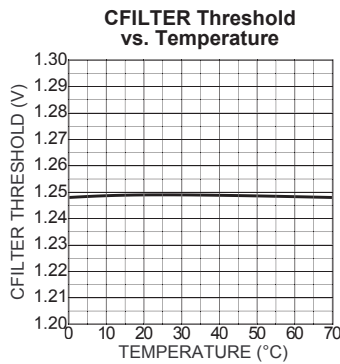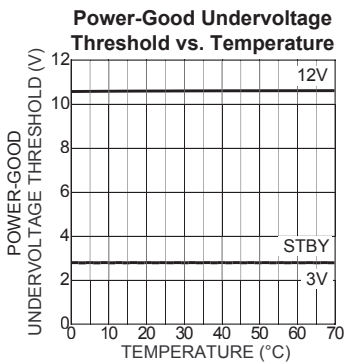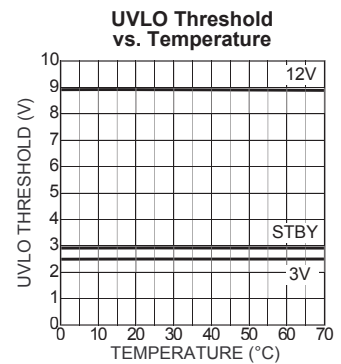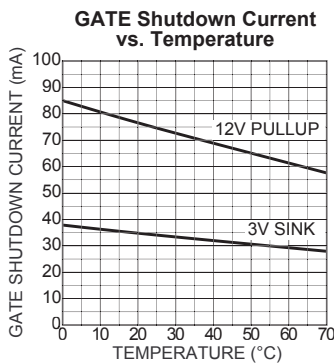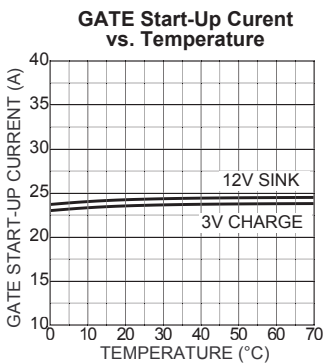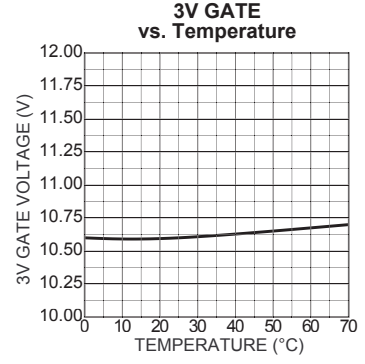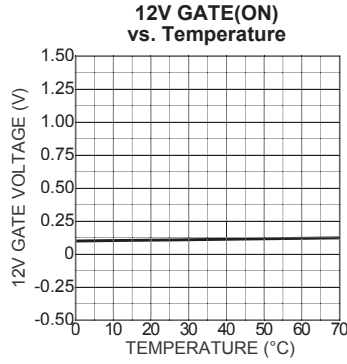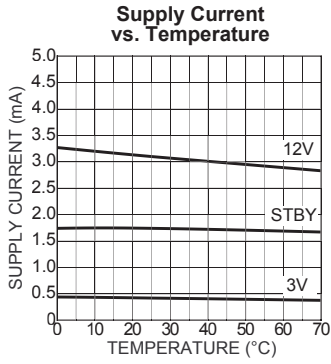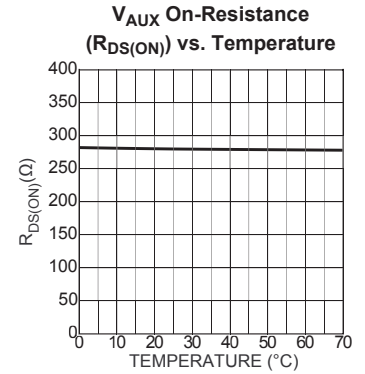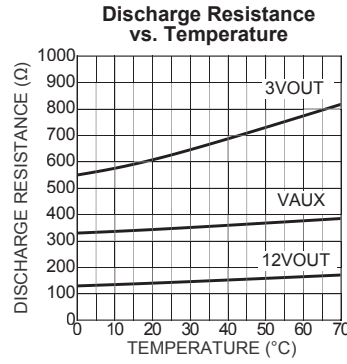

### Typical Characteristics (cont.)

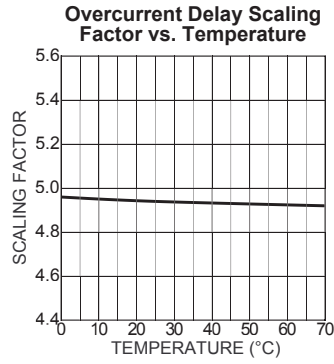







### Test Circuit

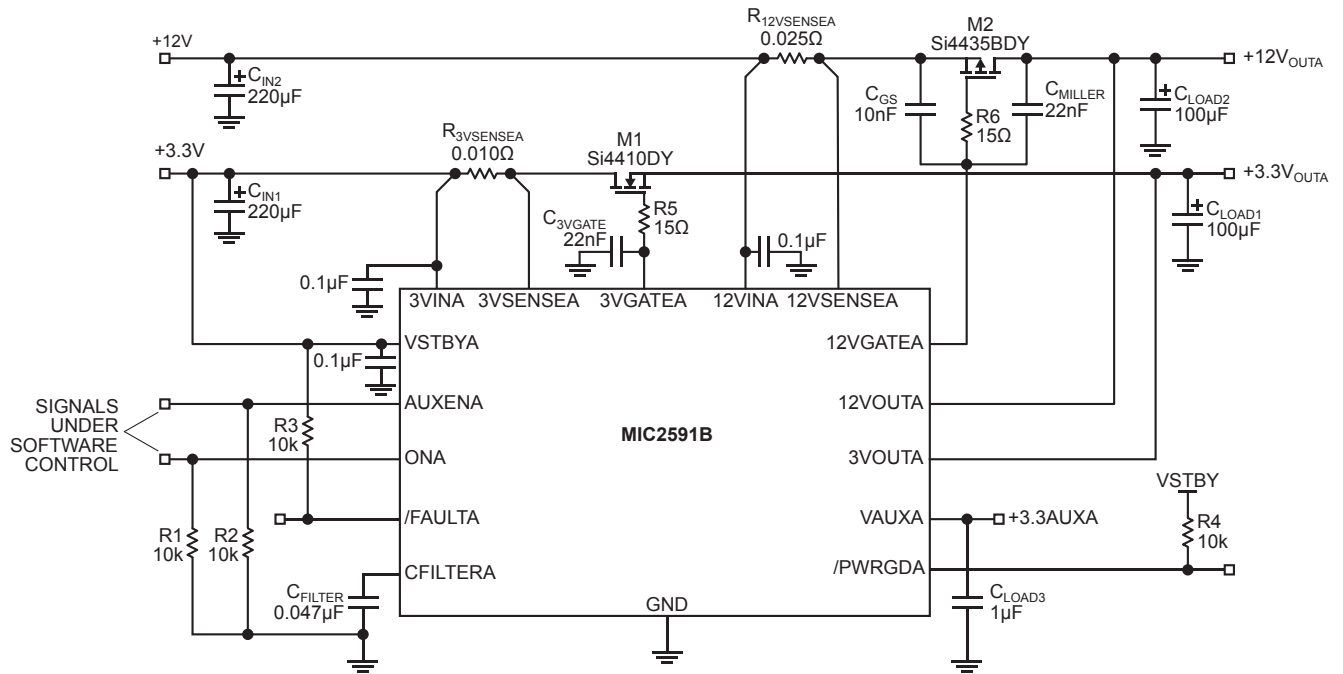





(Additional pins omitted for clarity - Slot A shown only)

**MIC2591B Test Circuit**

# Functional Characteristics

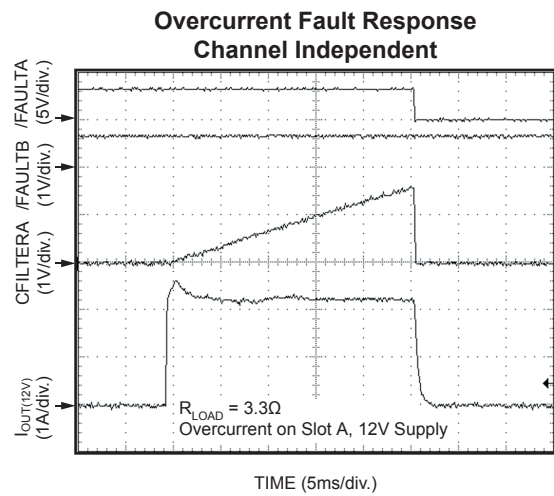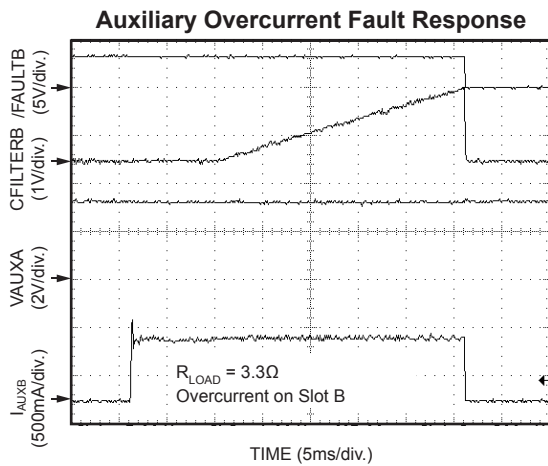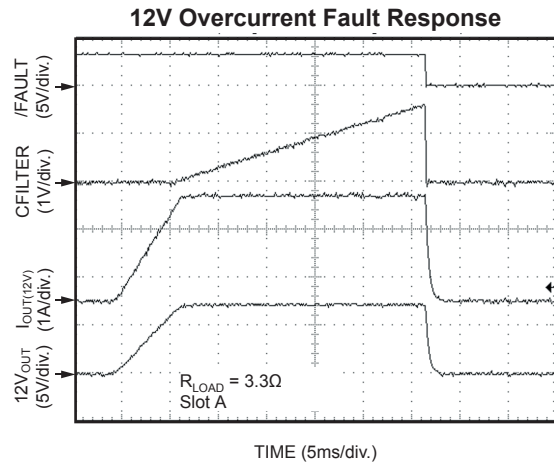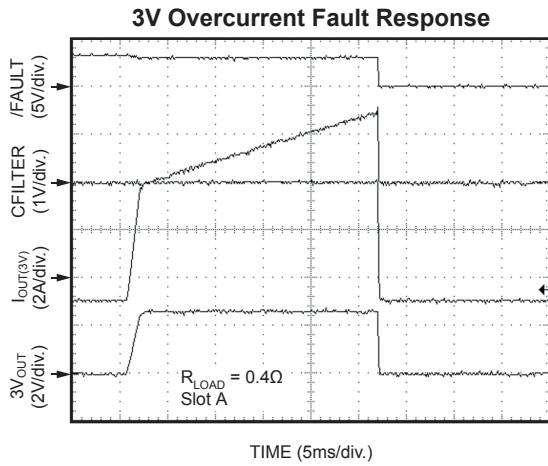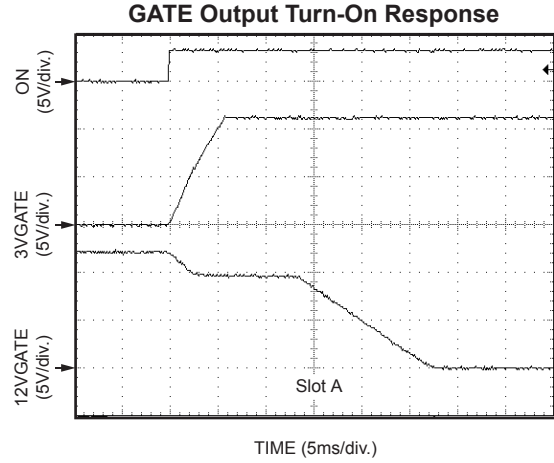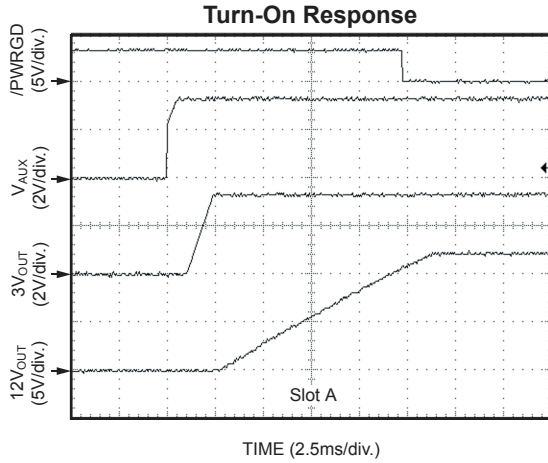


### Functional Characteristics (cont.)

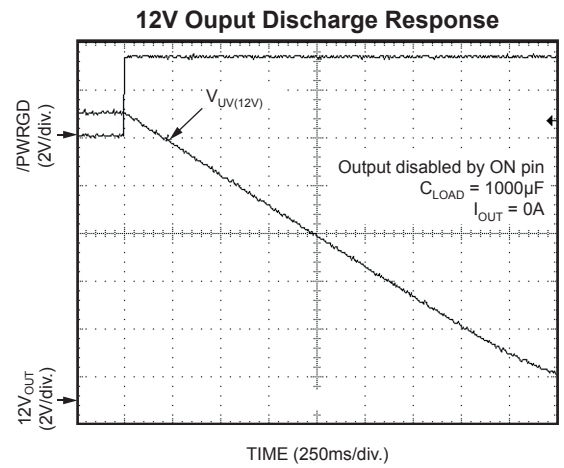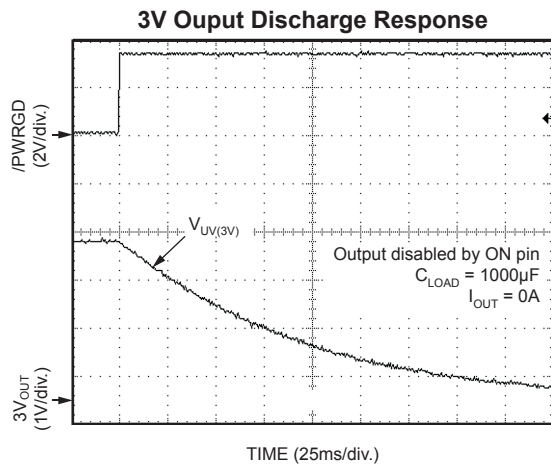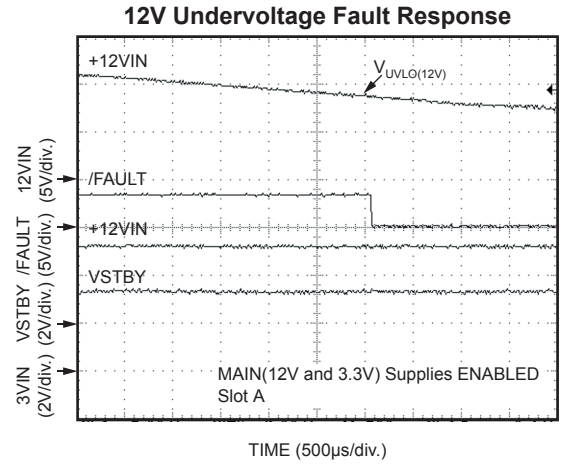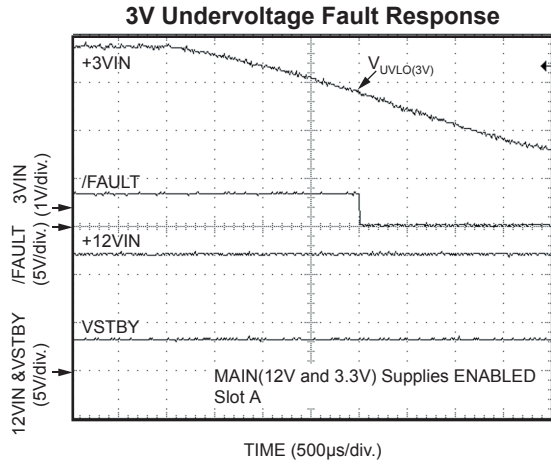



# Function Block Diagram

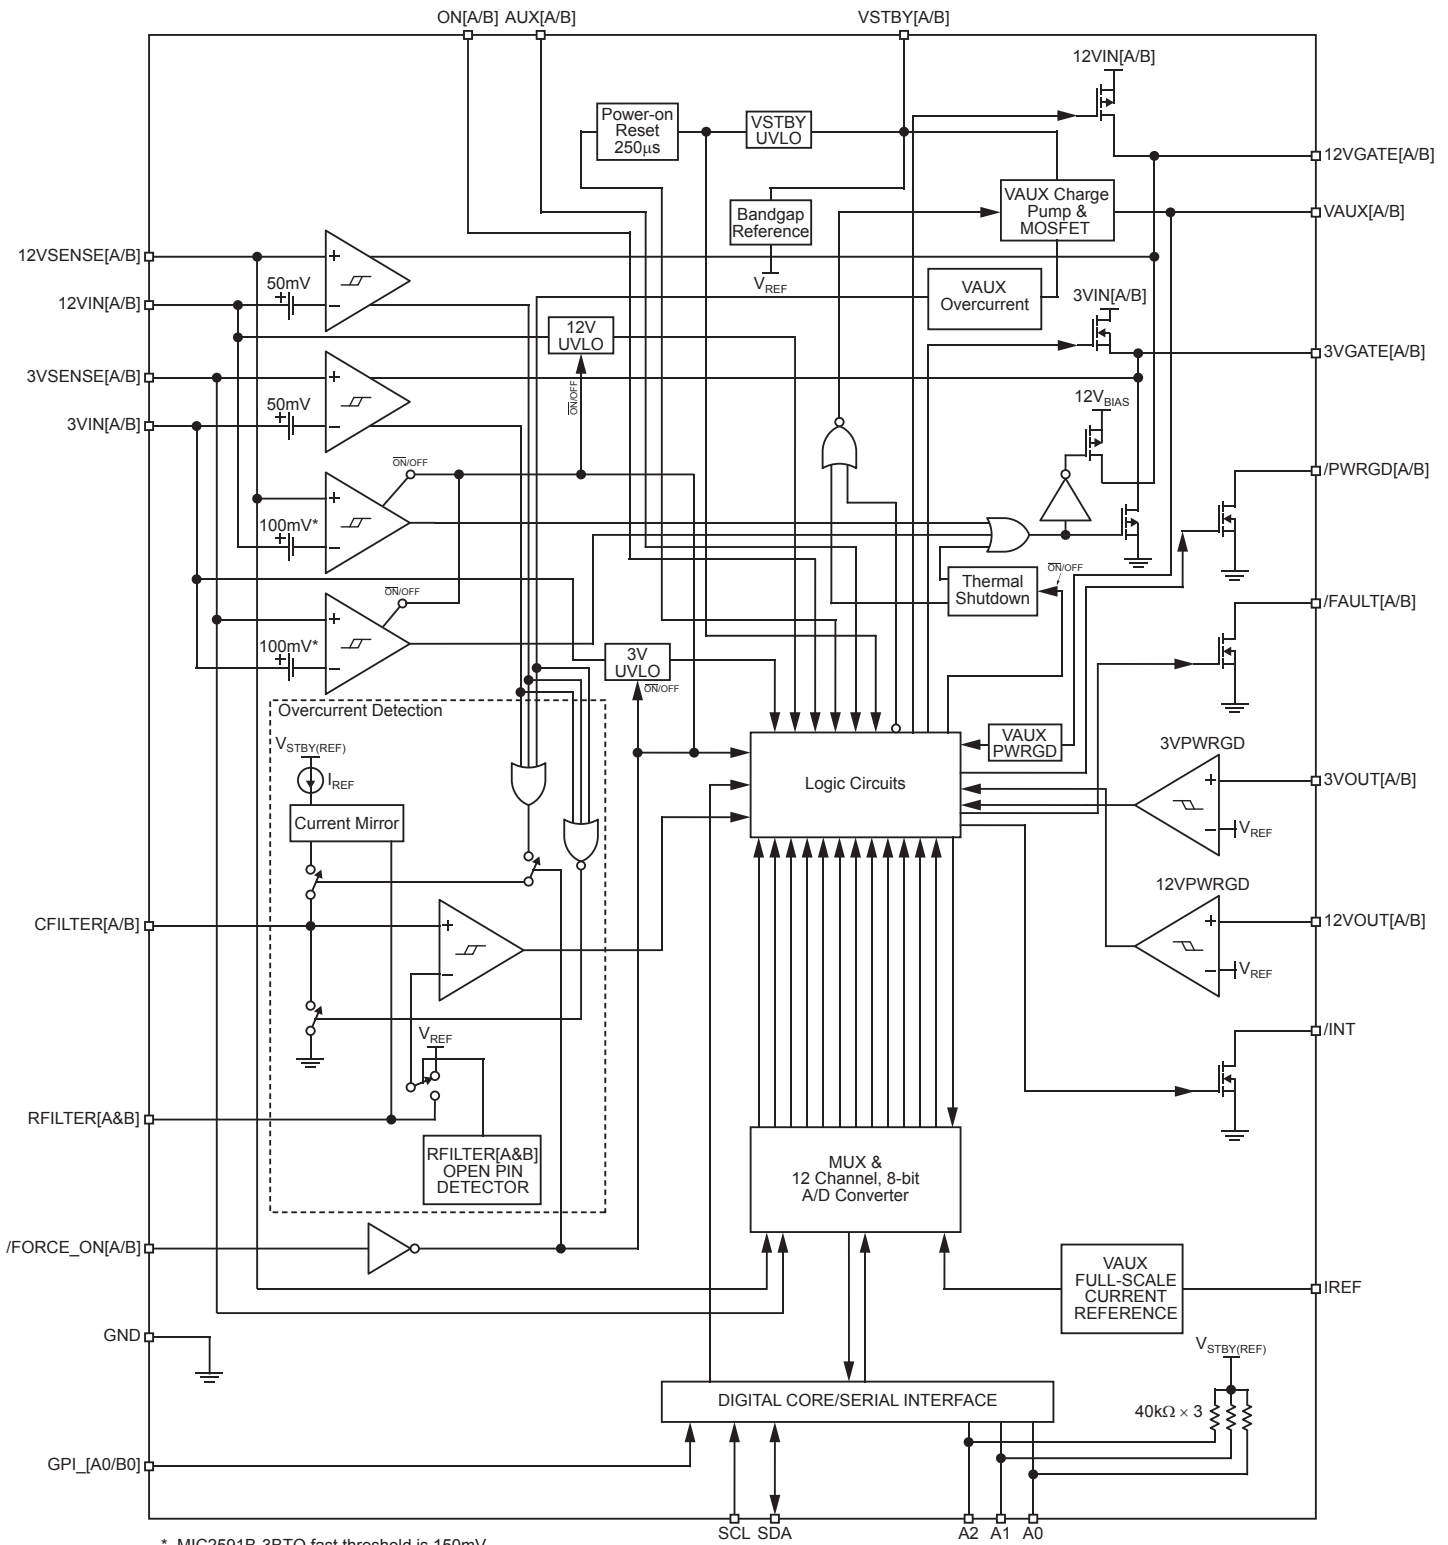

\* MIC2591B-3BTQ fast threshold is 150mV  
 MIC2591B-5BTQ fast threshold is disabled  
 Contact factory for availability

**MIC2591B Block Diagram**

## Functional Description

### Hot Swap Insertion

When circuit boards are inserted into systems carrying live supply voltages ("hot-plugged"), high inrush currents often result due to the charging of bulk capacitance that resides across the circuit board's supply pins. This transient inrush current can cause the system's supply voltages to temporarily go out of regulation, causing data loss or system lock-up. In more extreme cases, the transients occurring during a hot-plug event may cause permanent damage to connectors or on-board components.

The MIC2591B addresses these issues by limiting the inrush currents to the load (PCI Express Board), and thereby controlling the rate at which the load's circuits turn-on. In addition to this inrush current control, the MIC2591B offers input and output voltage supervisory functions and current limiting to provide robust protection for both the system and circuit board.

### System Interface

The MIC2591B employs two system interfaces: the hardware Hot-Plug Interface (HPI) and the System Management Interface (SMI). The HPI includes ON[A/B], AUXEN[A/B], as well as /FAULT[A/B]; the SMI consists of SDA, SCL, and /INT, whose signals conform to the levels and timing of the SMBus specification. The MIC2591B can be operated exclusively from the SMI, or can employ the HPI for power control while continuing to use the SMI for access to all but the power control registers.

In addition to the basic power control features of the MIC2591B accessible by the HPI, the SMI also gives the host access to the following information from the part:

- Output voltage and current from each supply.
- Fault conditions occurring on each supply.
- GPI\_[A0/B0] pin status.

When using the System Management Interface for power control, do not use the Hot-Plug Interface. Conversely, when using the Hot-Plug Interface for power control, do not execute power control commands over the System Management Interface bus (all other register accesses via the SMI bus remain permissible while in the HPI control mode). When utilizing the SMI exclusively, the HPI input pins (ON[A/B], AUXEN[A/B], and /FORCE\_ON[A/B]) should be configured as shown below in Figure 6 (Disabling HPI when SMI control

is used). This configuration safeguards the power slots in the event that the SMBus communication link is disconnected for any reason.

Additionally, when utilizing the HPI exclusively, the SMBus (or SMI) will be inactive if the input pins (SDA, SCL, A0, A1, and A2) are configured as shown in Figure 6 below (Disabling SMI when HPI Control is used).

### Power Stability and Power-On Reset

The MIC2591B utilizes V<sub>STBY</sub>[A/B] as the main supply input source. V<sub>STBY</sub>[A/B] is required for proper operation of the MIC2591B's SMBus and registers and must be applied at all times. To ensure that the MIC2591B controller operates properly, the V<sub>STBY</sub> input must be stable and remain above the undervoltage lockout (UVLO) threshold once applied. Sufficient input bulk capacitance should be used to prevent the supply from "drooping", causing V<sub>STBY</sub>[A/B] to fall below the UVLO threshold. Also, decoupling capacitors should be placed at each of the MIC2591B inputs in order to filter high frequency noise transients.

V<sub>STBY</sub> must be the first supply input applied followed by the MAIN supply inputs of 12V<sub>IN</sub> and 3V<sub>IN</sub>. A Power-On Reset (POR) cycle is initiated after V<sub>STBY</sub>[A/B] rises above its UVLO threshold and remains valid at that voltage for 250μs. All internal registers are cleared after POR. If V<sub>STBY</sub>[A/B] is recycled, the MIC2591B enters a new power-on-reset cycle. The SMBus is ready for access at the end of the POR cycle (250μs after V<sub>STBY</sub>[A/B] is valid). During t<sub>POR</sub>, all outputs remain off. In most applications, the total POR interval will consist of the time required to charge the V<sub>STBY</sub> input (bypass) capacitance to the UVLO threshold plus the internal t<sub>POR</sub>. The following equation is used to approximate the total POR interval:

$$t_{\text{POR\_TOTAL}}(\mu\text{s}) = \left\{ \left[ \frac{C_{\text{STBY}}(\mu\text{F}) \times V_{\text{ULVO}}(\text{STBY})}{I_{\text{CHARGE}}(\text{STBY})(\text{A})} \right] \times 10^{-6} \right\} + t_{\text{POR}}(\mu\text{s})$$

where C<sub>STBY</sub> is the V<sub>STBY</sub> input bulk bypass capacitance and I<sub>CHARGE</sub>(STBY) is the current supplied by the V<sub>STBY</sub> source to charge the capacitance.

### Power-Up Cycle

#### Enabling the GATE output

When a slot's MAIN supplies are off, the 12VGATE pin is held high with an internal pull-up. Similarly, the 3VGATE pin is internally held low. When the MAIN supplies of the MIC2591B

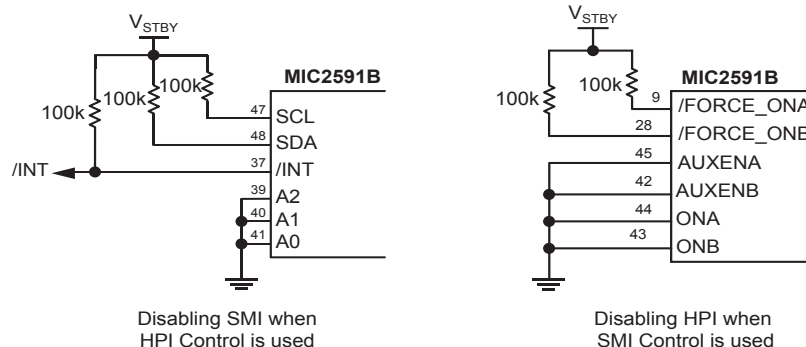


Figure 6. Input Pin Configuration for Disabling HPI/SMI Control

are enabled by asserting ON[A/B], the 3VGATE[A/B] and 12VGATE[A/B] pins are each connected to a constant current supply. These supplies are each nominally 25 $\mu$ A. For a slot's 3VGATE pin, this is a current source; for the 12VGATE pin, this is a current sink.

#### Inrush Current and Load Dominated Start-up

The expected maximum inrush current can be calculated by using the following equation:

$$\text{INRUSH} \equiv |I_{\text{GATE}}| \times \frac{C_{\text{LOAD}}}{C_{\text{GATE}}} \approx 25\mu\text{A} \times \frac{C_{\text{LOAD}}}{C_{\text{GATE}}}$$

where  $|I_{\text{GATE}}|$  is the GATE pin current,  $I_{\text{GATE}(3\text{VCHARGE})}$  or  $I_{\text{GATE}(12\text{VSINK})}$ ,  $C_{\text{LOAD}}$  is the load capacitance, and  $C_{\text{GATE}}$  is the total GATE capacitance ( $C_{\text{ISS}}$  of the external MOSFET and any external capacitance connected from the GATE output pin to the GATE reference – GND or source).

For the 3.3V outputs and 12V outputs (if no external 12VGATE output capacitors are implemented), the following equation is used to determine the output slew rate.

$$dV_{\text{OUT}}/dt = \frac{I_{\text{LIM}(3\text{V}/12\text{V})}}{C_{\text{LOAD}(3\text{V}/12\text{V})}}$$

Consequently, the overcurrent timer delay must be programmed to exceed the time it will take to charge the output load to the input rail voltage level.

#### MAIN Outputs (Start-up Delay and Slew-Rate Control)

The 3.3V outputs act as source followers. In this mode of operation,  $V_{\text{SOURCE}} = [V_{\text{GATE}} - V_{\text{TH(ON)}}]$  until the associated output reaches 3.3V. The voltage on the gate of the MOSFET will then continue to rise until it reaches 12V, which ensures minimum  $R_{\text{DS(ON)}}$ . Note that a delay exists between the ON command to a slot and the appearance of voltage at the slot's 3.3V output. This delay is the time required to charge the 3VGATE output up to the threshold voltage of the external MOSFET (typically about 3V).

$$t_{3\text{VDLY}} = \frac{(C_{\text{GATE}} \times V_{\text{GS(TH)}})}{I_{\text{GATE}(3\text{VCHARGE})}}$$

The source (output) side of the external MOSFET will reach the drain voltage in a time given by:

$$t_{3\text{V(SOURCE_DRAIN)}} = t_{3\text{VDLY}} + \frac{(C_{\text{LOAD}} \times V_{\text{DRAIN}})}{I_{\text{LIM}(3\text{V})}}$$

For the 12V outputs, each MOSFET is configured as a Miller integrator (by virtue of  $C_{\text{MILLER}}$ , which is connected between the MOSFET's gate and drain). In this configuration, the feedback action from drain to gate of the MOSFET causes the voltage at the drain of the MOSFET to slew in a linear fashion at a rate which satisfies the following equation:

$$dv/dt(12\text{V}) = -\left(\frac{I_{\text{GATE}}}{C_{\text{MILLER}}}\right)$$

A delay exists between the ON command to a slot and the appearance of voltage at the slot's 12V output. For a slot's 12V output, that delay is given by the time required for the capacitor from the gate of the MOSFET to its source (typically five times the value of  $C_{\text{MILLER}}$ ) to charge to the threshold

voltage of the MOSFET (typically about 3V). In this instance, the delay before the output voltage starts ramping can be approximated by:

$$t_{12\text{VDLY}} \approx \frac{(C_{\text{GATE(TOTAL)}} \times V_{\text{GS(TH)}})}{|I_{\text{GATE}}|}$$

where  $C_{\text{GATE(TOTAL)}}$  is the sum of the  $C_{\text{GS}}$  of the external MOSFET, any external capacitance from the GATE output of the MIC2591B to the source of the MOSFET, and  $C_{\text{MILLER}}$  (external, if used).

Table 1 approximates the output slew-rate for various values of  $C_{\text{GATE}}$  when start-up is dominated by GATE capacitance (external  $C_{\text{GATE}}$  from GATE pin to ground plus  $C_{\text{GS}}$  of the external MOSFET for the 3.3V rail;  $C_{\text{MILLER}}$  for the 12V rail).


| $ I_{\text{GATE}}  = 25\mu\text{A}$      |              |
|--|--------------|
| $C_{\text{GATE}}$ or $C_{\text{MILLER}}$ | dv/dt (load) |
| 0.01 $\mu\text{F}$ *                     | 2.5V/ms      |
| 0.022 $\mu\text{F}$ *                    | 1.136V/ms    |
| 0.047 $\mu\text{F}$                      | 0.532 V/ms   |
| 0.1 $\mu\text{F}$                        | 0.250V/ms    |

\* Values in this range will be affected by the internal parasitic capacitances of the MOSFETs used, and should be verified experimentally.

**Table 1. 3.3V and 12V Output Slew-Rate Selection for Gate Capacitance Dominated Start-up**

#### Power-Down Cycle

When one or more PCI slots are disabled via the MIC2591B output control pins, ON[A/B] or AUXEN[A/B], the output voltage for each supply will discharge as a function of the RC time constant produced by the controller's internal resistance ( $R_{\text{DIS}}$ ) connected to the output and the load capacitance ( $C_{\text{LOAD}}$ ). The typical value of  $R_{\text{DIS}}$  for each supply is listed in the Electrical Characteristics Table. The charts below in Figure 7 display curves of the fall time (90% - 10%) as a function of the output load capacitance for both the 3V and 12V MAIN outputs.

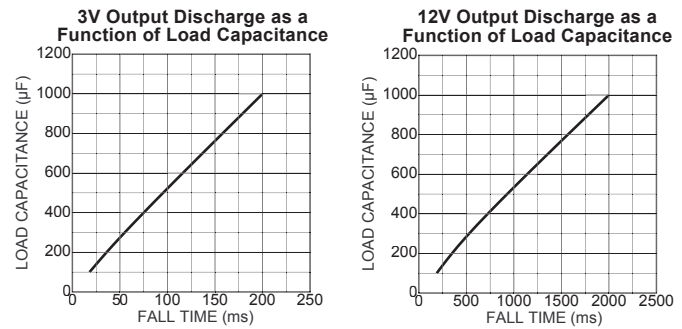

**Figure 7. 3V and 12V Output Discharge vs. Load Capacitance**

#### Standby Mode

Standby mode is entered when one or more of the MAIN supply inputs (12VIN and/or 3VIN) is below its respective UVLO threshold or OFF. The MIC2591B also supplies 3.3V auxiliary outputs (VAUX[A/B]), satisfying PCI Express

specifications. These outputs are fed via the VSTBY[A/B] input pins and controlled by the AUXEN[A/B] input pins or via their respective bits in the Control Registers. These outputs are independent of the MAIN outputs (12VIN[A/B] and 3VIN[A/B]). Should the MAIN supply inputs move below their respective UVLO thresholds, VAUX[A/B] will still function as long as VSTBY[A/B] is present. Prior to standby mode, ONA and ONB (or the Control Registers' MAINA and MAINB bits) inputs should be deasserted or the MIC2591B will assert /FAULT[A/B] and /INT (if interrupts are enabled) output signals, if an undervoltage condition on the MAIN supply inputs is detected.

### Circuit Breaker Function

The MIC2591B provides an electronic circuit breaker function that protects against excessive loads, such as short circuits, at each supply. When the current from one or more of a slot's MAIN outputs exceeds the current limit threshold ( $I_{LIM} = 50mV/R_{SENSE}$ ) for a duration greater than  $t_{FLT}$ , the circuit breaker is tripped and both MAIN supplies (all outputs except VAUX[A/B]) are shut off. Should the load current cause a MAIN output's  $V_{SENSE}$  to exceed  $V_{THFAST}$ , the outputs are immediately shut off with no delay. Undervoltage conditions on the MAIN supply inputs also trip the circuit breaker, but only when the MAIN outputs are enabled (to signal a supply input brown-out condition).

The VAUX[A/B] outputs have a different circuit-breaker function. The VAUX[A/B] circuit breakers do not incorporate a fast-trip detector, instead they regulate the output current into a fault to avoid exceeding their operating current limit. The circuit breaker will trip due to an overcurrent on VAUX[A/B] when the fault timer expires. This use of the  $t_{FLT}$  timer prevents the circuit breaker from tripping prematurely due to brief current transients.

Following a fault condition, the outputs can be turned on again via the ON inputs (if the fault occurred on one of the MAIN outputs), via the AUXEN inputs (if the fault occurred on the AUX outputs), or by cycling both ON and AUXEN (if faults occurred on both the MAIN and AUX outputs). A fault

condition can alternatively be cleared under SMI control of the ENABLE bits in the CNTRL[A/B] registers (see Register Bits D[1:0]). When the circuit breaker trips, /FAULT[A/B] will be asserted if the outputs were enabled through the Hot-Plug Interface inputs. At the same time, /INT will be asserted (unless interrupts are masked). Note that /INT is deasserted by writing a Logic 1 back into the respective fault bit position(s) in the STAT[A/B] register or the Common Status Register.

The response time ( $t_{FLT}$ ) of the MIC2591B's primary overcurrent detector is set by external capacitors at the CFILTER[A/B] pins to GND. For Slot A, CFILTER[A] is located at Pin 2; for Slot B, CFILTER[B] is located at Pin 35. For a given response time, the value for  $C_{FILTER[A/B]}$  is given by:

$$C_{FILTER[A/B]}(\mu F) = \frac{t_{FLT[A/B]}(ms) \times I_{FILTER}(\mu A)}{V_{FILTER}(V) \times 10^3}$$

where  $t_{FLT[A/B]}$  is the desired response time and quantities  $I_{FILTER}$  and  $V_{FILTER}$  are specified in the MIC2591B's "Electrical Characteristics" table.

For applications that require a more accurate response time for a given  $C_{FILTER[A/B]}$  tolerance, the MIC2591B employs a patent-pending technique that improves response time accuracy by more than a factor of two. A 110k $\Omega$ , 1% resistor connected from the MIC2591B's RFILTER[A&B] pin (Pin 20) to GND can be used. In this case, the value for  $C_{FILTER[A/B]}$  for a desired response time ( $t_{FLT}$ ) is given by:

$$C_{FILTER[A/B]}(\mu F) = \frac{t_{FLT}(ms)}{R_{FILTER[A/B]}(k\Omega) \times SF}$$

where  $t_{FLT}$  is the desired response time,  $R_{FILTER[A&B]}$  is 110k $\Omega$ , and "SF" is the CFILTER[A/B] response time "Scaling Factor" in the "Electrical Characteristics" table.

### Thermal Shutdown

The internal VAUX[A/B] MOSFETs are protected against damage not only by current limiting, but by dual-mode over-temperature protection as well. Each slot controller on the MIC2591B is thermally isolated from the other. Should an

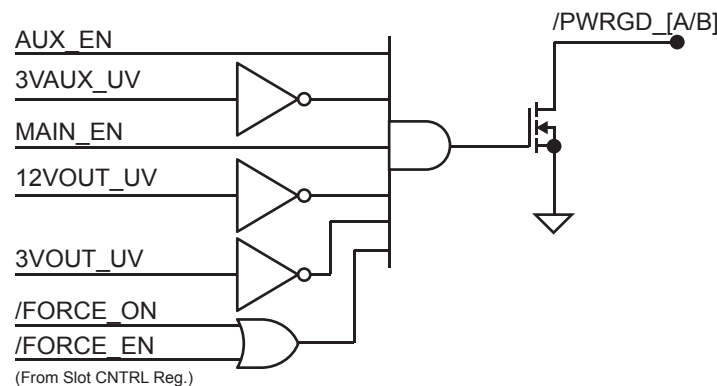


Figure 8. /PWRGD[A/B] Logic Diagram



overcurrent condition raise the junction temperature of one slot's controller and pass elements to 140°C, all of the outputs for that slot (including VAUX) will be shut off and the slot's /FAULT output will be asserted. The other slot's operating condition will remain unaffected. However, should the MIC2591B's die temperature exceed 160°C, both slots (all outputs, including VAUXA and VAUXB) will be shut off, whether or not a current limit condition exists. A 160°C overtemperature condition additionally sets the overtemperature bit (OT\_INT) in the Common Status Register.

### /PWRGD[A/B] Outputs

The MIC2591B has two /PWRGD outputs, one for each slot. These are open-drain, active-low outputs that require an external pull-up resistor to  $V_{STBY}$ . Each output is asserted when a slot has been enabled and has successfully begun delivering power to its respective +12V, +3.3V, and VAUX outputs. An equivalent logic diagram for /PWRGD[A/B] is shown in Figure 8.

### /FORCE\_ON[A/B] Inputs

These level-sensitive, active-low inputs are provided to facilitate designing systems using the MIC2591B. Asserting /FORCE\_ON[A/B] will turn on all three of the respective slot's outputs (+12V, +3.3V, and VAUX), while specifically defeating all protections for those outputs. This explicitly includes all overcurrent and short circuit protections, and on-chip thermal protection for the VAUX outputs. Additionally, asserting a slot's /FORCE\_ON[A/B] input will disable all of its input and output UVLO protections, with the sole exception of that asserting either or both of the /FORCE\_ON[A/B] inputs will not disable the VSTBY[A/B] input UVLO.

Asserting /FORCE\_ON[A/B] will cause the respective slot's /PWRGD[A/B] and /FAULT[A/B] outputs to enter their open-drain state. Additionally, there are two SMBus accessible register bits (see CNTRL[A/B] Register Bit D[2]), which can be set to disable the corresponding slot's /FORCE\_ON[A/B] pins. This allows system software to prevent these hardware overrides from being inadvertently activated during normal use. If not used, each pin should be connected to  $V_{STBY}$  using an external pull-up resistor. See Figure 6 for details.

### General Purpose Input (GPI) Pins

Two pins on the MIC2591B are available for use as GPI pins. The logic state of each of these pins can be determined by polling Bits [4:5] of Common Status Register. Both of these inputs are compliant to 3.3V. If unused, connect each GPI\_[A0/B0] pin to GND.

### A/D Converter

The MIC2591B has an internal 12-channel, 8-bit A/D converter that monitors the output voltage and current of each supply. This information is available via the System Management Interface. While the information is particularly intended for use by systems that support the IPMI 1.0 standard, it may be used for any other desired purpose. A 23.2kΩ external resistor must be connected from the IREF pin to ground to set the A/D Converter's Full-Scale current reference for the VAUX[A/B] internal MOSFETs.

### Hot-Plug Interface (HPI)

Once the input supplies are above their respective UVLO thresholds, the Hot-Plug Interface can be utilized for power control by enabling the control input pins (AUXEN[A/B] and ON[A/B]) for each slot. In order for the MIC2591B to switch on the VAUX supply for either slot, the AUXEN[A/B] control must be enabled after the power-on-reset delay,  $t_{POR}$  (typically, 250μs), has elapsed. The timing response diagram of Figure 9 illustrates a Hot-Plug Interface operation where an overcurrent fault is detected by the MIC2591B controller after initiating a power-up sequence. The MAIN (+12V & +3.3V) and VAUX[A/B] supply rails, /FAULT, /PWRGD and /INT output responses for both AUX and MAIN are shown in the figure.

### System Management Interface (SMI)

The MIC2591B's System Management Interface uses the Read\_Byte and Write\_Byte subset of the SMBus protocols to communicate with its host via the System Management Interface bus. The /INT output signals the controlling processor that one or more events need attention, if an interrupt-driven architecture is used. Note that the MIC2591B does not participate in the SMBus Alert Response Address (ARA) portion of the SMBus protocol.

### Fault Reporting and Interrupt Generation

#### SMI-only Control Applications

In applications where the MIC2591B is controlled only by the SMI, ON[A/B] and AUXEN[A/B] are connected to GND and the /FORCE\_ON[A/B] pins are connected to  $V_{STBY}$  as shown in Figure 6. In this case, the MIC2591B's /FAULT[A/B] outputs and STAT[A/B] Register Bit D[7] (FAULT[A/B]) are not activated as fault status is determined by polling STAT[A/B] Register Bits D[4], D[2], D[0] and CS (Common Status) Register Bits D[2:1]. Individual fault bits in STAT[A/B] and CS registers are asserted after power-on-reset when:

- Either or both CNTRL[A/B] Register Bits D[1:0] are asserted, AND
- 12VIN[A/B], 3VIN[A/B], or VSTBY[A/B] input voltage is lower than its respective ULVO threshold, OR
- The fast OC circuit breaker[A/B] has tripped, OR
- The slow OC circuit breaker[A/B] has tripped AND its filter timeout has expired, OR
- The slow OC circuit breaker[A/B] has tripped AND Slot[A/B] die temperature > 140°C, OR
- The MIC2591B's global die temperature > 160°C

To clear any one or all STAT[A/B] Register Bits D[4], D[2], D[0] and/or CS Register Bits D[2], D[1] once asserted, a software subroutine can perform an "echo reset" where a Logical "1" is written back to those register bit locations that have indicated a fault. This method of "echo reset" allows data to be retained in the STAT[A/B] and/or CS registers until such time as the system is prepared to operate on that data.

The MIC2591B can operate in interrupt mode or polled mode. For interrupt-mode operation, the open-drain, active-LOW /INT output signal is activated after power-on-reset if the INTMSK bit (CS Register Bit D[3]) has been reset to Logical "0". Once activated, the /INT output is asserted by any one

of the fault conditions listed above and deasserted when one or all STAT[A/B] Register Bits D[4], D[2], D[0] and/or CS Register Bits D[2], D[1] are reset upon the execution of an SMBus “echo reset” WRITE\_BYTE cycle. For polled-mode operation, the INTMSK bit should be set to Logical “1,” thereby inhibiting /INT output pin operation.

For those SMI-control applications where the /FORCE\_ON[A/B] inputs are needed for diagnostic purposes, the /FORCE\_ON[A/B] inputs must be enabled; that is, CNTRL[A/B] Register Bit D[2] should read Logical “0.” Once /FORCE\_ON[A/B] inputs are asserted, all output voltages are present with all circuit protection features disabled, including overtemperature protection on VAUX[A/B] outputs. To inhibit /FORCE\_ON[A/B] operation, a Logical “1” shall be written to the CNTRL[A/B] Register Bit D[2] location(s).

**HPI-only Control Applications**

In applications where the MIC2591B is controlled only by the HPI, SMBus signals SCL, SDA, and /INT signals are connected to V<sub>STBY</sub> as shown in Figure 6. In this configuration, the MIC2591B’s /FAULT[A/B] outputs are activated after power-on-reset and become asserted when:

Either or both external ON[A/B] and AUXEN[A/B] input signals

are asserted, AND


- 12VIN[A/B], 3VIN[A/B], or VSTBY[A/B] input voltage is lower than its respective ULVO threshold, OR
- The fast OC circuit breaker[A/B] has tripped, OR
- The slow OC circuit breaker[A/B] has tripped AND its filter timeout[A/B] has expired, OR
- The slow OC circuit breaker[A/B] has tripped AND Slot[A/B] die temperature > 140°C, OR
- The MIC2591B’s global die temperature > 160°C

In order to clear /FAULT[A/B] outputs once asserted, either or both ON[A/B] and AUXEN[A/B] input signals must be deasserted. Please see /FAULT[A/B] pin description for additional information.

If the /FORCE\_ON[A/B] inputs are used for diagnostic purposes, both /FAULT[A/B] and /PWRGD[A/B] outputs are deasserted once /FORCE\_ON[A/B] inputs are asserted.

**Serial Port Operation**

The MIC2591B uses standard SMBus Write\_Byte and Read\_Byte operations for communication with its host. The SMBus Write\_Byte operation involves sending the device’s

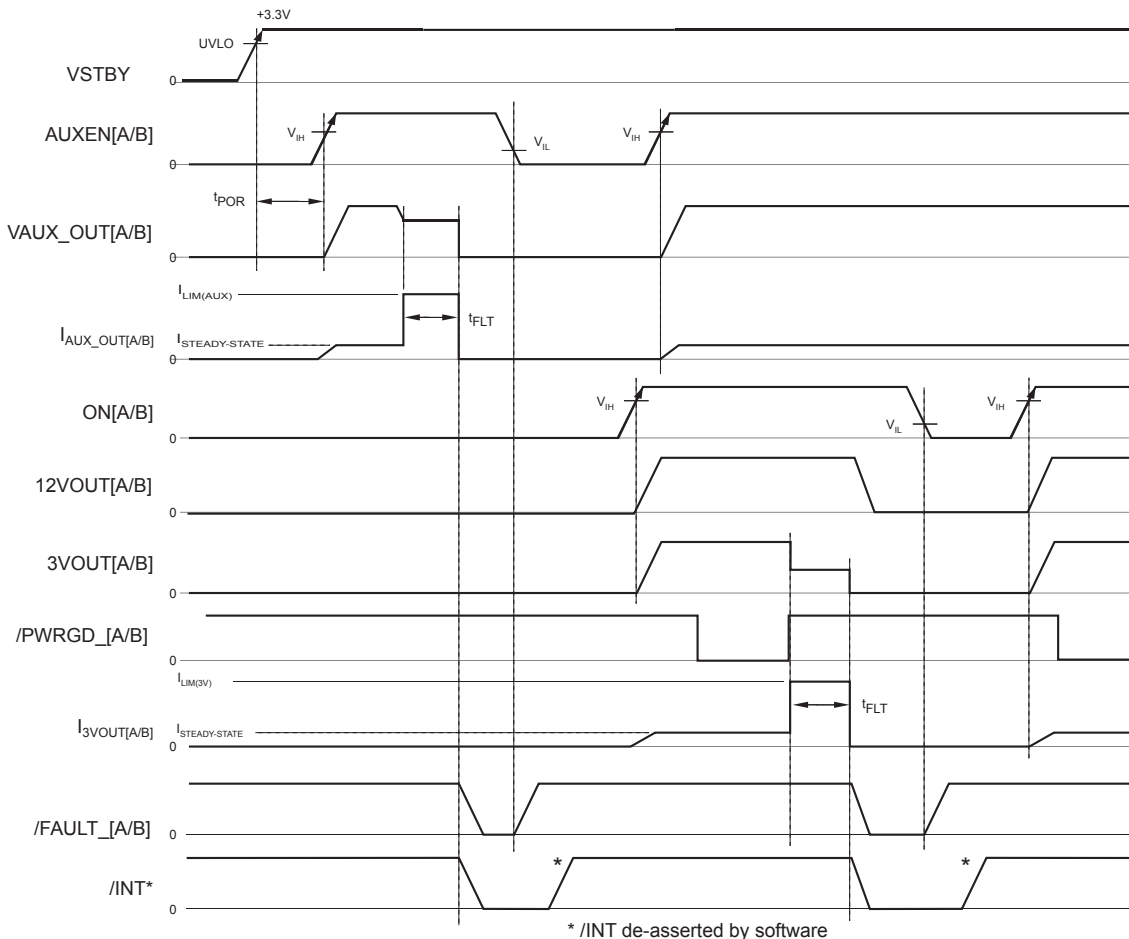


**Figure 9. Hot-Plug Interface Operation**

target address, with the R/W bit (LSB) set to the low (write) state, followed by a command byte and a data byte. The SMBus Read\_Byte operation is similar, but is a composite write and read operation: the host first sends the device's target address followed by the command byte, as in a write operation. A new "Start" bit must then be sent to the MIC2591B, followed by a repeat of the device address with the R/W bit set to the high (read) state. The data to be read from the part may then be clocked out. There is one exception to this rule: If the location latched in the pointer register from the last write operation is known to be correct (i.e., points to the desired register within the MIC2591B), then the "Receive\_Byte" procedure may be used. To perform a Receive\_Byte operation, the host sends an address byte to select the target MIC2591B, with the R/W bit set to the high (read) state, and then retrieves the data byte. Figures 10 through 12 show the formats for these data read and data write procedures.


The Command Register is eight bits (one byte) wide. This byte carries the address of the MIC2591B's register to be operated upon. The command byte values corresponding to the various MIC2591B register addresses are shown in Table 2. Command byte values other than 0000 0XXXb = 00h - 07h are reserved and should not be used.

**MIC2591B SMBus Address Configuration**


The MIC2591B responds to its own unique SMBus address, which is assigned using A2, A1, and A0. These represent the 3 LSBs of its 7-bit address, as shown in Table 3. These address bits are assigned only during power up of the VSTBY[A/B] supply input. These address bits allow up to eight MIC2591B devices in a single system. These pins are either grounded or left unconnected to specify a logical 0 or logical 1, respectively. A pin designated as a logical 1 may also be pulled up to V<sub>STBY</sub>.

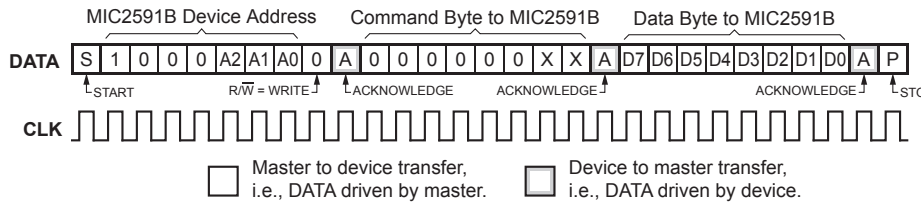

**Figure 10. WRITE\_BYTE Protocol**

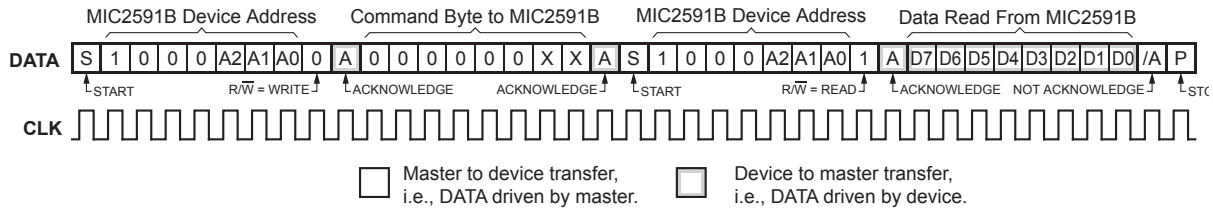

**Figure 11. READ\_BYTE Protocol**

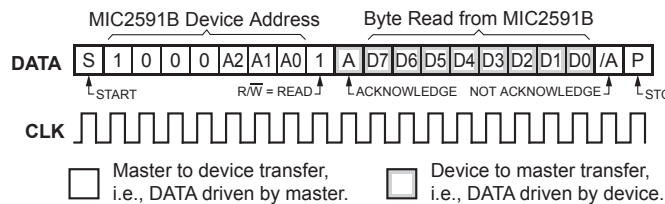

**Figure 12. RECEIVE\_BYTE Protocol**



**MIC2591B Register Set and Programmer's Model**

| Target Register |                                | Command Byte Value    |                       | Power-On Default       |
|-----------------|--------------------------------|-----------------------|-----------------------|------------------------|
| Label           | Description                    | Read                  | Write                 |                        |
| RESULT          | ADC Conversion Result Register | 00 <sub>h</sub>       | na                    | xx <sub>h</sub>        |
| ADC_CNTRL       | ADC Control Register           | 01 <sub>h</sub>       | 01 <sub>h</sub>       | 00 <sub>h</sub>        |
| CNTRLA          | Control Register Slot A        | 02 <sub>h</sub>       | 02 <sub>h</sub>       | 00 <sub>h</sub>        |
| CNTRLB          | Control Register Slot B        | 03 <sub>h</sub>       | 03 <sub>h</sub>       | 00 <sub>h</sub>        |
| STATA           | Slot A Status                  | 04 <sub>h</sub>       | 04 <sub>h</sub>       | 00 <sub>h</sub>        |
| STATB           | Slot B Status                  | 05 <sub>h</sub>       | 05 <sub>h</sub>       | 00 <sub>h</sub>        |
| CS              | Common Status Register         | 06 <sub>h</sub>       | 06 <sub>h</sub>       | xxxx 0000 <sub>b</sub> |
| Reserved        | Reserved / Do Not Use          | 07h - FF <sub>h</sub> | 07h - FF <sub>h</sub> | Undefined              |

**Table 2. MIC2591B Register Addresses**

| Inputs |    |    | MIC2591B Device Address  |                 |
|--------|----|----|--------------------------|-----------------|
| A2     | A1 | A0 | Binary                   | Hex             |
| 0      | 0  | 0  | 1000 000X <sub>b</sub> * | 80 <sub>h</sub> |
| 0      | 0  | 1  | 1000 001X <sub>b</sub>   | 82 <sub>h</sub> |
| 0      | 1  | 0  | 1000 010X <sub>b</sub>   | 84 <sub>h</sub> |
| 0      | 1  | 1  | 1000 011X <sub>b</sub>   | 86 <sub>h</sub> |
| 1      | 0  | 0  | 1000 100X <sub>b</sub>   | 88 <sub>h</sub> |
| 1      | 0  | 1  | 1000 101X <sub>b</sub>   | 8A <sub>h</sub> |
| 1      | 1  | 0  | 1000 110X <sub>b</sub>   | 8C <sub>h</sub> |
| 1      | 1  | 1  | 1000 111X <sub>b</sub>   | 8E <sub>h</sub> |

\* Where X = '1' for READ and '0' for WRITE

**Table 3. MIC2591B SMBus Addressing**

## Detailed Register Descriptions

### Converter Result Register (RESULT)

#### 8-Bits, Read-Only

| Conversion Result Register (RESULT) |                   |                   |                   |                   |                   |                   |                   |
|-------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| D[7]<br>read-only                   | D[6]<br>read-only | D[5]<br>read-only | D[4]<br>read-only | D[3]<br>read-only | D[2]<br>read-only | D[1]<br>read-only | D[0]<br>read-only |
| Voltage or Current Data from ADC    |                   |                   |                   |                   |                   |                   |                   |

| Bit    | Function               | Operation |
|--------|------------------------|-----------|
| D[7:0] | Measured data from ADC | read-only |

Power-Up Default Value:  $xxxx\ xxxx_b = xx_h$   
 Read Command Byte:  $0000\ 0000_b = 00_h$

### ADC Control Register (ADC\_CNTRL)

#### 8-Bits, Read/Write

| ADC Control Register (ADC_CNTRL) |                   |                   |                    |                    |                           |                    |                    |
|----------------------------------|-------------------|-------------------|--------------------|--------------------|---------------------------|--------------------|--------------------|
| D[7]<br>read-only                | D[6]<br>read-only | D[5]<br>read-only | D[4]<br>read/write | D[3]<br>read/write | D[2]<br>read/write        | D[1]<br>read/write | D[0]<br>read/write |
| BUSY                             | Reserved          | Reserved          | SEL                | PAR                | Supply Select<br>SUP[2:0] |                    |                    |

| Bit(s)   | Function                                 | Operation   |
|----------|--|---|
| BUSY     | ADC status                               | 0 = ADC quiescent, 1 = ADC busy   |
| D[6]     | Reserved                                 | Always read as zero   |
| D[5]     | Reserved                                 | Always read as zero   |
| SEL      | A/D Slot Select                          | Specifies slot for A/D conversion<br>0 = Slot A, 1 = Slot B   |
| PAR      | Parameter control bit for ADC conversion | 1 = Voltage, 0 = Current  |
| SUP[2:0] | Supply select for ADC conversion         | 000 = No conversion<br>001 = +3.3V supply<br>010 = Undefined - Do Not Use<br>011 = +12V supply<br>100 = Undefined - Do Not Use<br>101 = VAUX supply |

Power-Up Default Value:  $0000\ 0000_b = 00_h$   
 Command\_Byte Value (R/W):  $0000\ 0001_b = 01_h$

To operate the ADC, the ADC\_CNTRL register must be accessed with the following parameters:

- Selection of which slot will provide the parameter to be measured (Register Bit D[4])
- Choice of whether voltage or current is to be reported (Register Bit D[3])
- Selection of the which supply that is to be monitored (Register Bit D[2:0])

Note that this data may all be contained within one write to the ADC\_CNTRL register.

Software must then poll the BUSY bit (D[7]) until it is zero, or wait for a period of 100ms. At the end of that time, the RESULT register will contain the results of the conversion. After reading the RESULT register, a new conversion may be started.

**Control Register, Slot A (CNTRLA)****8-Bits, Read/Write**

| Control Register, Slot A (CNTRLA) |           |           |           |           |                    |            |            |
|-----------------------------------|-----------|-----------|-----------|-----------|--------------------|------------|------------|
| D[7]                              | D[6]      | D[5]      | D[4]      | D[3]      | D[2]               | D[1]       | D[0]       |
| read-only                         | read-only | read only | read only | read-only | read/write         | read/write | read/write |
| AUXAPG                            | MAINAPG   | Reserved  | Reserved  | Reserved  | /FORCE_A<br>ENABLE | MAINA      | VAUXA      |

| Bit(s)             | Function  | Operation   |
|--------------------|---|---|
| AUXAPG             | AUX output power-good status, Slot A                            | 1 = Power-is-Good<br>(VAUXA Output is above its UVLO<br>threshold)      |
| MAINAPG            | MAIN output power-good status, Slot A<br>thresholds)            | 1 = Power-is-Good<br>(MAINA Outputs are above their UVLO<br>thresholds) |
| D[5]               | Reserved  | Always read as zero   |
| D[4]               | Reserved  | Always read as zero   |
| D[3]               | Reserved  | Always read as zero   |
| /FORCE_A<br>ENABLE | Allows or inhibits the operation of the /FORCE_ONA<br>input pin | 0 = /FORCE_ONA is enabled<br>1 = /FORCE_ONA is disabled                 |
| MAINA              | MAIN enable control, Slot A                                     | 0 = Off, 1 = On   |
| VAUXA              | VAUX enable control, Slot A                                     | 0 = Off, 1 = On   |

Power-Up Default Value:                      0000 0000<sub>b</sub> = 00<sub>h</sub>  
 Read Command\_Byte Value (R/W):            0000 0010<sub>b</sub> = 02<sub>h</sub>

The power-up default value is 00<sub>h</sub>. Slot is disabled upon power-up, i.e., all supply outputs are off.

**Notes:**

1. The state of the /PWRGDA pin is the logical AND of the values of the AUXAPG and the MAINAPG bits, except when /FORCE\_ONA is asserted. If /FORCE\_ONA is asserted (the pin is pulled low), and /FORCE\_AENABLE is set to a logic zero, the /PWRGDA pin will be unconditionally forced to its open-drain ("Power Not Good") state.
2. The values of the MAINAPG and AUXAPG register bits are not affected by /FORCE\_ONA, but will instead continue to read as high if power is "Good," and as low if the conditions which indicate that power is good are not met.

**Control Register, Slot B (CNTRLB)****8-Bits, Read/Write**

| Control Register, Slot B (CNTRLB) |           |           |           |           |                    |            |            |
|-----------------------------------|-----------|-----------|-----------|-----------|--------------------|------------|------------|
| D[7]                              | D[6]      | D[5]      | D[4]      | D[3]      | D[2]               | D[1]       | D[0]       |
| read-only                         | read-only | read only | read only | read-only | read/write         | read/write | read/write |
| AUXBPG                            | MAINBPG   | Reserved  | Reserved  | Reserved  | /FORCE_B<br>ENABLE | MAINB      | VAUXB      |

| Bit(s)             | Function   | Operation  |
|--------------------|--|--|
| AUXBPG             | AUX output power-good status, Slot B                         | 1 = Power-is-Good<br>(VAUXB Output is above its UVLO threshold)      |
| MAINBPG            | MAIN output power-good status, Slot B                        | 1 = Power-is-Good<br>(MAINB Outputs are above their UVLO thresholds) |
| D[5]               | Reserved   | Always read as zero  |
| D[4]               | Reserved   | Always read as zero  |
| D[3]               | Reserved   | Always read as zero  |
| /FORCE_B<br>ENABLE | Allows or inhibits the operation of the /FORCE_ONB input pin | 0 = /FORCE_ONB is enabled<br>1 = /FORCE_ONB is disabled              |
| MAINB              | MAIN enable control, Slot B                                  | 0 = Off, 1 = On  |
| VAUXB              | VAUX enable control, Slot B                                  | 0 = Off, 1 = On  |

Power-Up Default Value:  $0000\ 0000_b = 00_h$   
 Command\_Byte Value (R/W):  $0000\ 0011_b = 03_h$

The power-up default value is  $00_h$ . Slot is disabled upon power-up, i.e., all supply outputs are off.

**Notes:**

1. The state of the /PWRGDB pin is the logical AND of the values of the AUXBPG and the MAINBPG bits, except when /FORCE\_ONB is asserted. If /FORCE\_ONB is asserted (the pin is pulled low), and /FORCE\_BENENABLE is set to a logic zero, the /PWRGDB pin will be unconditionally forced to its open-drain ("Power Not Good") state.
2. The values of the MAINBPG and AUXBPG register bits are not affected by /FORCE\_ONB, but will instead continue to read as high if power is "Good," and as low if the conditions which indicate that power is good are not met.

**Status Register Slot A (STATA)****8-Bits, Read-Only**

| Status Register, Slot A (STATA) |           |           |            |           |            |           |            |
|---------------------------------|-----------|-----------|------------|-----------|------------|-----------|------------|
| D[7]                            | D[6]      | D[5]      | D[4]       | D[3]      | D[2]       | D[1]      | D[0]       |
| read-only                       | read-only | read-only | read/write | read-only | read/write | read-only | read/write |
| FAULTA                          | MAINA     | VAUXA     | VAUXAF     | Reserved  | 12VAF      | Reserved  | 3VAF       |

| Bit(s) | Function   | Operation   |
|--------|--|---|
| FAULTA | FAULT Status - Slot A  | 1 = Fault pin asserted (/FAULTA pin is LOW)<br>0 = Fault pin deasserted (/FAULTA pin is HIGH)<br>See Notes 1, 2, and 3. |
| MAINA  | MAIN Enable Status - Slot A<br>two Main Power outputs for Slot A | Represents the actual state (on/off) of the<br>(+12V and +3.3V)<br>1 = Main Power ON<br>0 = Main Power OFF              |
| VAUXA  | VAUX Enable Status - Slot A<br>Auxiliary Power output for Slot A | Represents the actual state (on/off) of the<br><br>1 = AUX Power ON<br>0 = AUX Power OFF                                |
| VAUXAF | Overcurrent Fault: VAUXA supply                                  | 1 = Fault 0 = No fault  |
| D[3]   | Reserved   | Always read as zero   |
| 12VAF  | Overcurrent Fault: +12V supply                                   | 1 = Fault 0 = No fault  |
| D[1]   | Reserved   | Always read as zero   |
| 3VAF   | Overcurrent Fault: 3.3V supply                                   | 1 = Fault 0 = No fault  |

Power-Up Default Value:                           0000 0000<sub>b</sub> = 00<sub>h</sub>  
 Command\_Byte Value (R/W):                      0000 0100<sub>b</sub> = 04<sub>h</sub>

The power-up default value is 00<sub>h</sub>. Both slots are disabled upon power-up, i.e., all supply outputs are off. In response to an overcurrent fault condition, writing a logical 1 back into the active (or set) bit position will clear the bit and deassert /INT. The status of the /FAULTA pin is not affected by reading the Status Register or by clearing active status bits.

**Notes:**

1. If FAULTA has been set by an overcurrent condition on one or more of the MAIN outputs, the ONA input must go LOW to reset FAULTA.  
If FAULTA has been set by a VAUXA overcurrent event, the AUXENA input must go LOW to reset FAULTA.  
If an overcurrent has occurred on both a MAIN output and the VAUX output of slot A, both ONA and AUXENA of the slot must go low to reset FAULTA.
2. Neither the FAULTA bits nor the /FAULTA pins are active when the MIC2591B power paths are controlled by the System Management Interface. When using SMI power path control, AUXENA and ONA pins for that slot must be tied to GND.
3. If /FORCE\_ONA is asserted (low), the /FAULTA pin will be unconditionally forced to its open-drain state. Note, though, that the value in the FAULTA register bit is not affected by /FORCE\_ONA, but will instead continue to read as a high if no faults are present on Slot A, and as a low if any fault conditions exist which would disable Slot A if /FORCE\_ONA was not asserted.

**Status Register Slot B (STATB)****8-Bits, Read-Only**

| Status Register, Slot B (STATB) |           |           |            |           |            |           |            |
|---------------------------------|-----------|-----------|------------|-----------|------------|-----------|------------|
| D[7]                            | D[6]      | D[5]      | D[4]       | D[3]      | D[2]       | D[1]      | D[0]       |
| read-only                       | read-only | read-only | read/write | read-only | read/write | read-only | read/write |
| FAULTB                          | MAINB     | VAUXB     | VAUXBF     | Reserved  | 12VBF      | Reserved  | 3VBF       |

| Bit(s) | Function                        | Operation  |
|--------|---------------------------------|--|
| FAULTB | FAULT Pin Status - Slot B       | 1 = Fault pin asserted (/FAULTB pin is LOW)<br>0 = Fault pin deasserted (/FAULTB pin is HIGH)<br>See Notes 1, 2, and 3.                    |
| MAINB  | MAIN Enable Status - Slot B     | Represents the actual state (on/off) of the four Main Power outputs for Slot B (+12V and +3.3V)<br>1 = MAIN Power ON<br>0 = MAIN Power OFF |
| VAUXB  | VAUX Enable Status - Slot B     | Represents the actual state (on/off) of the Auxiliary Power output for Slot B<br>1 = AUX Power ON<br>0 = AUX Power OFF                     |
| VAUXBF | Overcurrent Fault: VAUXB supply | 1 = Fault 0 = No fault   |
| D[3]   | Reserved                        | Always read as zero  |
| 12VBF  | Overcurrent Fault: +12V supply  | 1 = Fault 0 = No fault   |
| D[1]   | Reserved                        | Always read as zero  |
| 3VBF   | Overcurrent Fault: 3.3V supply  | 1 = Fault 0 = No fault   |

Power-Up Default Value: 0000 0000<sub>b</sub> = 00<sub>h</sub>  
 Command\_Byte Value (R/W): 0000 0101<sub>b</sub> = 05<sub>h</sub>

The power-up default value is 00<sub>h</sub>. Both slots are disabled upon power-up, i.e., all supply outputs are off. In response to an overcurrent fault condition, writing a logical 1 back into the active (or set) bit position will clear the bit and deassert /INT. The status of the /FAULTB pin is not affected by reading the Status Register or by clearing active status bits.

**Notes:**

1. If FAULTB has been set by an overcurrent condition on one or more of the MAIN outputs, the ONB input must go LOW to reset FAULTB. If FAULTB has been set by a VAUXB overcurrent event, the AUXENB input must go LOW to reset FAULTB. If an overcurrent has occurred on both a MAIN output and the VAUX output of slot B, both ONB and AUXENB of the slot must go low to reset FAULTB.
2. Neither the FAULTB bits nor the /FAULTB pins are active when the MIC2591B power paths are controlled by the System Management Interface. When using SMI power path control, the AUXENB and ONB pins for that slot must be tied to GND.
3. If /FORCE\_ONB is asserted (low), the /FAULTB pin will be unconditionally forced to its open-drain state. Note, though, that the value in the FAULTB register bit is not affected by /FORCE\_ONB, but will instead continue to read as a high if no faults are present on Slot B, and as a low if any fault conditions exist which would disable Slot B if /FORCE\_ONB was not asserted.

**Common Status Register (CS)****8-Bits, Read/Write**

| Common Status Register (CS) |            |           |           |            |            |            |           |
|-----------------------------|------------|-----------|-----------|------------|------------|------------|-----------|
| D[7]                        | D[6]       | D[5]      | D[4]      | D[3]       | D[2]       | D[1]       | D[0]      |
| read-write                  | read-write | read-only | read-only | read-write | read-write | read-write | read-only |
| Reserved                    | Reserved   | GPI_B0    | GPI_A0    | INTMSK     | UV_INT     | OT_INT     | Reserved  |

| Bit(s) | Function                        | Operation   |
|--------|---------------------------------|---|
| D[7]   | Reserved                        | Always read as zero   |
| D[6]   | Reserved                        | Always read as zero   |
| GPI_B0 | General Purpose Input 0, Slot B | State of GPI_B0 pin   |
| GPI_A0 | General Purpose Input 0, Slot A | State of GPI_A0 pin   |
| INTMSK | Interrupt Mask                  | 0 = /INT generation is enabled<br>1 = /INT generation is disabled. The MIC2591B does not participate in the SMBus Alert Response Address (ARA) protocol   |
| UV_INT | Undervoltage Interrupt          | 0 = No UVLO fault<br>1 = UVLO fault<br>Set whenever a circuit breaker fault condition occurs as a result of an undervoltage lockout condition on one of the main supply inputs. This bit is only set if a UVLO condition occurs while the ON[A/B] pin is asserted or the MAIN[A/B] control bits are set |
| OT_INT | Overtemperature Interrupt       | 0 = Die Temp < 160°C.<br>1 = Fault: Die Temp > 160°C.<br>Set if a fault occurs as a result of the MIC2591B's die temperature exceeding 160°C  |
| D[0]   | Reserved                        | Undefined   |

Power-Up Default Value: 00000000<sub>b</sub> = 00<sub>h</sub>  
 Command\_Byte Value (R/W): 00000110<sub>b</sub> = 06<sub>h</sub>

To reset the OT\_INT and UV\_INT fault bits, a logical 1 must be written back to these bits.



## Applications Information

### Sense Resistor Selection

The 12V and the 3.3V supplies employ internal current sensing circuitry to detect overcurrent conditions that may trip the circuit breaker. An external sense resistor is used to monitor the current that passes through the external MOSFET for each slot of the 12V and 3.3V rails. The sense resistor is nominally valued at:

$$R_{\text{SENSE(NOM)}} = \frac{V_{\text{THLIMIT}}}{I_{\text{LIMIT}}}$$

where  $V_{\text{THLIMIT}}$  is the typical (or nominal) circuit breaker threshold voltage (50mV) and  $I_{\text{LIMIT}}$  is the nominal inrush load current level to trip the internal circuit breaker.

To accommodate worst-case tolerances in the sense resistor (for a  $\pm 1\%$  initial tolerance, allow  $\pm 3\%$  tolerance for variations over time and temperature) and circuit breaker threshold voltages, a slightly more detailed calculation must be used to determine the minimum and maximum hot swap load currents.

As the MIC2591B's minimum current limit threshold voltage is 45mV, the minimum hot swap load current is determined where the sense resistor is 3% high:

$$I_{\text{LIMIT(MIN)}} = \frac{45\text{mV}}{(1.03 \times R_{\text{SENSE(NOM)}})} = \frac{43.7\text{mV}}{R_{\text{SENSE(NOM)}}$$

Keep in mind that the minimum hot swap load current should be greater than the application circuit's upper steady-state load current boundary. Once the lower value of  $R_{\text{SENSE}}$  has been calculated, it is good practice to check the maximum hot swap load current ( $I_{\text{LIMIT(MAX)}}$ ) which the circuit may let pass in the case of tolerance build-up in the opposite direction. Here, the worst-case maximum is found using a  $V_{\text{THLIMIT(MAX)}}$  threshold of 55mV and a sense resistor 3% low in value:

$$I_{\text{LIMIT(MAX)}} = \frac{55\text{mV}}{(0.97 \times R_{\text{SENSE(NOM)}})} = \frac{56.7\text{mV}}{R_{\text{SENSE(NOM)}}$$

In this case, the application circuits must be sturdy enough to operate up to approximately 1.25x the steady-state hot swap load currents. For example, if one of the 12V slots of the MIC2591B circuit must pass a minimum hot swap load current of 1.5A without nuisance trips,  $R_{\text{SENSE}}$  should be set to:

$$R_{\text{SENSE(NOM)}} = \frac{45\text{mV}}{1.5\text{A}} = 30\text{m}\Omega$$

where the nearest 1% standard value is 30.1m $\Omega$ . At the other tolerance extremes,  $I_{\text{LIMIT(MAX)}}$  for the circuit in question is then simply:

$$I_{\text{LIMIT(MAX)}} = \frac{56.7\text{mV}}{30.1\text{m}\Omega} = 1.88\text{A}$$

With a knowledge of the application circuit's maximum hot swap load current, the power dissipation rating of the sense resistor can be determined using  $P = I^2R$ . Here, the current is  $I_{\text{LIMIT(MAX)}} = 1.88\text{A}$  and the resistance  $R_{\text{SENSE(MAX)}} = (1.03)(R_{\text{SENSE(NOM)}}) = 31.00\text{m}\Omega$ . Thus, the sense resistor's maximum power dissipation is:

$$P_{\text{MAX}} = (1.88\text{A})^2 \times (31.00\text{m}\Omega) = 0.110\text{W}$$

A 0.25W sense resistor is a good choice in this application.

### PCB Layout Suggestions and Hints

#### 4-Wire Kelvin Sensing

Because of the low value required for the sense resistor, special care must be used to accurately measure the voltage drop across it. Specifically, the measurement technique across  $R_{\text{SENSE}}$  must employ 4-wire Kelvin sensing. This is simply a means of ensuring that any voltage drops in the power traces connected to the resistors are not picked up by the signal conductors measuring the voltages across the sense resistors.



Figure 13 illustrates how to implement 4-wire Kelvin sensing. As the figure shows, all the high current in the circuit (from  $V_{\text{IN}}$  through  $R_{\text{SENSE}}$  and then to the drain of the N-channel power MOSFET) flows directly through the power PCB traces and through  $R_{\text{SENSE}}$ . The voltage drop across  $R_{\text{SENSE}}$  is sampled in such a way that the high currents through the power traces will not introduce significant parasitic voltage drops in the sense leads. It is recommended to connect the hot swap controller's sense leads directly to the sense resistor's metalized contact pads. The Kelvin sense signal traces should be symmetrical with equal length and width, kept as short as possible, and isolated from any noisy signals and planes.


Additionally, for designs that implement Kelvin sense connections that exceed 1" in length and/or if the Kelvin (signal) traces are vulnerable to noise possibly being injected onto these signals, the example circuit shown in Figure 14 can be implemented to combat noisy environments. This circuit implements a 1.6 MHz low-pass filter to attenuate higher frequency disturbances on the current sensing circuitry. However, individual system analysis should be used to determine if filtering is necessary and to select the appropriate cutoff frequency for each specific application.

#### Other Layout Considerations

Figure 15 is a suggested PCB layout diagram for the MIC2591B power traces, Kelvin sense connections, and capacitor components. In this illustration, only the 12V Slot B is shown but a similar approach is suggested for both slots of each Main power rail (12V and 3.3V). Many hot swap applications will require load currents of several amperes. Therefore, the power (12VIN and Return, 3VIN and Return) trace widths (W) need to be wide enough to allow the current to flow while the rise in temperature for a given copper plate (e.g., 1oz. or 2oz.) is kept to a maximum of 10°C to 25°C. The return (or power ground) trace should be the same width as the positive voltage power traces (input/load) and isolated from any ground and signal planes so that the controller's power is common mode. Also, these traces should be as short as possible in order to minimize the IR drops between the input and the load. As indicated in the Pin Description section, an external connection must be made that ties together both channel inputs ((+) Kelvin sense) of each Main power rail (i.e., 3VINA and 3VINB, 12VINA and 12VINB must be externally connected). These connections should be implemented directly at the chip. Insure that the voltage drop between the two(+) Kelvin sense inputs for each rail is no greater than 0.2mV by using a common power path

or plane, for the two inputs (e.g., 12VINA, 12VINB). Finally, the use of plated-through vias will be necessary to make circuit connection to the power, ground, and signal planes on multi-layer PCBs.

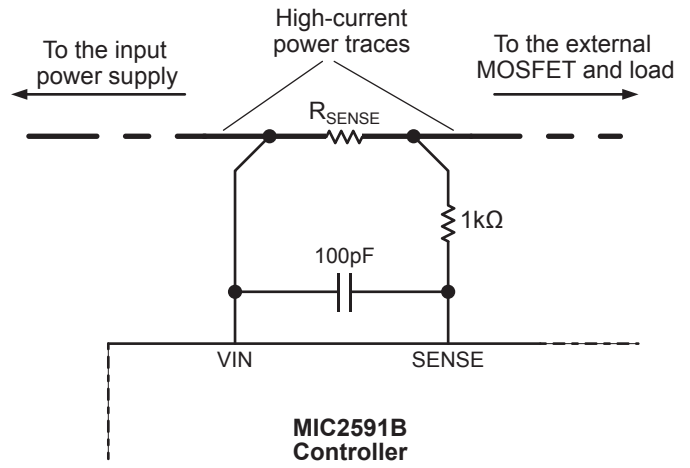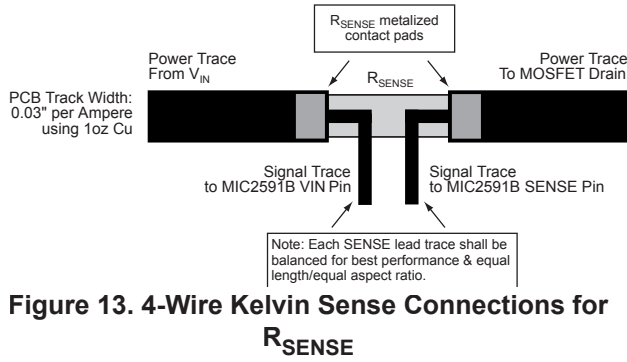

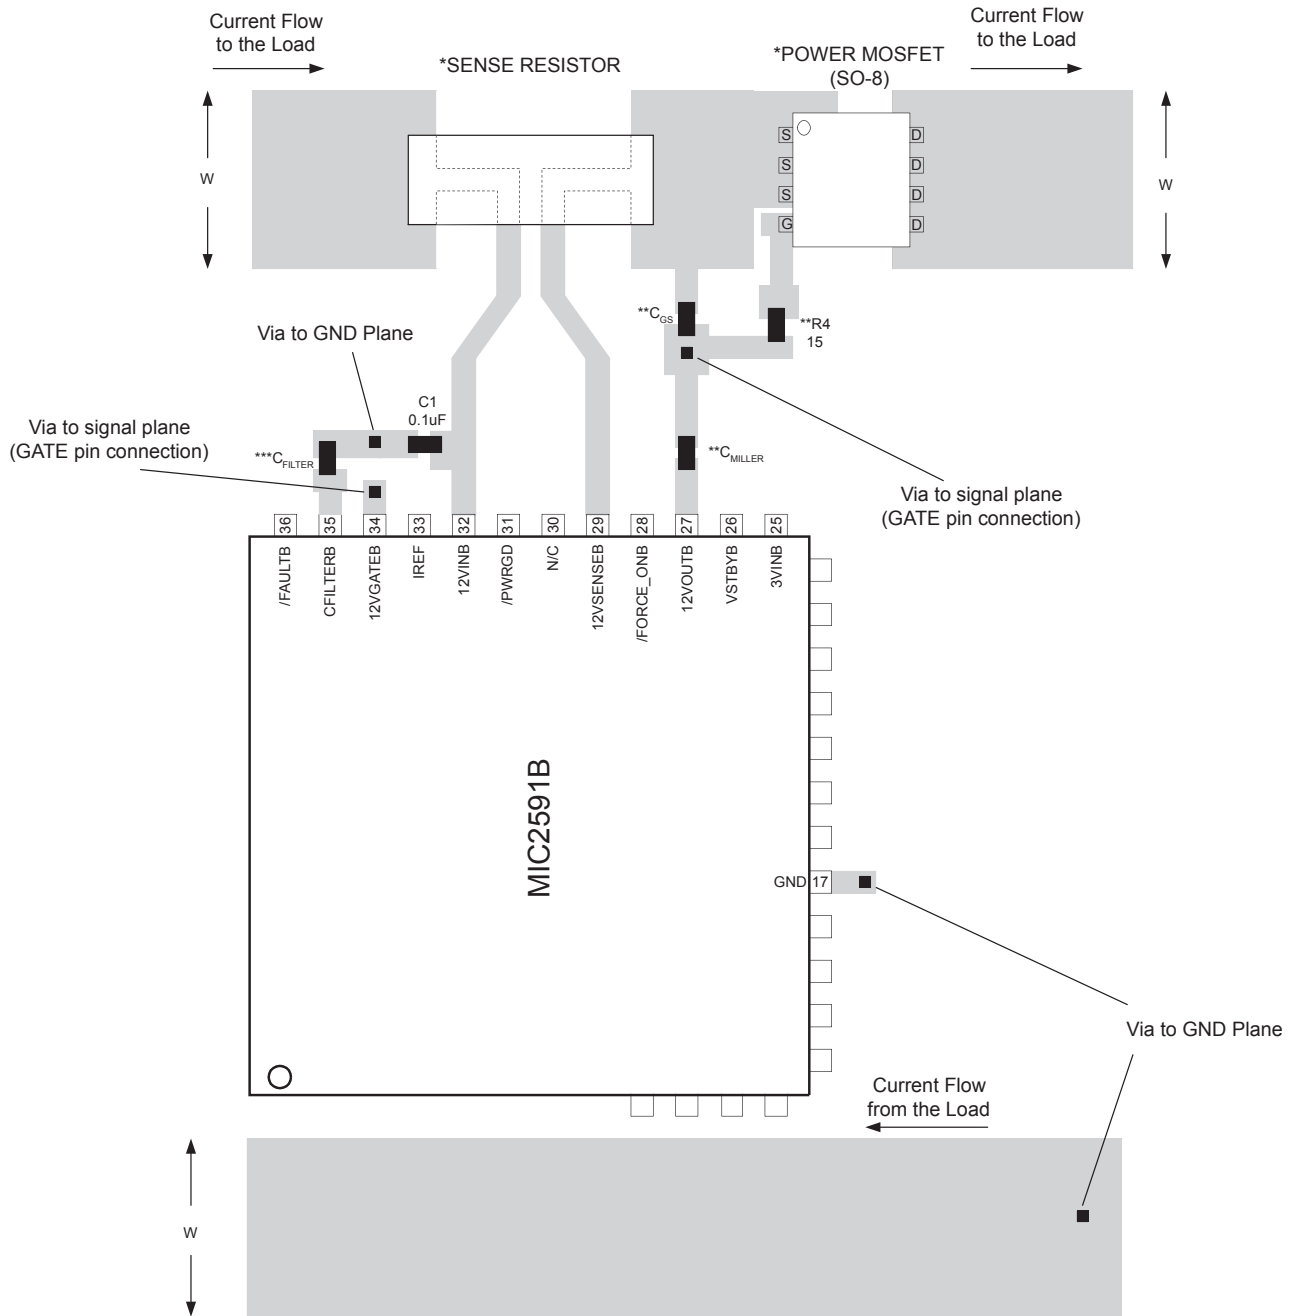

- DRAWING IS NOT TO SCALE AND NOT ALL PINS SHOWN FOR CLARITY-  
 \*See Table 4 for part numbers and vendors  
 \*\*Optional components  
 \*\*\*Recommended components (variable in value, see Functional Description and Applications Information)  
 Trace width (W) guidelines given in "PCB Layout Recommendations" section of the datasheet  
 12V(Slot B) is illustrated in this example. A similar layout is suggested for the 3V supply and both slots

Figure 15. Suggested PCB Layout for Sense Resistor, Power MOSFET, and Capacitors

### MOSFET and Sense Resistor Vendors


Device types, part numbers, and manufacturer contact information for power MOSFETs and sense resistors are provided in Table 4. Some of the recommended MOSFETs include a metal (tab) heat sink on the bottom side of the package. Contact the device manufacturer for package information.

| MOSFET Vendors          | Key Power MOSFET Type(s) |                 | Package       | Contact Information                 |
|-------------------------|--------------------------|-----------------|---------------|-------------------------------------|
|                         | N-Channel                | P-Channel       |               |                                     |
| Vishay - Siliconix      | Si4420DY                 | Si4435BDY       | SO-8          | www.siliconix.com<br>(203) 452-5664 |
|                         | Si4442DY                 | Si4427BDY       | SO-8          |                                     |
|                         | Si3442DV                 | Si4405DY        | SO-8          |                                     |
|                         | Si4410DY                 | Si4425BDY       | SO-8          |                                     |
|                         | Si7860ADP                | Si7483ADP       | PowerPAK SO-8 |                                     |
|                         | Si7344DP                 | Si7491DP        | PowerPAK SO-8 |                                     |
|                         | Si7844DP (Dual)          | Si7945DP (Dual) | PowerPAK SO-8 |                                     |
|                         | Si7114DN                 | Si7423DN        | 1212 SO-8     |                                     |
|                         | Si7806ADN                | Si7421DN        | 1212 SO-8     |                                     |
| International Rectifier | IRF7882                  | IRF7424         | SO-8          | www.irf.com<br>(310) 322-3331       |
|                         | IRF7413                  | IRF7416         | SO-8          |                                     |
|                         | IRF7313 (Dual)           | IRF7328 (Dual)  | SO-8          |                                     |

| Resistor Vendors | Sense Resistors  | Contact Information   |
|------------------|--|---|
| Vishay - Dale    | "WSL" and "WSR" Series                                 | www.vishay.com/docswsl_30100.pdf<br>(203) 452-5664                                    |
| IRC              | "OARS" Series<br>"LR" Series<br>second source to "WSL" | www.irctt.com/pdf_files/OARS.pdf<br>www.irctt.com/pdf_files/LRC.pdf<br>(828) 264-8861 |

**Table 4. MOSFET and Sense Resistor Vendors**

Package Information

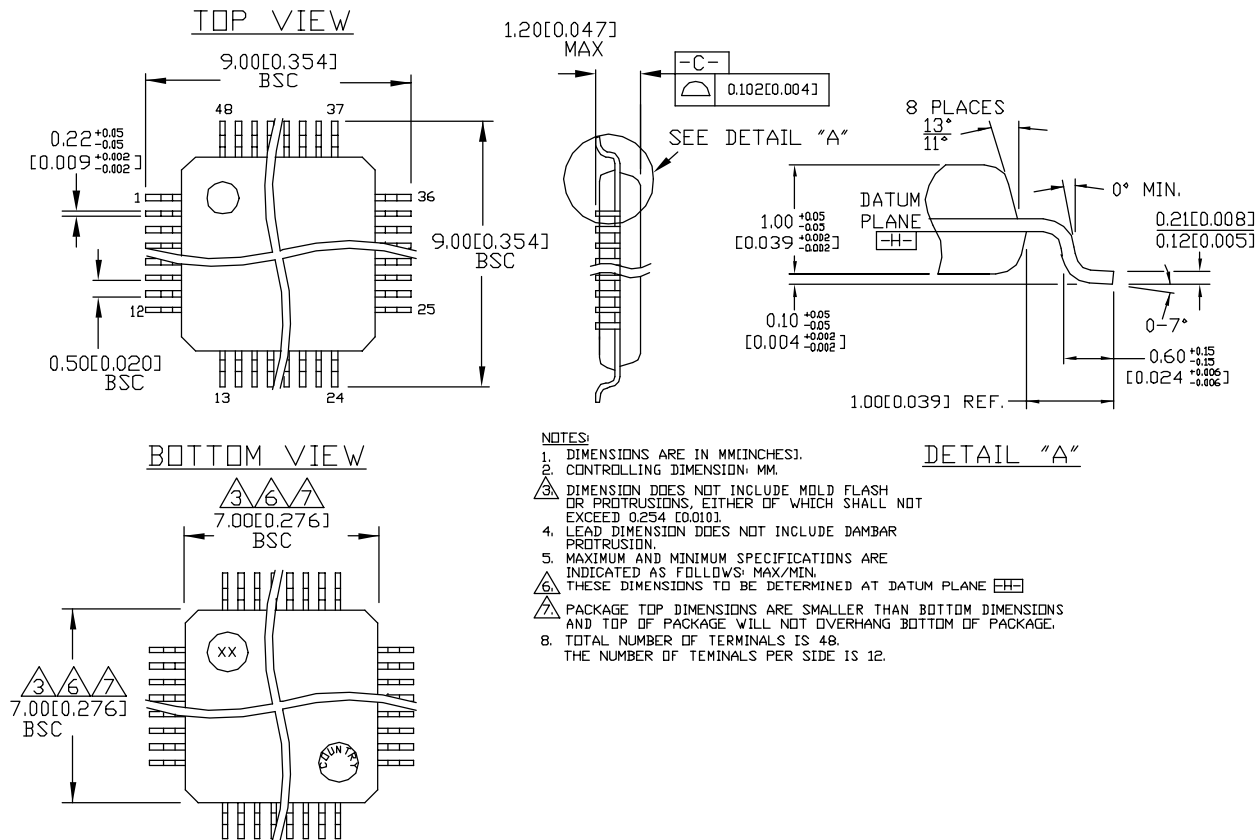

48-Pin TQFP

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA  
 TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2005 Micrel, Incorporated.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.