

μCom-10Gb +

Harsh Environment 10Gb
Ethernet Micro Connectors



μCom-Series is a new range of connectors designed to address the latest trends of the industry : **miniaturization** and **high speed**, with the highest resistance for use in the **harshest environments**.

μCom-10Gb + is the first product of this new range.

KEY CHARACTERISTICS

- 10Gb+ exceeds 10Gb/s Ethernet following IEEE 802.3an-2006 : **10GBase-T**
- Environmental testing based on **MIL-DTL-38999 series III** military specifications
- Miniature : **15 mm(.59") max** external diameter

FEATURES AND BENEFITS

- 4 pairs totally insulated throughout the connector
 - ➔ minimum cross-talk between the four pairs
- Patent pending special interfacial shapes
 - ➔ minimum perturbation at the interface of each pair
- Thread coupling mechanism
 - ➔ 2000 mating cycles & high vibration resistance
- Machined Brass shells and RoHS compliant plating
 - ➔ shell to shell continuity and 500h salt Spray resistance
- Machined & gold plated Solder and Crimp contacts
 - ➔ design & performance according to the innercontact of M39029/77-429#16 M39029/76-425#16 38999 contact
- Solder contact : max AWG24
- Crimp contact : AWG 24 to 26
- IP68 sealing mated and unmated for receptacles
- 1500 Vrms Dielectric Withstanding voltage
- Temperature range : - 55°C / + 125°C


APPLICATIONS

- **DEFENSE** : C4ISR, Battlefield Communications, Shipboard, Ground Vehicles Vetronics.
- **AERONAUTICAL** : In Flight Entertainment, Avionics, Communication Systems.
- **RAIL MASS TRANSIT** : Passenger Information Systems, Communication Systems.




TRANSMISSION DATA


Insertion Loss

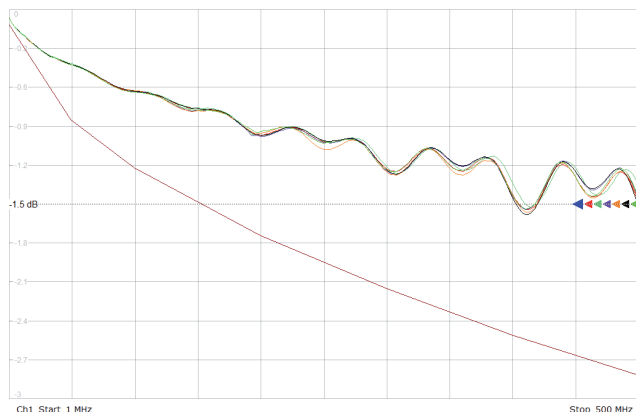


Next 1-2

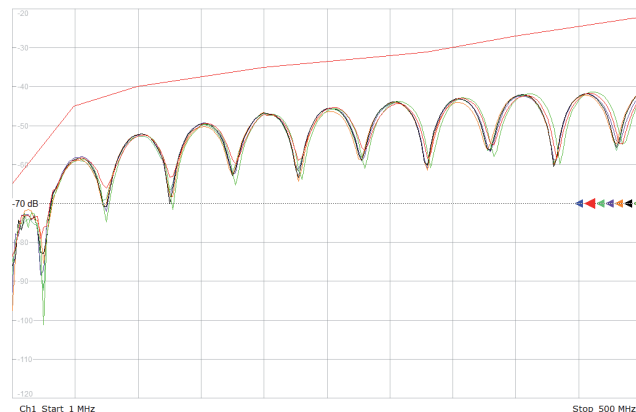

Return Loss


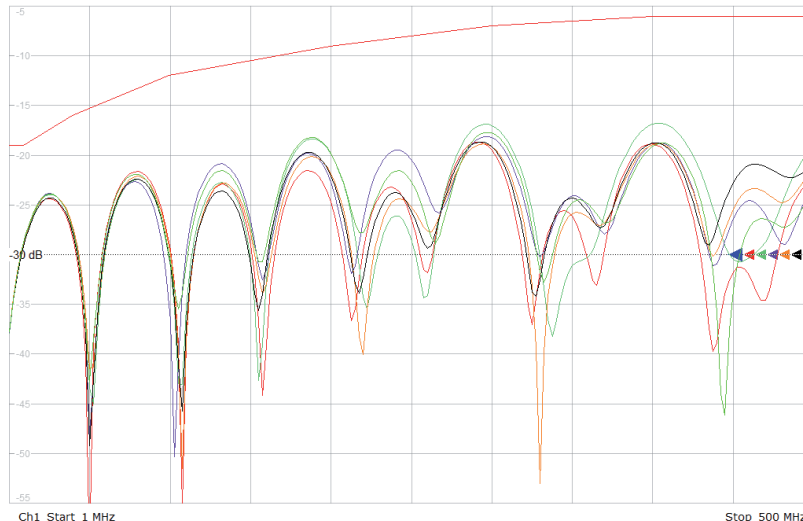


RECEPTACLE

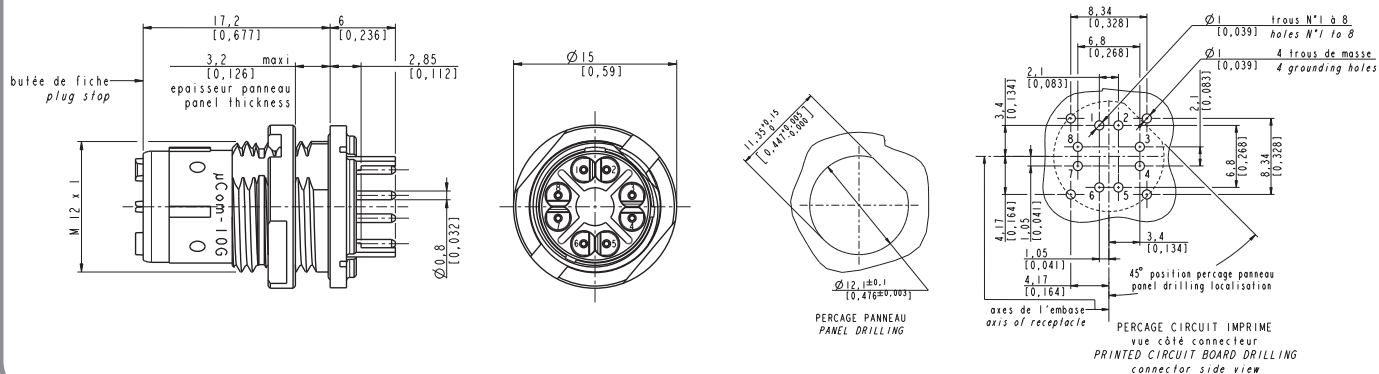


PLUGS & CORDSETS


Plug with Gland Backshell

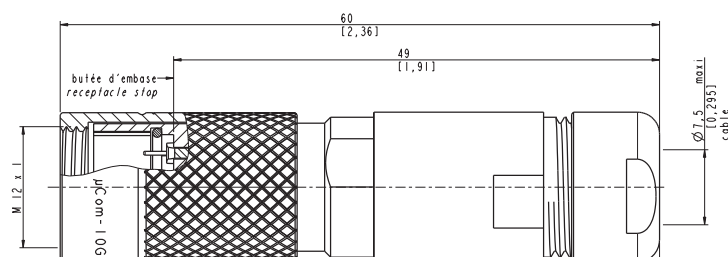

Plug with Band Backshell

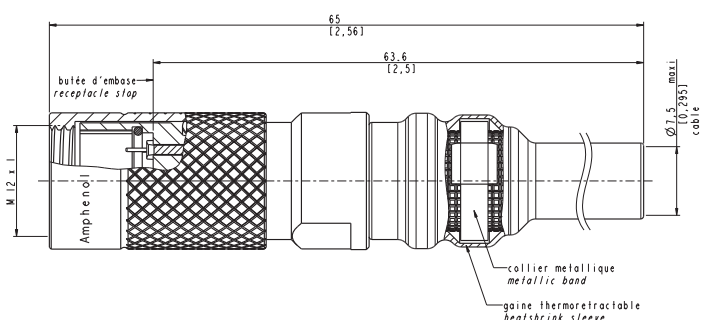

Plug - Plug Cordsets

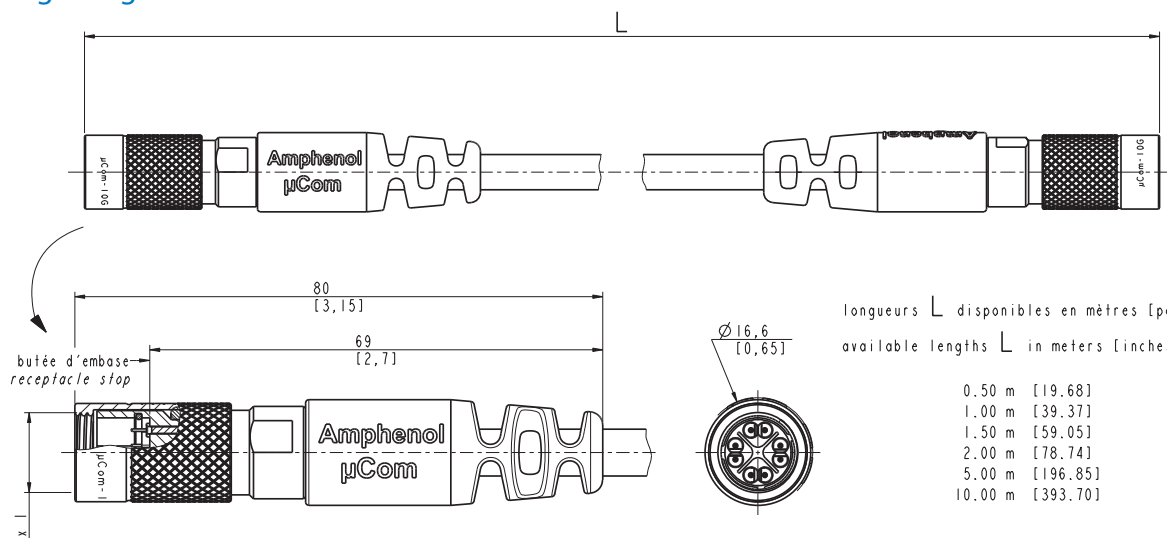

longueurs L disponibles en mètres [pouces]:

available lengths L in meters [inches]:

0.50 m	[19.68]
1.00 m	[39.37]
1.50 m	[59.05]
2.00 m	[78.74]
5.00 m	[196.85]
10.00 m	[393.70]

Type of Cable used : CAT 7 HFFR
According to EN 50288-4-2




- Stranded bare copper wire (26 AWG)
- 4 Screened twisted pairs: 2 wires twisted to a pair, Alulminate foil overlapped
- Shield braiding of tinned copper wires, about 80% coverage
- Strain member of Kevlar

- Jacket in black Polyurethane (PUR), glossy finish, acc to DIN VDE 0282
- External diameter 7.0 +/-0.3 mm
- UV & Hydrolysis resistant, Halogen free, RoHS compliant
- Max Pull force: 800 N, Weight : about 54 kg/km
- Temperature : - 40°C / + 85°C


For full dimensions, please ask for Customer Drawing

IN LINE RECEPTACLES

In line receptacle with Gland Backshell

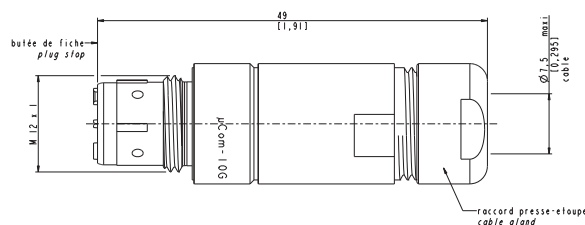


In line receptacle with Band Backshell

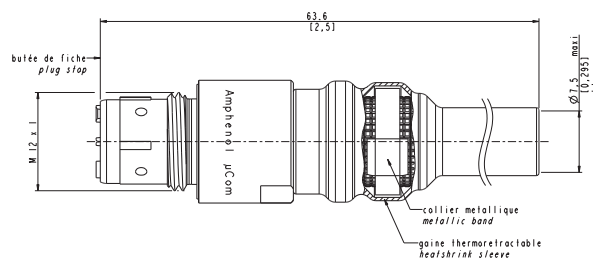

TOOLS AND ACCESSORIES

Receptacle Caps

Neoprene Version P/N : 31091

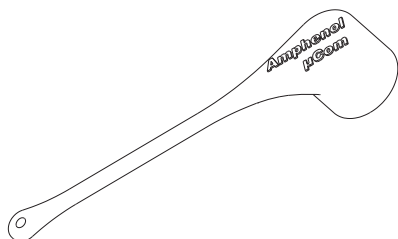


Nota : plan a type M3 hole on the panel

Metal Version P/N : 31057




Plug Caps

Neoprene Version P/N : 31092

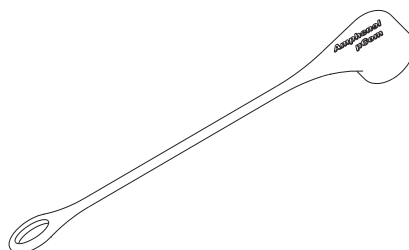

Receptacle Nut Clamping tool
P/N : 31055



Crimp Contact insertion tool

P/N : 31056



Contact positioner

For M22520/2-01 crimping tool

P/N : 31095



HOW TO ORDER

Receptacles

μCom-10G+ RPB
Shell
R Receptacle (push-pull or thread)
Contacts Termination
P PCB
S Solder
Shell Plating
B Black Nickel
G Olive drab Cadmium
U Unplated Brass

Plugs & In Line Receptacles

μCom-10G+ PTCBBA
Shell
L In Line Receptacle
P Plug
Mating (for plugs only)
T Thread
Contacts Termination
C Crimp
S Solder
Shell Plating
B Black Nickel
G Olive drab Cadmium
U Unplated Brass
Backshell Type
G Gland
B Band
Cable Diameter (For Gland Backshell Only)
A: for cable diam 7,5 mm
B: TBD

Plugs-Plugs Cordsets with Cat7 HFFR Cable, Outdoor PUR jacket

μCom-10G+ CTCB015
Shell
C Plug - Plug Cordset
F Plug Cordset-open
Mating (for plugs only)
T Thread
Contacts Termination
C Crimp
S Solder
Shell Plating
B Black Nickel
G Olive drab Cadmium
U Unplated Brass
Total Length
005 : 50 cm [19,68]
010 : 1,0 m [39,37]
015 : 1,5 m [59,05]
020 : 2,0 m [78,74]
050 : 5,0 m [196,85]
100 : 10,0 m [393,70]



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.