

San Ace 60L ^{9CRLA type}

High Static Pressure Long Life Counter Rotating Fan

Features

High Static Pressure

This fan delivers a maximum airflow of 2.1 m³/min and maximum static pressure of 1,400 Pa.

The maximum static pressure has increased by approximately 40% compared with our current model.*

Long Service Life

With an expected life of 100,000 hours (about 11 years) of continuous operation, this fan contributes to longer maintenance-free operating periods for devices.

High Energy Efficiency and Low Noise

The PWM control function enables the external control of fan speed, contributing to lowering noise and improving energy efficiency of devices.

* The San Ace 60L 9CRL type 60 × 60 × 76 mm Long Life Counter Rotating Fan (model no.: 9CRL0612P0G001).



60×60×76 mm



Specifications

The models listed below **have pulse sensors with PWM control function.**

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹] Inlet Outlet	Max. airflow [m ³ /min] [CFM]	Max. static pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating temperature [°C]	Expected life [h]
9CRLA0612P0G001	12	10.8 to 13.2	100	3.0	36.0	16500 17800	2.1 74.1	1400 5.62	70	-20 to +70	100000/60°C
			20	0.4	4.8	5000 5400	0.64 22.6	128 0.51	43		
9CRLA0612P0G003			100	3.0	36.0	16500 17800	2.1 74.1	1400 5.62	70		
			20	0.4	4.8	5000 5400	0.64 22.6	128 0.51	43		

* PWM frequency: 25 kHz. Fan does not rotate when PWM duty cycle is 0%.


Models with the following sensor specifications are also available as options: **Without sensor** **Lock sensor**

Common Specifications

- ☐ Material Frame: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-1)
- ☐ Expected life Refer to specifications
(L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- ☐ Motor protection system Current blocking function and reverse polarity protection
- ☐ Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- ☐ Sound pressure level (SPL) At 1 m away from the air inlet
- ☐ Operating temperature Refer to specifications (Non-condensing)
- ☐ Storage temperature -30 to +70°C (Non-condensing)
- ☐ Lead wire Inlet: ⊕ Red ⊖ Black [Sensor] Yellow [Control] Brown
Outlet: ⊕ Orange ⊖ Gray [Sensor] Purple [Control] White
- ☐ Mass Approx. 310 g


Airflow - Static Pressure Characteristics

• PWM duty cycle

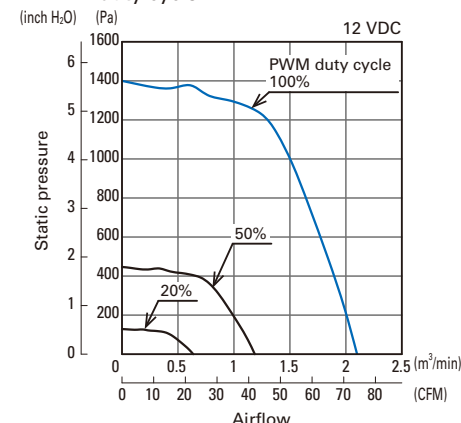


9CRLA0612P0G001
9CRLA0612P0G003

• Operating voltage range

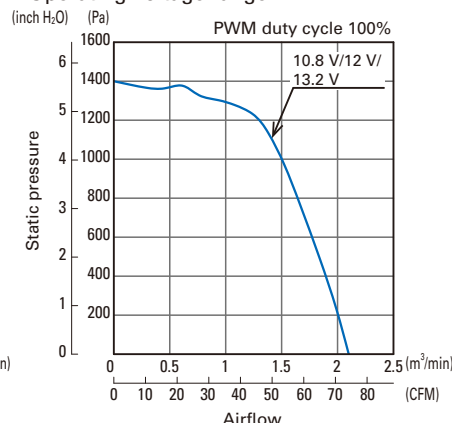


9CRLA0612P0G001
9CRLA0612P0G003

PWM Duty - Speed Characteristics Example

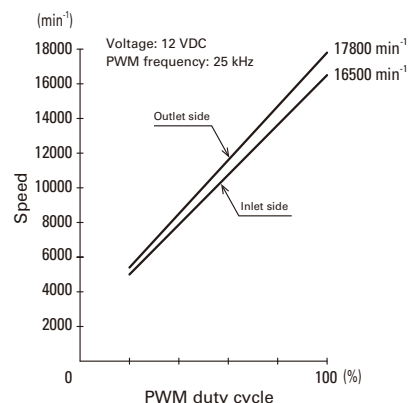

9CRLA0612P0G001
9CRLA0612P0G003


Input signal waveform



$V_{IH} = 4.75 \text{ to } 5.25 \text{ V}$ $V_{IL} = 0 \text{ to } 0.4 \text{ V}$
 PWM duty cycle (%) = $\frac{T_1}{T} \times 100$ PWM frequency 25 (kHz) = $\frac{1}{T}$
 Current source (Isource) = 5 mA max. (when control voltage is 0 V)
 Current sink (Isink) = 5 mA max. (when control voltage is 5.25 V)
 Control terminal voltage = 5.25 V max. (when control terminal is open)


When the control terminal is open, fan speed is the same as when PWM duty cycle is 100%. Either TTL input, open collector or open drain can be used for PWM control input signal.

Example of Connection Schematic

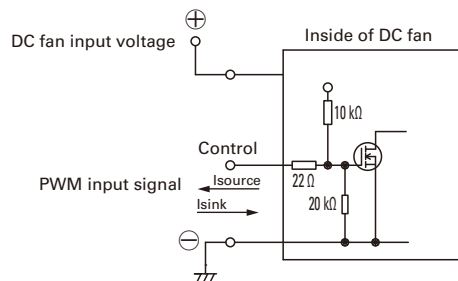

Specifications for Pulse Sensors


Output circuit: Open collector

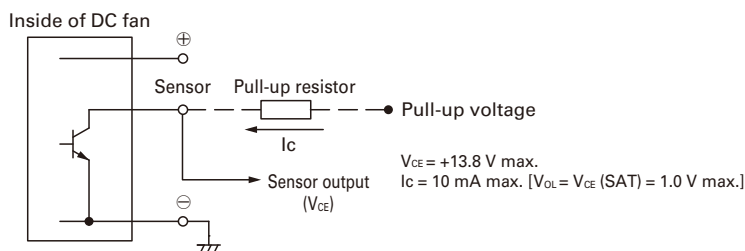

Output waveform (Need pull-up resistor)

In case of steady running


(One revolution)


$$T_{1 \text{ to } 4} \doteq (1/4) T_0$$

$$T_{1 \text{ to } 4} \doteq (1/4) T_0 = 60/4 \text{ N (s)}$$


$$N = \text{Fan speed (min}^{-1}\text{)}$$

Dimensions (unit: mm)

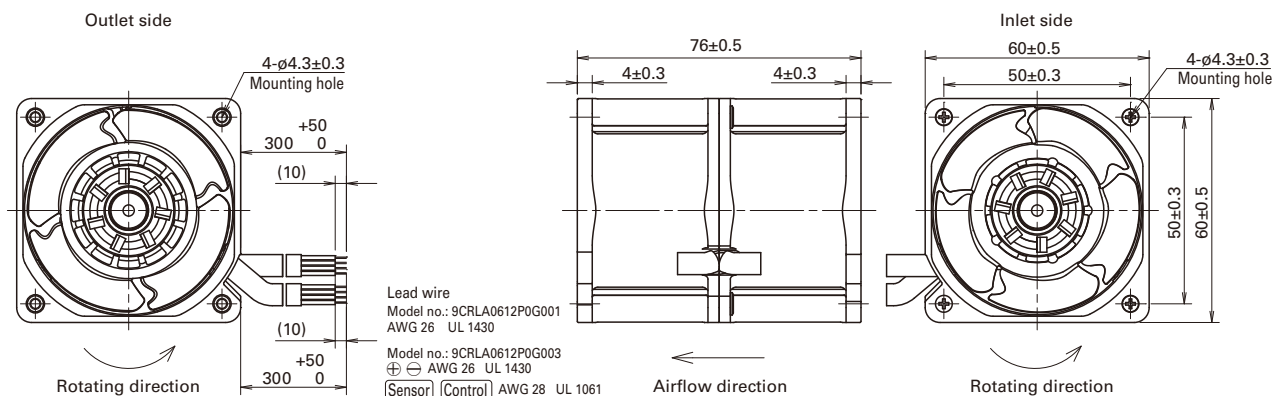

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side



Notice

- Please read the "Safety Precautions" on our website before using the product.
- The products shown in this catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.
- For protecting fan bearings against electrolytic corrosion near strong electromagnetic noise sources, we provide effective countermeasures such as Electrolytic Corrosion Proof Fans and EMC guards. Contact us for details.

SANYO DENKI CO., LTD.

3-33-1, Minami-Otsuka, Toshima-ku, Tokyo 170-8451, Japan TEL: +81 3 5927 1020

<https://www.sanyodenki.com>

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies.

"San Ace" is a trademark of SANYO DENKI CO., LTD.

Specifications are subject to change without notice.

CATALOG No. C1083B002 '18.5



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.