

PHA2729-240M




Radar Pulsed Power Module, 240W
2700MHz to 2900MHz, 100µS Pulse, 10% Duty

Released—11-04-2002

Features

- In-phase combined pulsed power transistors
- Input and output matched to 50 Ohms
- Soft substrate circuit board
- Nickel plated copper flange
- Easily combined for high power transmitters
- MTF>1x10⁶ hrs at Tflange=45°C

Product Image

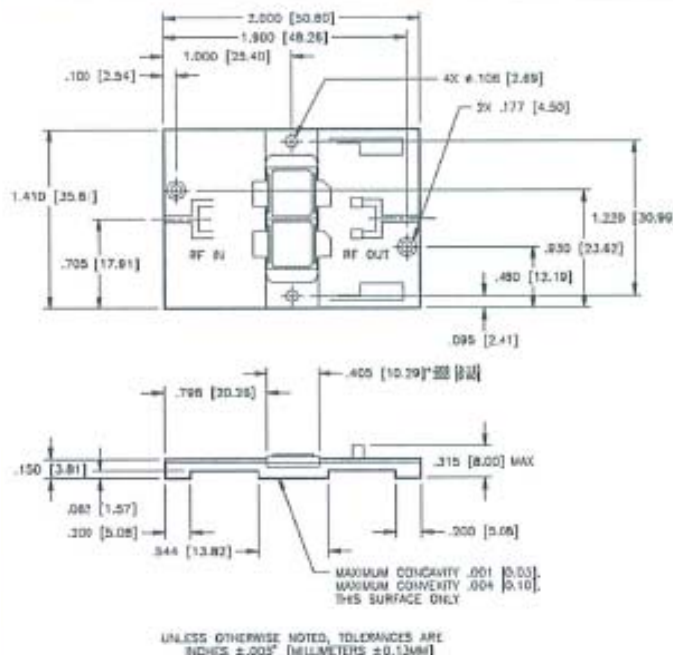

ABSOLUTE MAXIMUM RATINGS AT 25°C

| Parameter | Symbol | Rating | Units |
|-------------------------|------------------|-------------|-------|
| Supply Voltage | V _{CC} | 40 | V |
| Input Power | P _{in} | 55 | Wpk |
| Output Power | P _{out} | 325 | Wpk |
| Thermal Resistance | θ _{JC} | 0.35 | °C/W |
| Total Power Dissipation | P _D | 500 | W |
| Operating Case Temp. | T _C | -30 to +100 | °C |
| Storage Temp. | T _{STG} | -40 to +125 | °C |

ELECTRICAL CHARACTERISTICS AT 25°C

| Parameter | Symbol | Min | Max | Units | Test Conditions |
|-----------------------------------|-----------------|-----|-------|---------|---|
| Input Power | P _{IN} | - | 44 | Wpk | V _{CC} = 36V, P _{out} = 240Wpk, F = 2.7, 2.8, 2.9GHz |
| Collector Current | I _c | - | 16.97 | A | V _{CC} = 36V, P _{out} = 240Wpk, F = 2.7, 2.8, 2.9GHz |
| Input Return Loss | RL | 10 | - | dB | V _{CC} = 36V, P _{out} = 240Wpk, F = 2.7, 2.8, 2.9GHz |
| Pulse Amplitude Droop | Droop | - | 0.7 | dB | V _{CC} = 36V, P _{out} = 240Wpk, F = 2.7, 2.8, 2.9GHz |
| 2nd Harmonic | 2fc | - | -20 | dB | V _{CC} = 36V, P _{out} = 240Wpk, F = 2.7, 2.8, 2.9GHz |
| Insertion Phase Deviation | Δφ | -20 | +20 | Degrees | V _{CC} = 36V, P _{out} = 240Wpk, F = 2.7, 2.8, 2.9GHz |
| Load Mismatch Stability | VSWR-S | - | 1.5:1 | - | V _{CC} = 36V, P _{out} = 240Wpk, F = 2.7, 2.8, 2.9GHz |
| Overdrive/Load Mismatch Tolerance | OD/ VSWR-T | - | 2:1 | - | V _{CC} = 36V, Pin=(Pin@P _{out} =240Wpk)+0.6dB, F = 2.7, 2.8, 2.9GHz |

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Radar Pulsed Power Module, 240W
 2700MHz to 2900MHz, 100µS Pulse, 10% Duty


Released—11-04-2002

Typical Performance Curves

Collector Efficiency and Power Gain vs. Power Output
 Vcc=36VDC, Pulse Width=100µS, Duty=10%, 2.7GHz

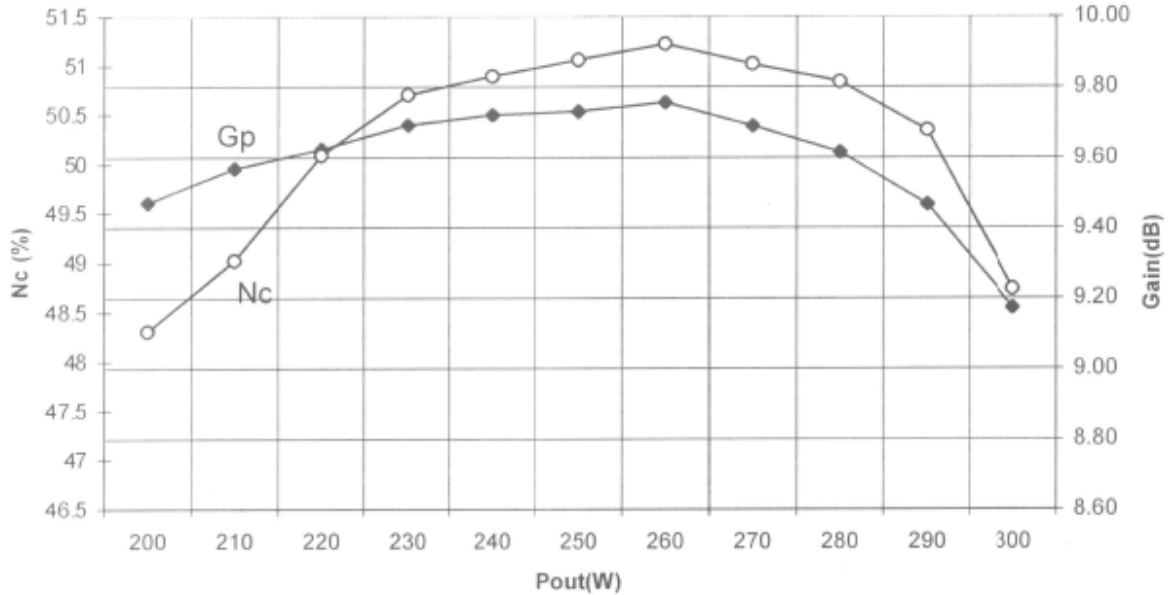

Collector Efficiency and Power Gain vs. Power Output
 Vcc=36VDC, Pulse Width=100µS, Duty=10%, 2.8GHz

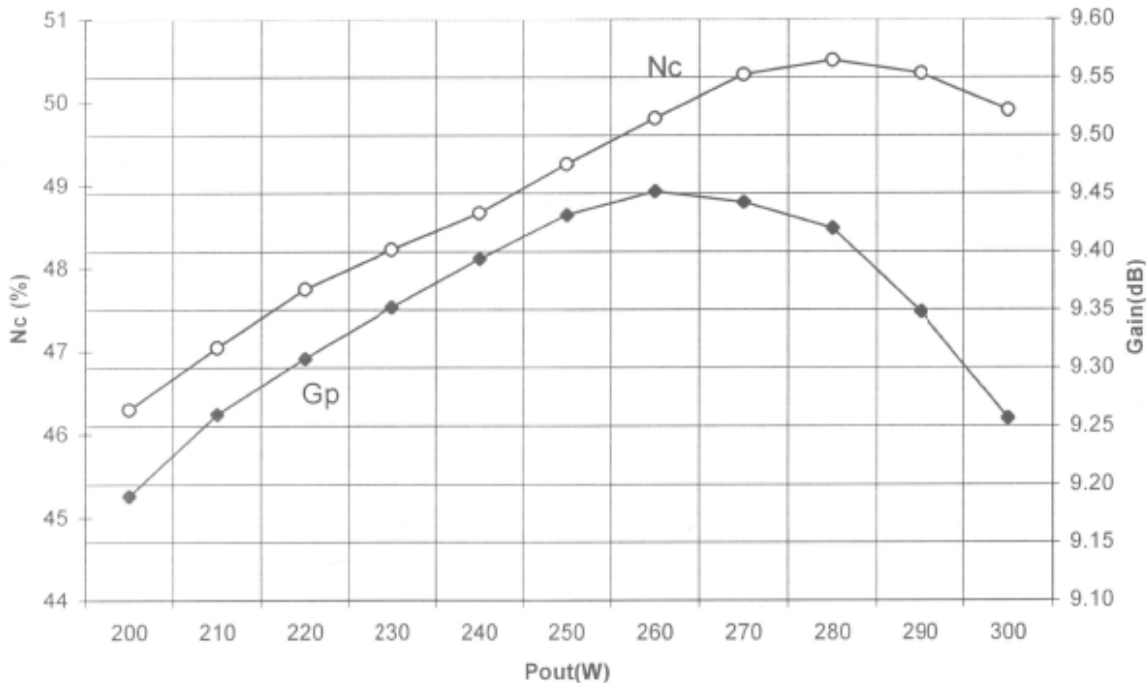

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


PHA2729-240M



Radar Pulsed Power Module, 240W
2700MHz to 2900MHz, 100µS Pulse, 10% Duty

Released—11-04-2002

Collector Efficiency and Power Gain vs. Power Output
Vcc=36VDC, Pulse Width=100µS, Duty=10%, 2.9GHz

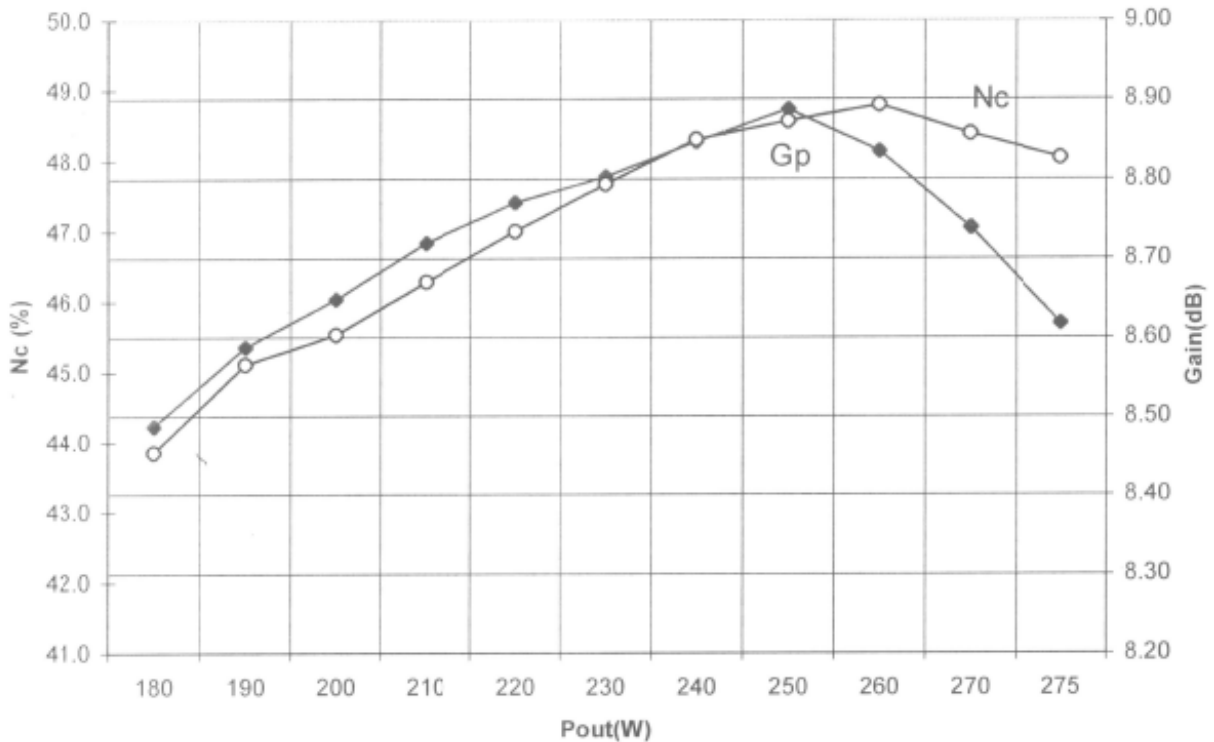

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.