
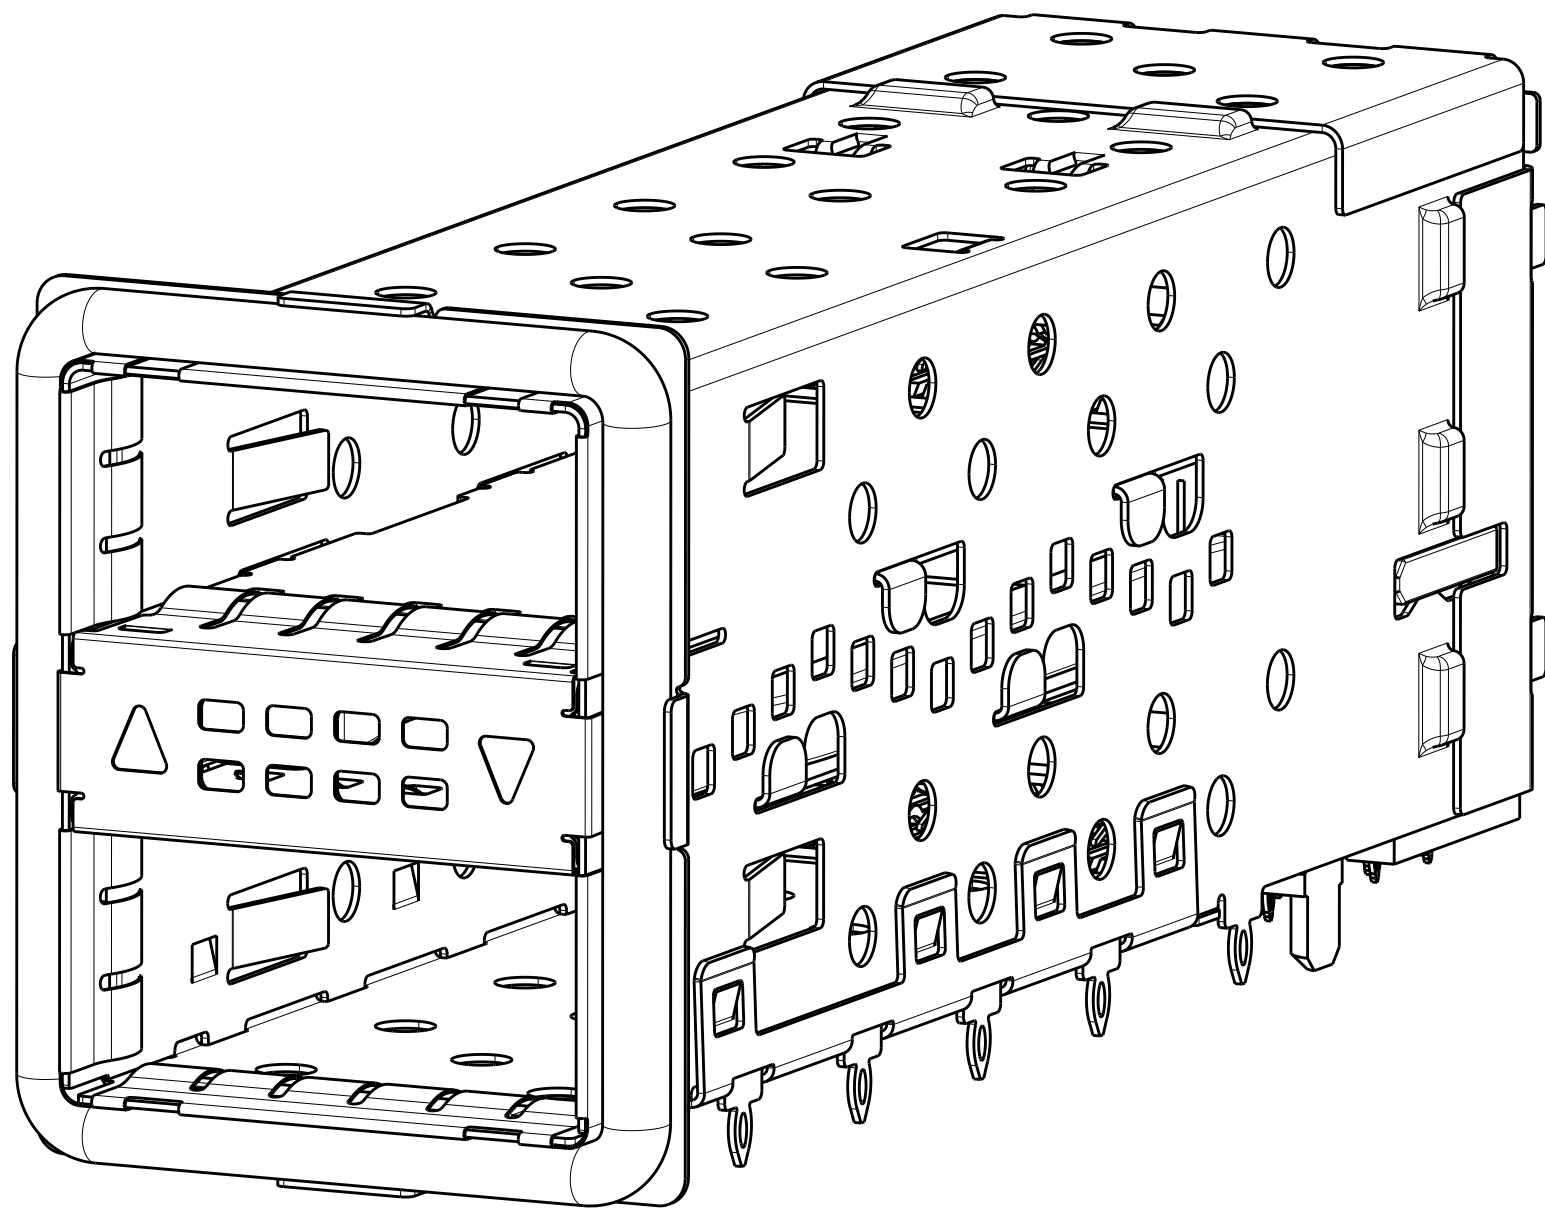
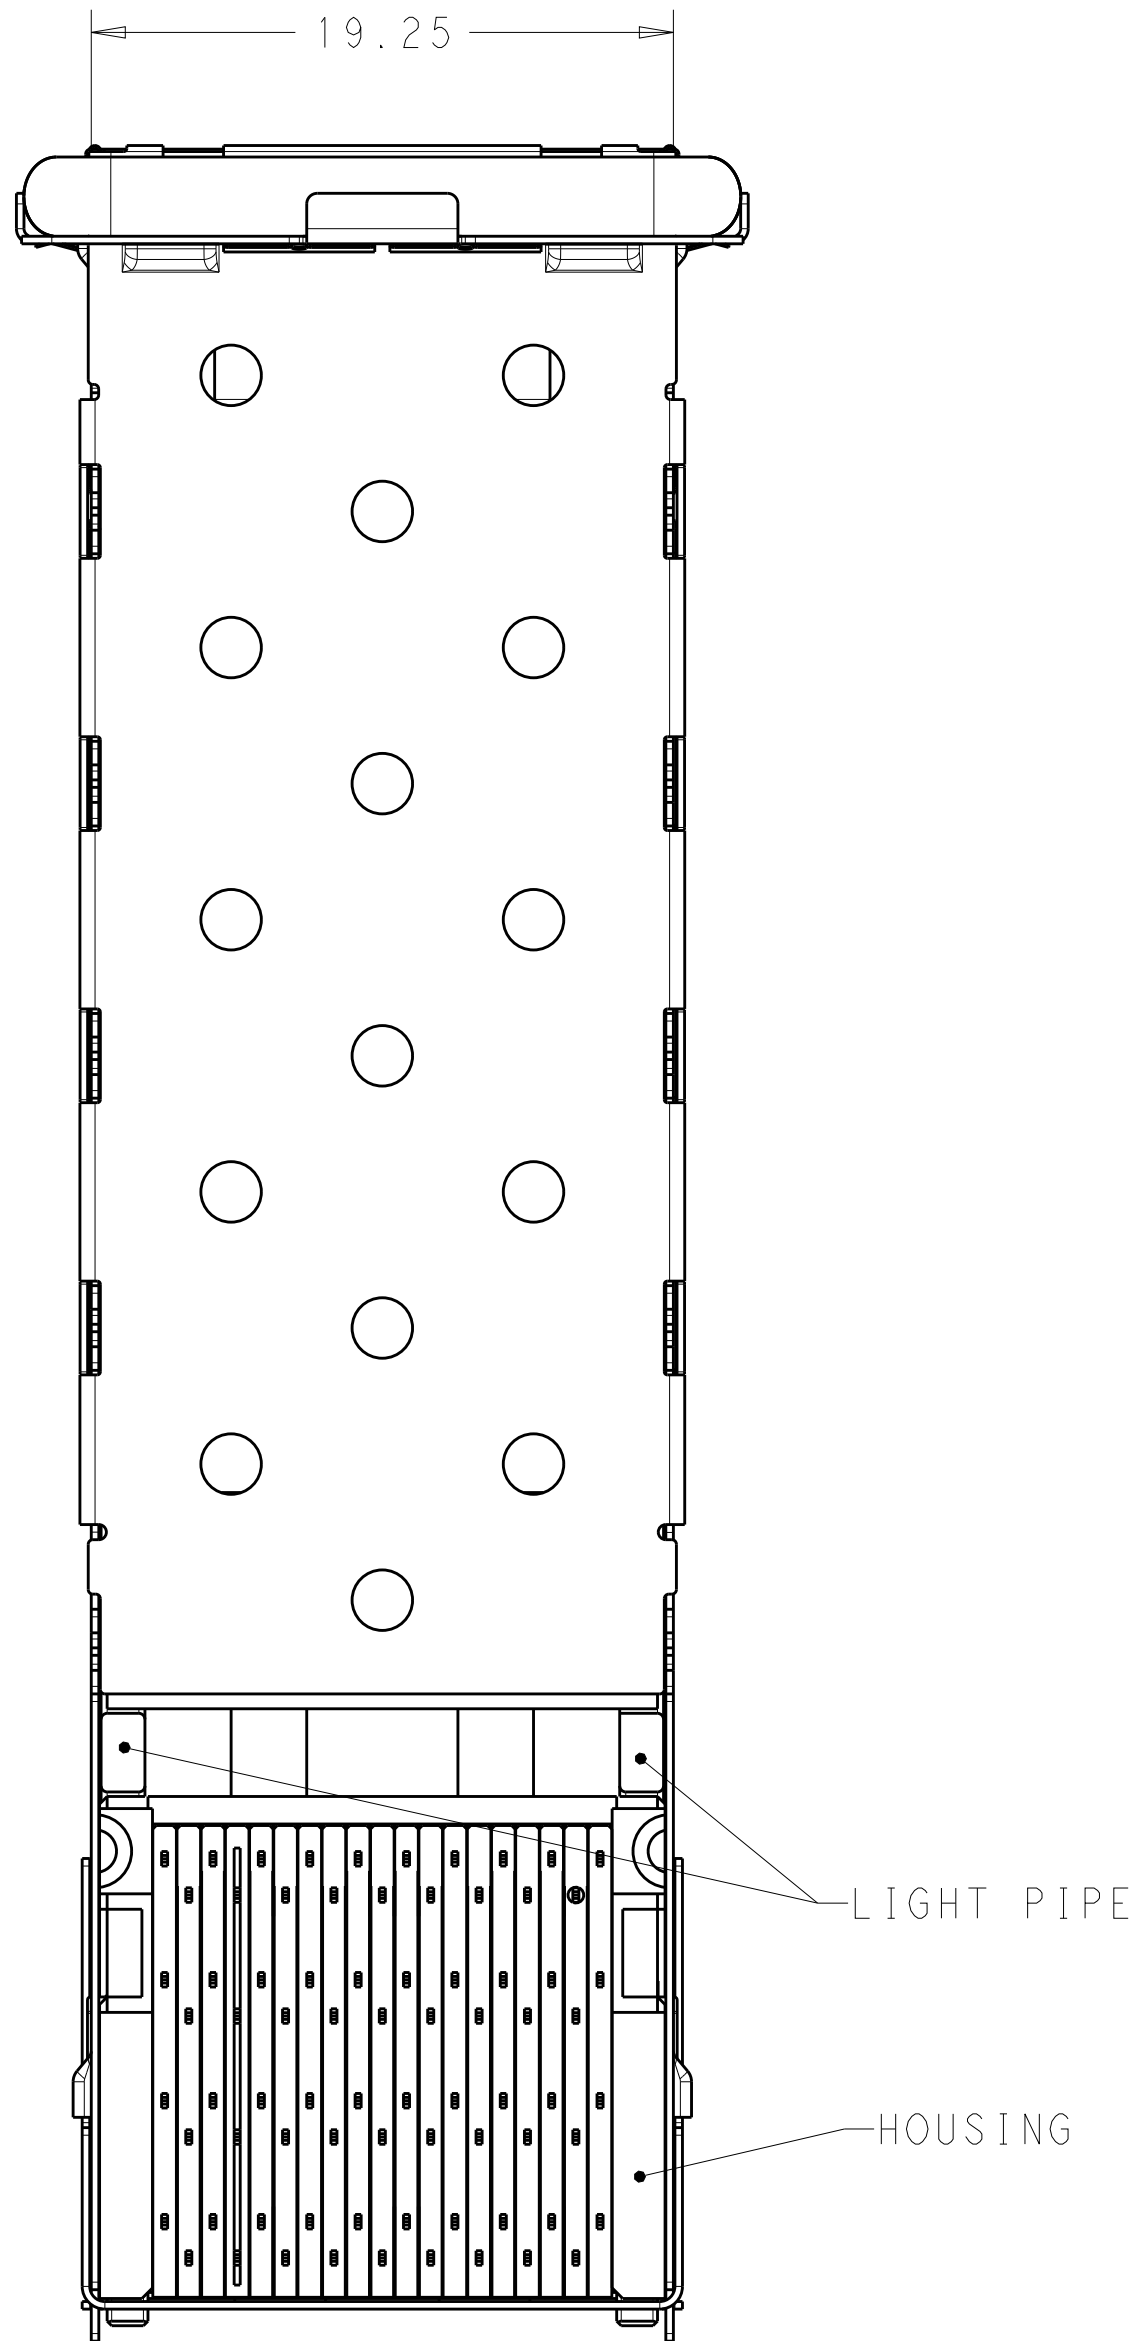
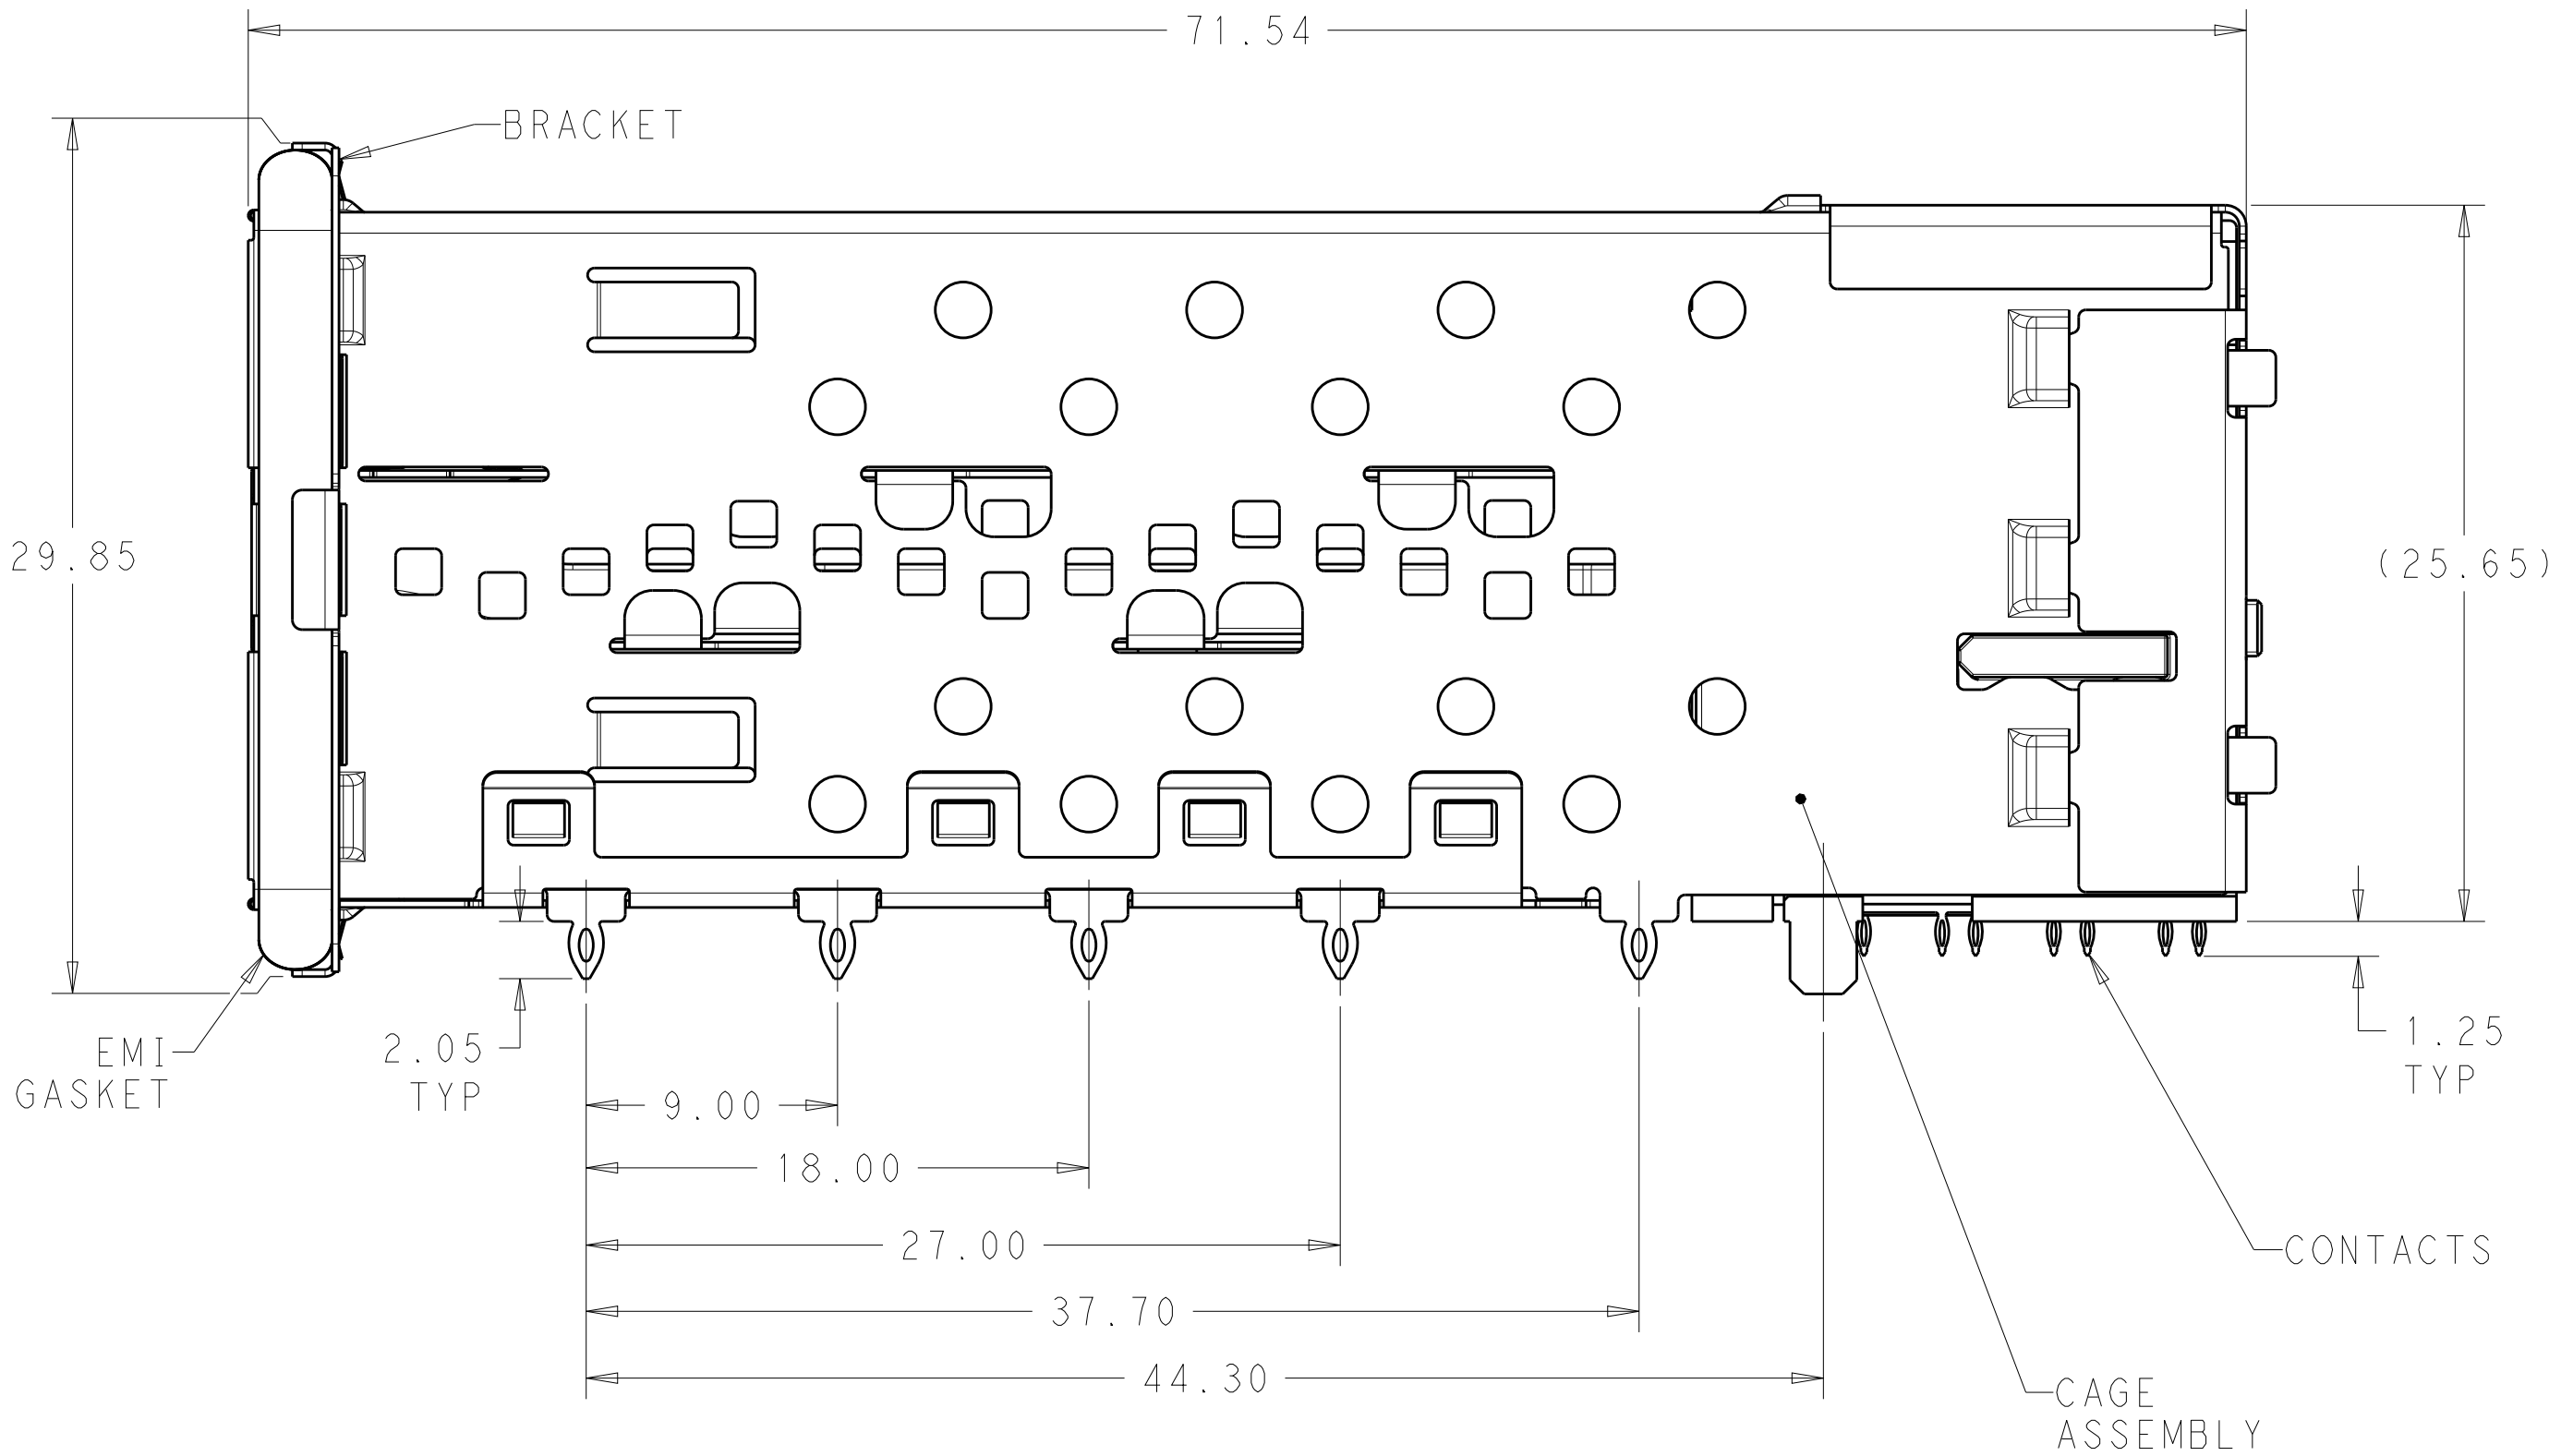


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
GP	00		7	add LED definition and update EMI spring	13NOV2013	RG	MC	
			8	UPDATE DEFAULT TOLERANCE	3APR2014	RG	MC	
			9	ADD APPLICATION SPEC	6NOV2014	RG	MC	
			10	ADD 2085945-8	18MAY2015	RG	SH	

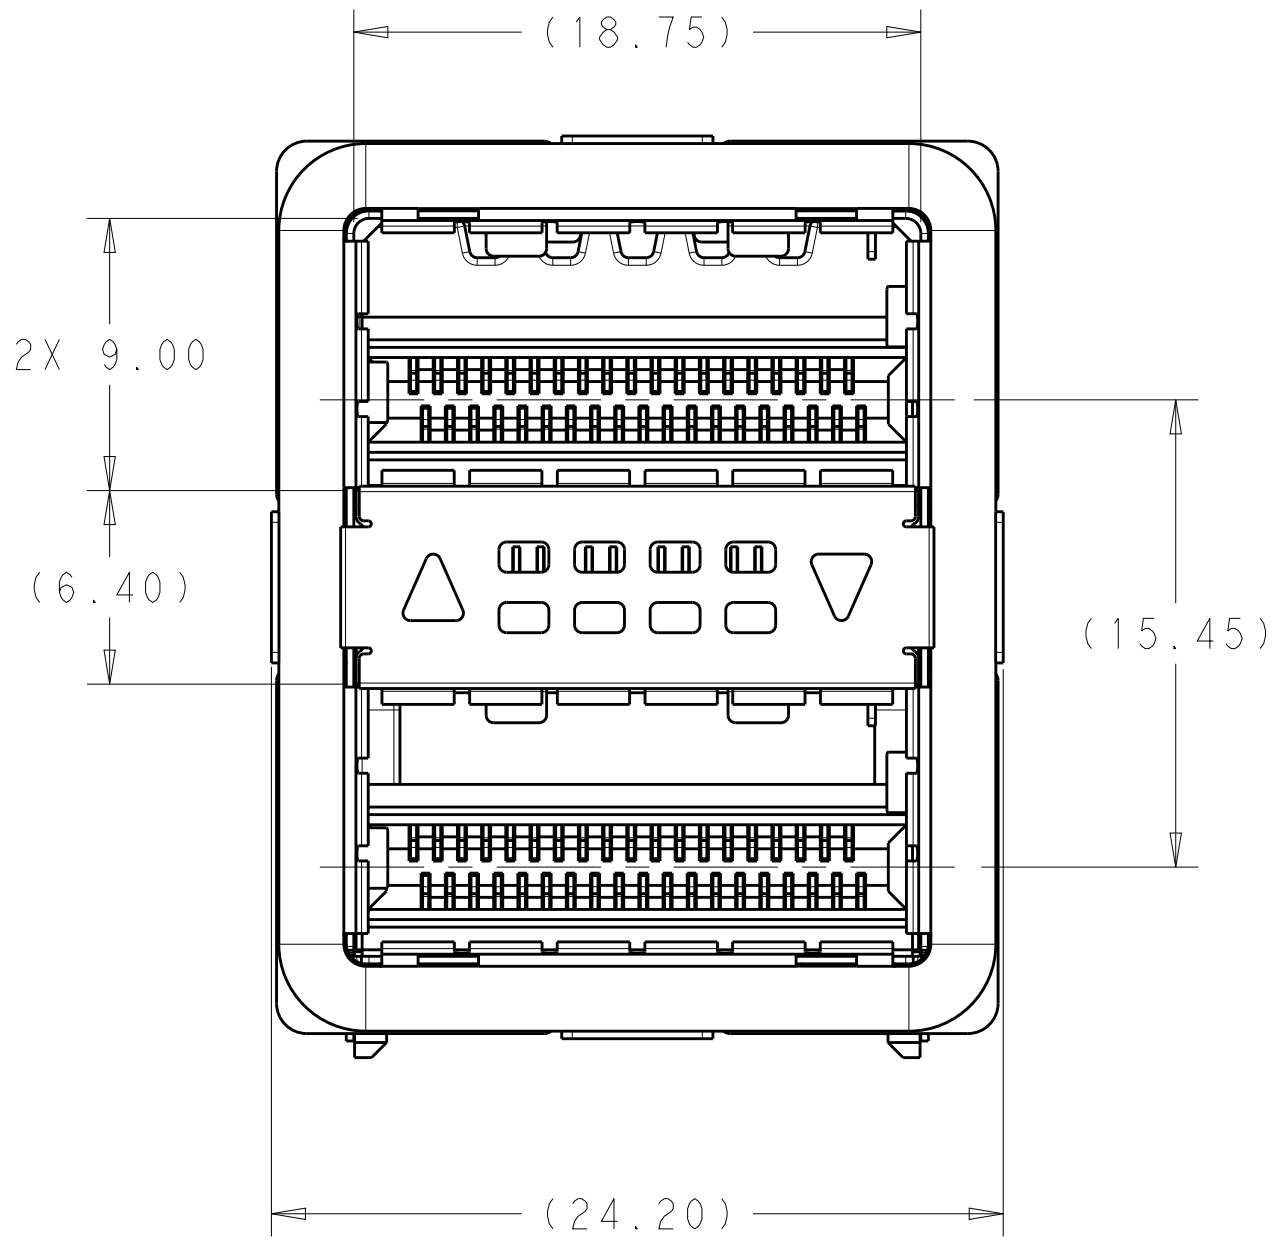

2085945-1 SHOWN
SCALE 4:1



- 1 MATERIALS:
CAGE ASSEMBLY- NICKEL SILVER ALLOY PER ASTM B 122.
BRACKET- STAINLESS STEEL.
EMI GASKET- NICKEL-GRAPHITE FILLED SILICONE.
HOUSING- BLACK LCP, UL 94V-0 RATED.
CHICKLET- BLACK LCP, UL 94V-0 RATED.
LIGHT PIPE- POLYCARBONATE, CLEAR, UL 94V-2 RATED.
CONTACT- COPPER ALLOY.
- 2 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
3. MINIMUM PCB THICKNESS OF 1.57mm.
- 4 CONTACT FINISH- CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-127010, BASED ON EIA/ECA-364-1000.01A, (CONTROLLED ENVIRONMENT APPLICATIONS) ON MATING INTERFACE, TIN ON NEEDLE EYE.
- 5 THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS AND SIGNAL TRACES. TOP SIDE ONLY. TOP SIDE TRACES ALLOWED WITHIN CONNECTOR HOLE PATTERN.
- 6 LIGHT PIPE PAD LAYOUT IS FOR 0805 LOW PROFILE LED PACKAGE WITH A HEIGHT OF 0.8mm.

OUTER LIGHT PIPES WITH CUSTOMIZED GASKET	2085945-8
BOTH LIGHT PIPES	2085945-7
INNER LIGHT PIPES	2085945-6
OUTER LIGHT PIPES	2085945-5
NO LIGHT PIPES	2085945-4
BOTH LIGHT PIPES	2085945-3
INNER LIGHT PIPES	2085945-2
OUTER LIGHT PIPES	2085945-1
DESCRIPTION	PART NUMBER


THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT
CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER 08AUG11	TE Connectivity	
DIMENSIONS:		CHK E. WICKES 08AUG11	PRELIMINARY	
mm		APVD E. WICKES 08AUG11	CAGE AND PT CONNECTOR ASSEMBLY WITH EMI GASKET, PRESS FIT, 2X1, STACKED QSPF+	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO	
0 PLC ±.30		108-127010	RESTRICTED TO	
1 PLC ±0.25		APPLICATION SPEC	A100779C=2085945	
2 PLC ±.25		114-32020	SCALE 4:1	
3 PLC ±.25		WEIGHT	SHEET 1 OF 4	
4 PLC ±.25		CUSTOMER DRAWING	REV 10	
ANGLES FINISH				

THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT
CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

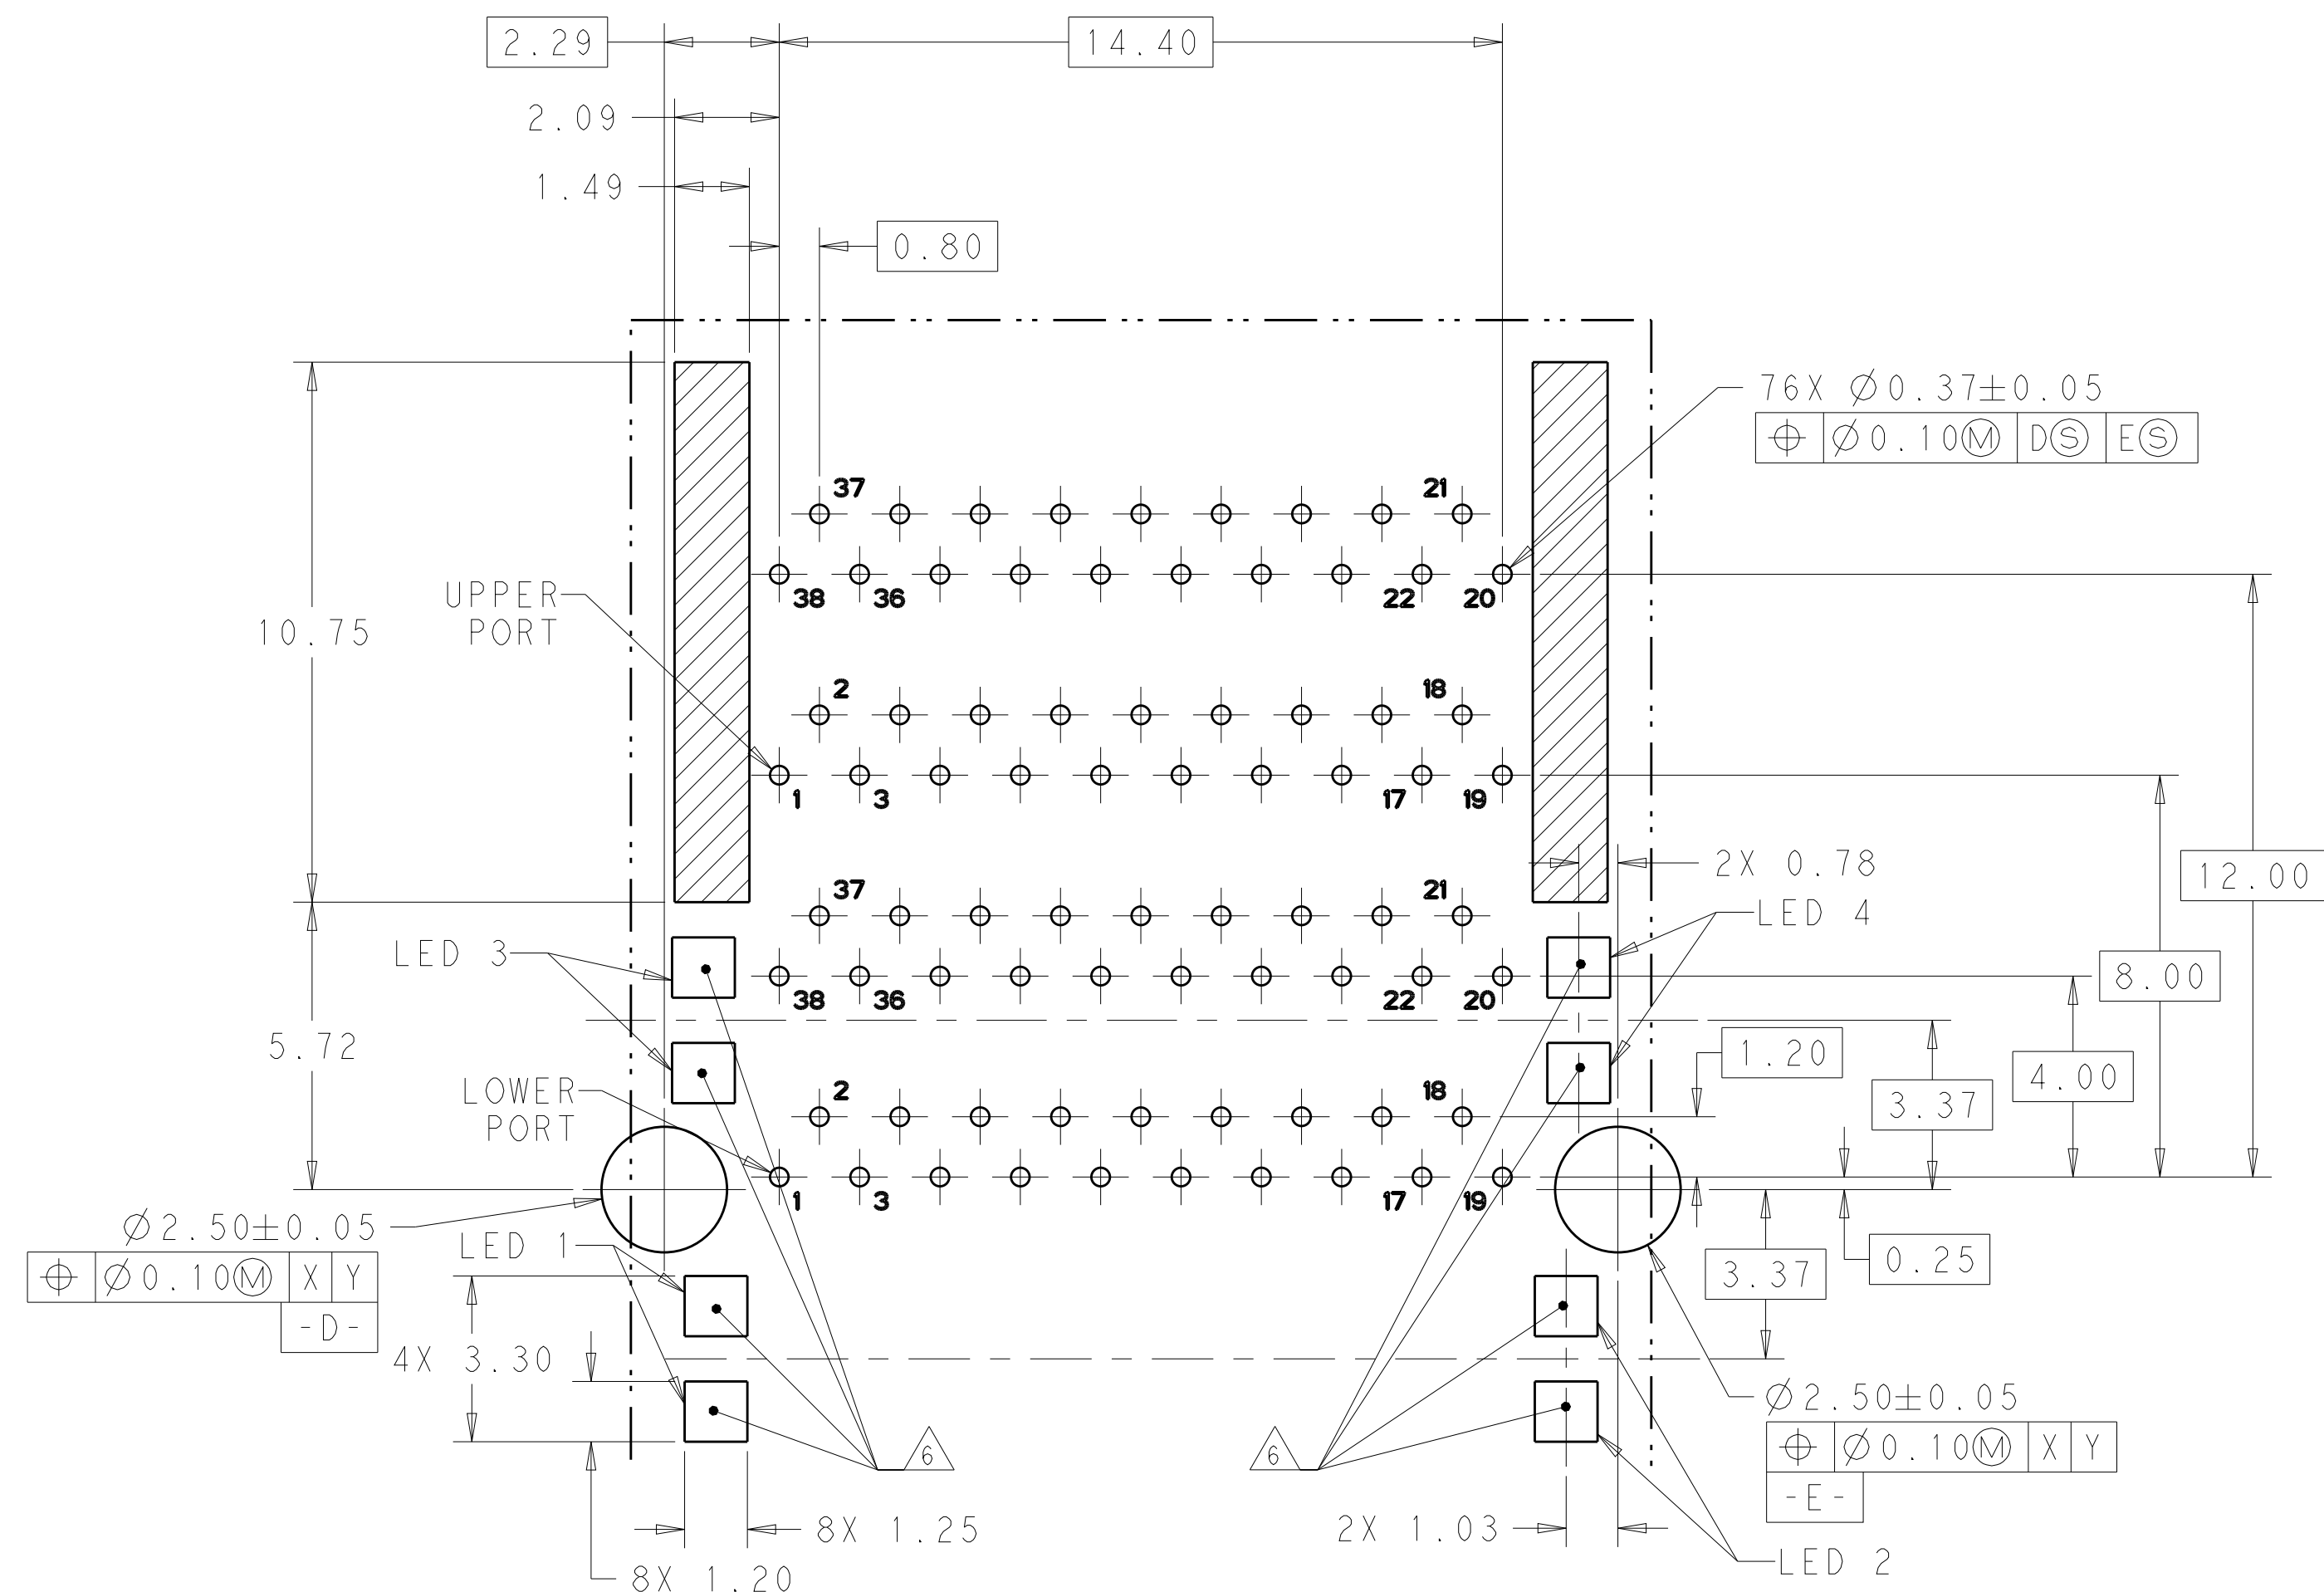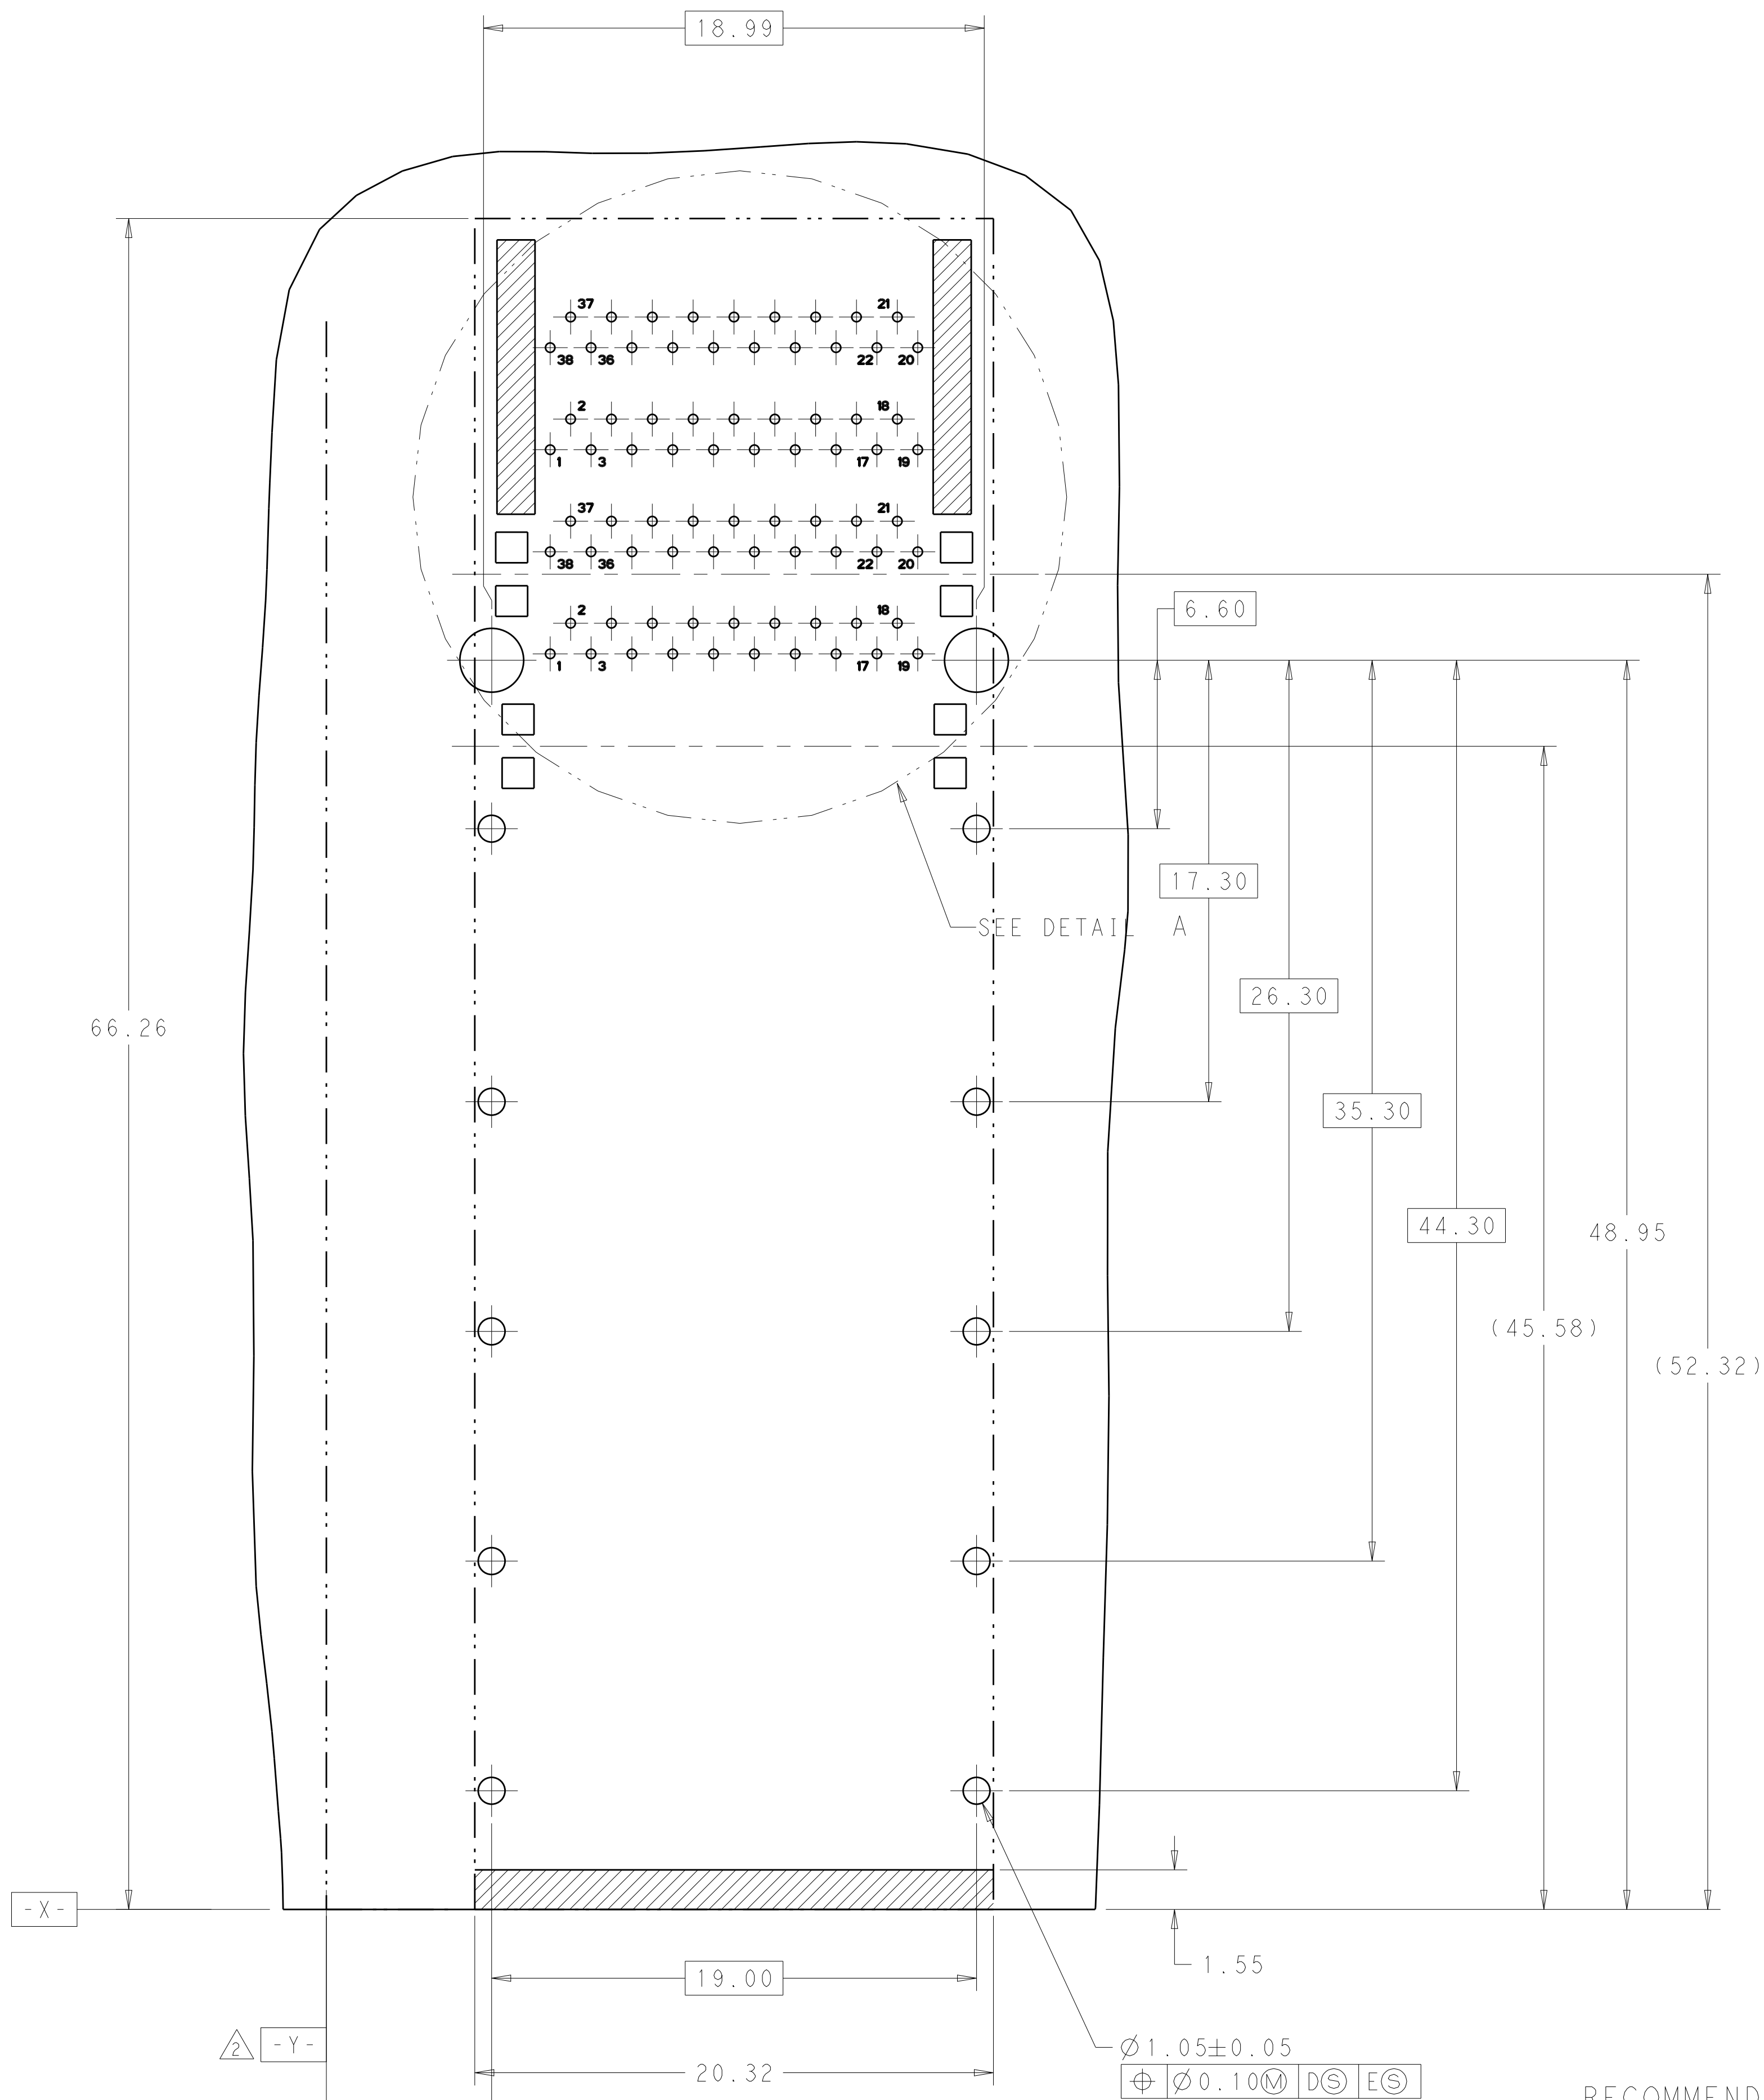

DETAIL A
SCALE 8:1


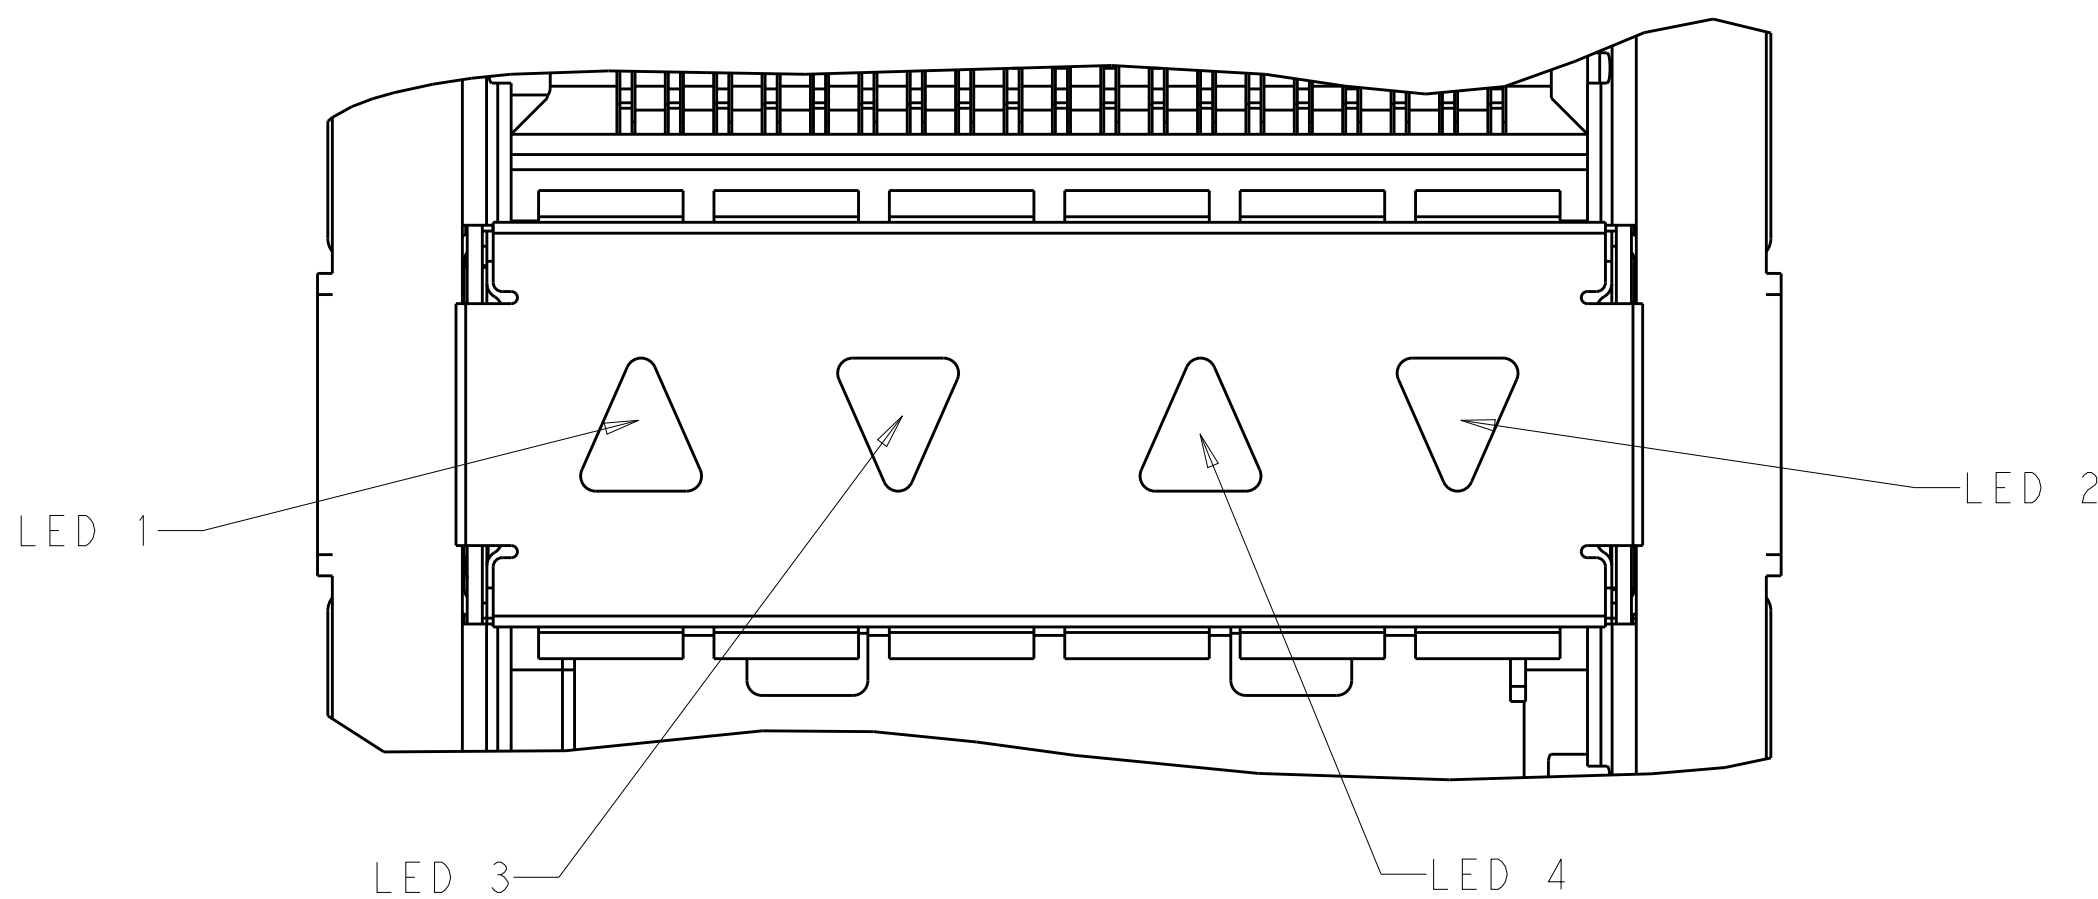


LED DEFINITION
SCALE 8:1

RECOMMENDED PCB LAYOUT 
COMPONENT SIDE OF BOARD
SCALE 4:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. NO. MCMASTER 08AUG11		 TE Connectivity	
		COP. BY E. WICKES 08AUG11			
DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
mm				CAGE AND PT CONNECTOR ASSEMBLY, WITH EM1 GASKET, PRESS FIT, 2X1, STACKED OSFP#	
		0 PLOC ±.010 2 PLOC ±.010 2 PLOC ±.025 4 PLOC ±. 4 PLOC ±. ANGLES ±. FINISH		PRODUCT SPEC 108-127010 APPLICATION SPEC 114-32020 WEIGHT -	
		SIZE		RESTRICTED TO	
		CAGE CODE		DRAWING NO	
		A100779		C-2085945	
MATERIAL		CUSTOMER DRAWING		SCALE 4:1 SHEET 2 OF 4 REV 1	


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

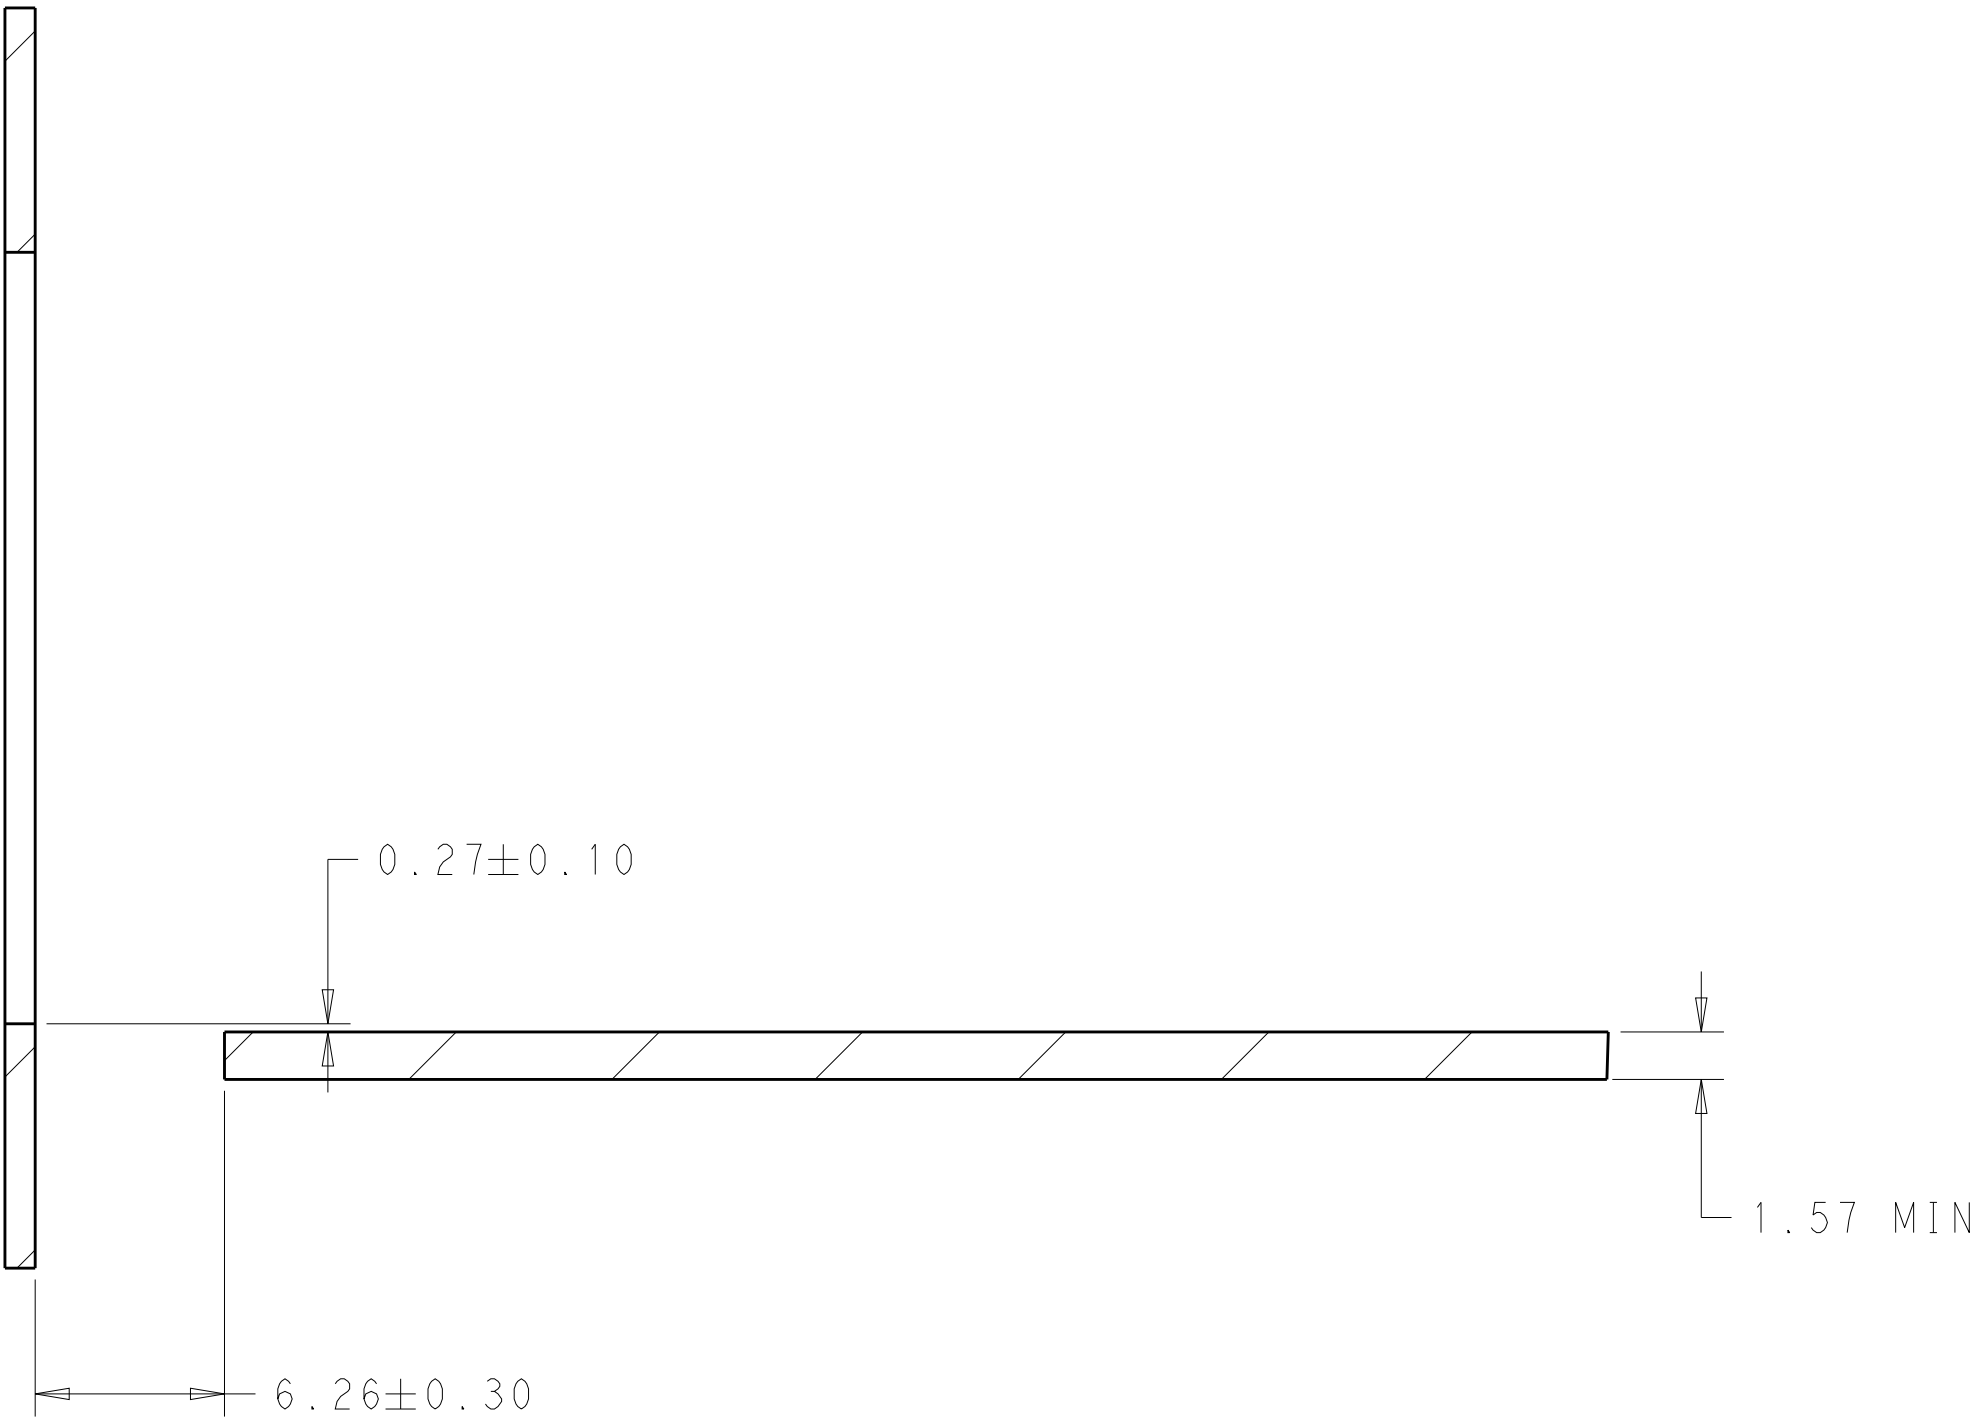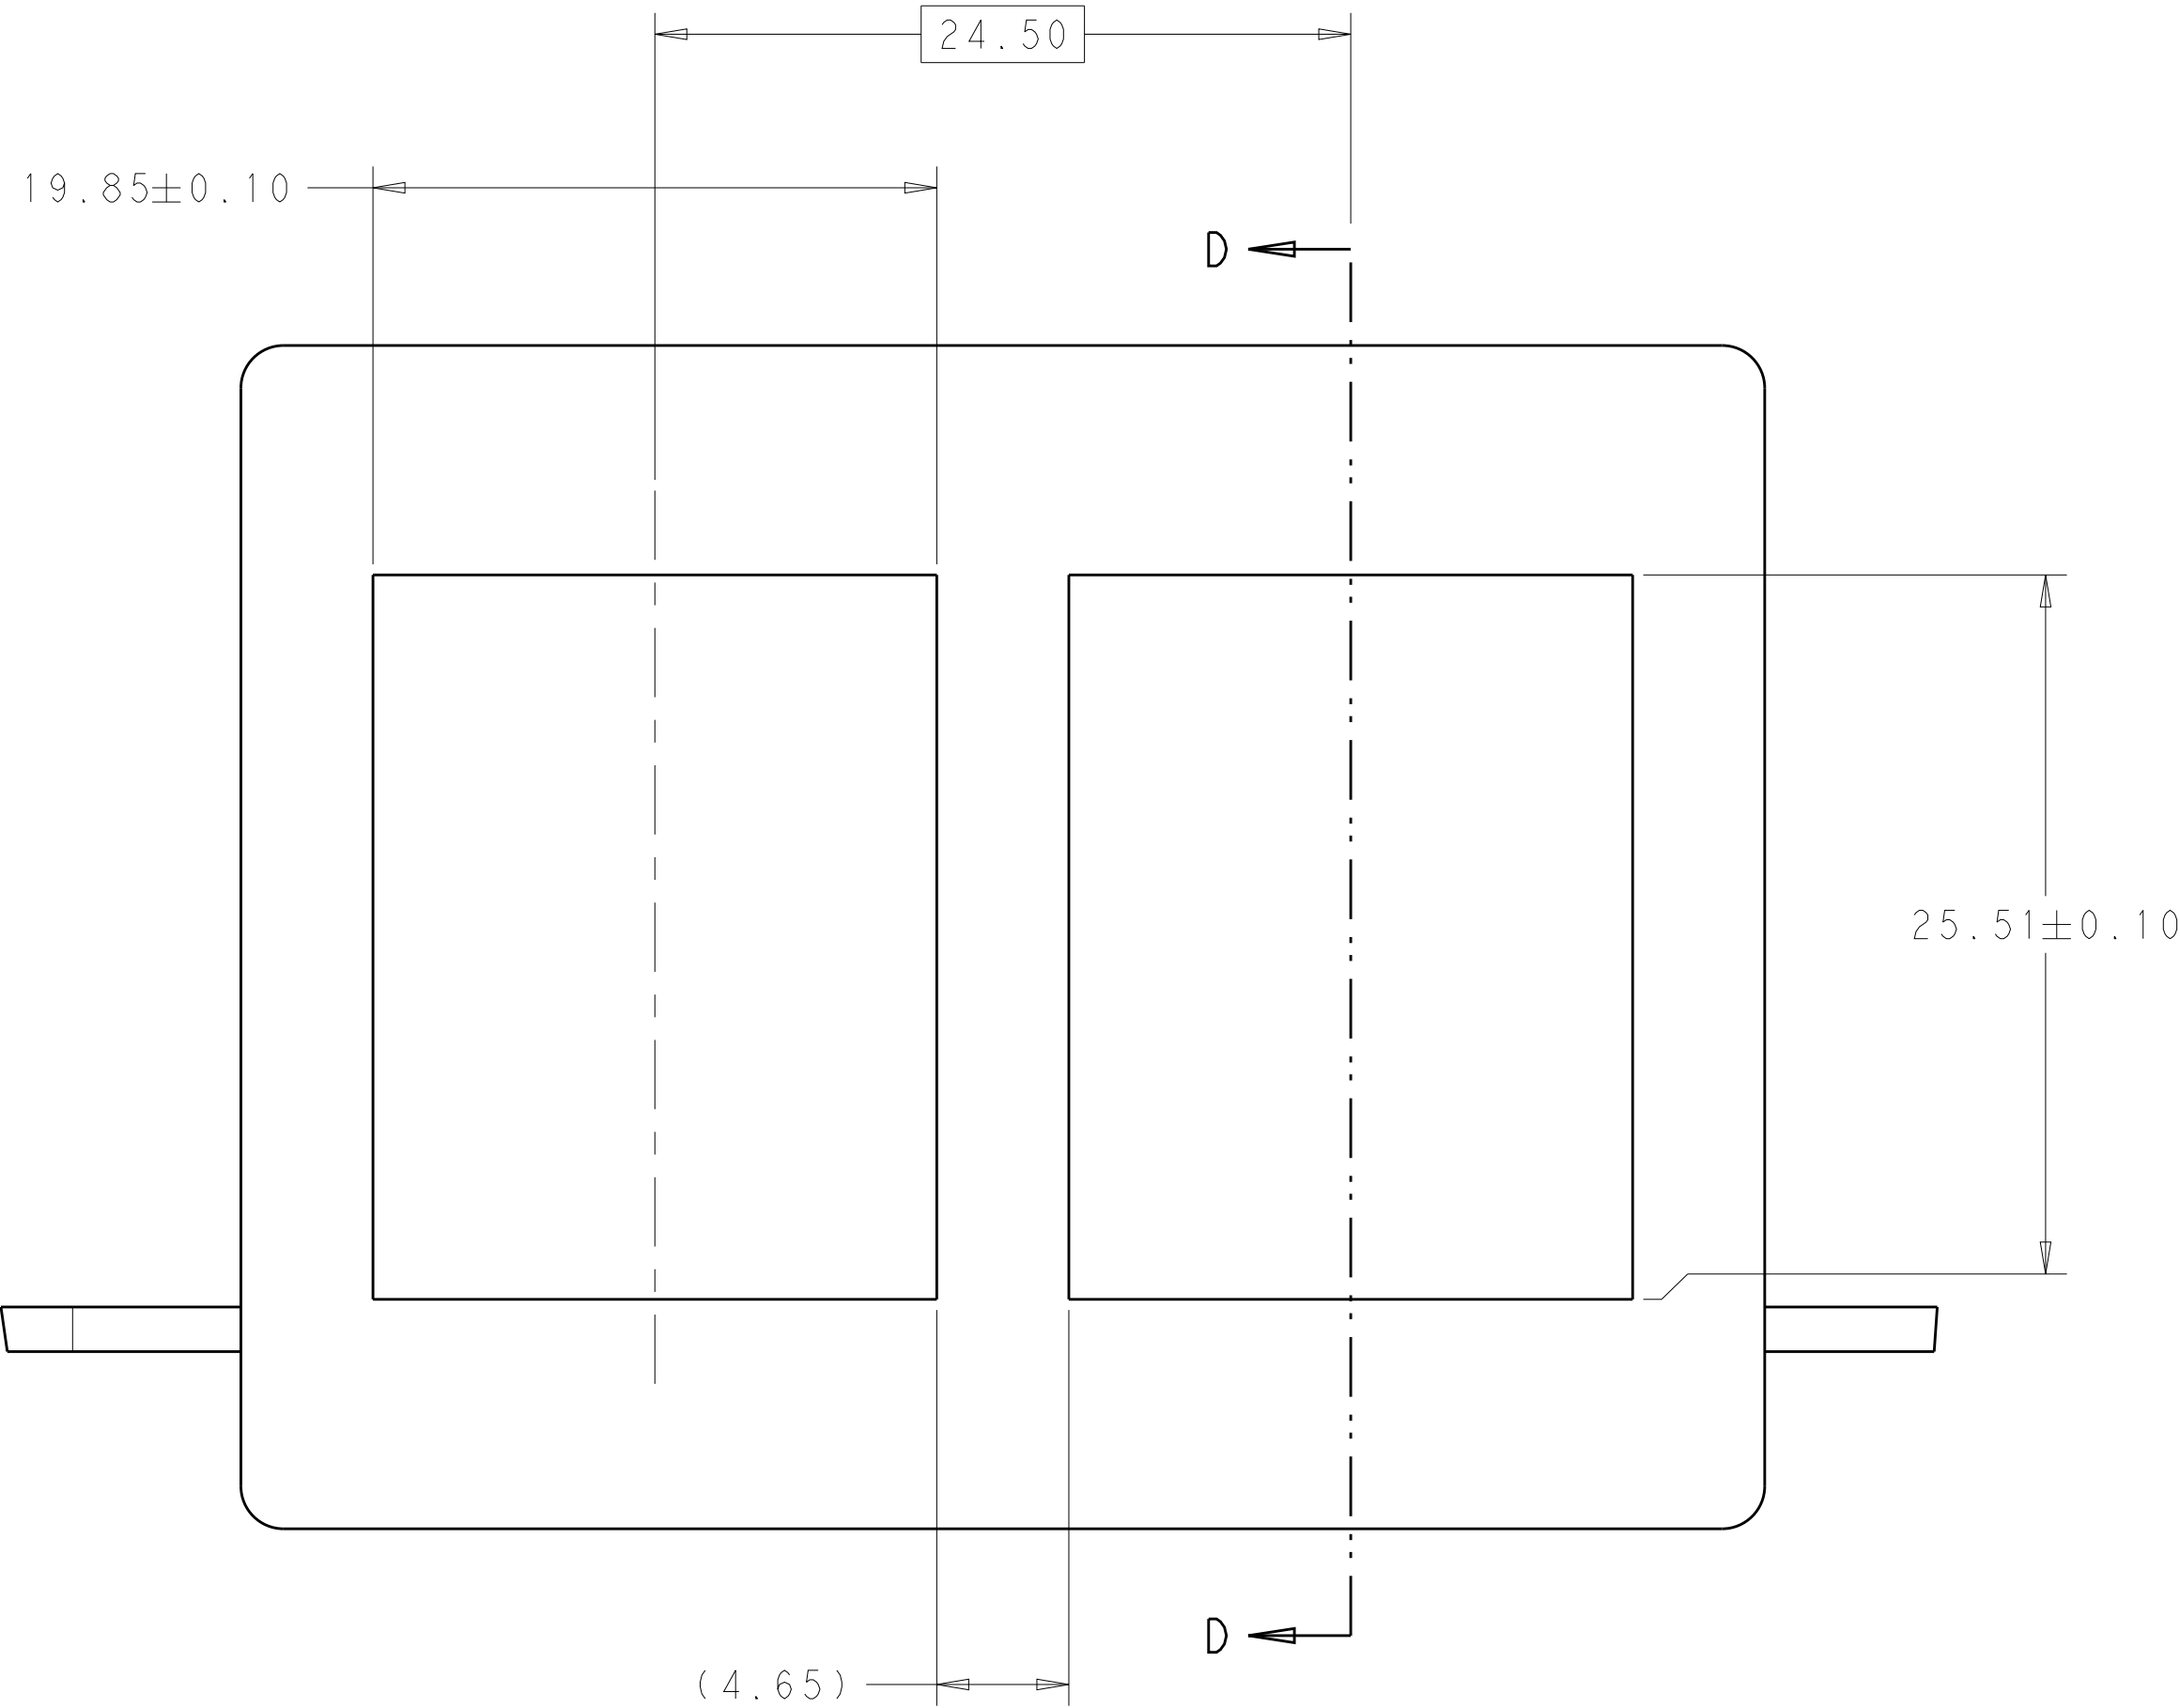








SECTION D-D

RECOMMENDED PANEL CUTOUT
AND PC BOARD, PANEL POSITION
SCALE 4:1

THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT
CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER	08AUG11	 TE Connectivity	
DIMENSIONS:		CHK E. WICKES	08AUG11		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD F. WICKES	08AUG11	NAME	CAGE AND PT CONNECTOR ASSEMBLY, WITH EMI GASKET, PRESS FIT, 2X1, STACKED QSFP+
		PRODUCT SPEC			
	0 PLC ± 1 PLC ±0.30 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± FINISH ±	108-127010		SIZE	CAGE CODE
		APPLICATION SPEC			
MATERIAL		114-32020		A1	00779C=2085945
		WEIGHT			
CUSTOMER DRAWING		SCALE		4:1	
		SHEET		3	
		OF		4	
		REV		10	

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

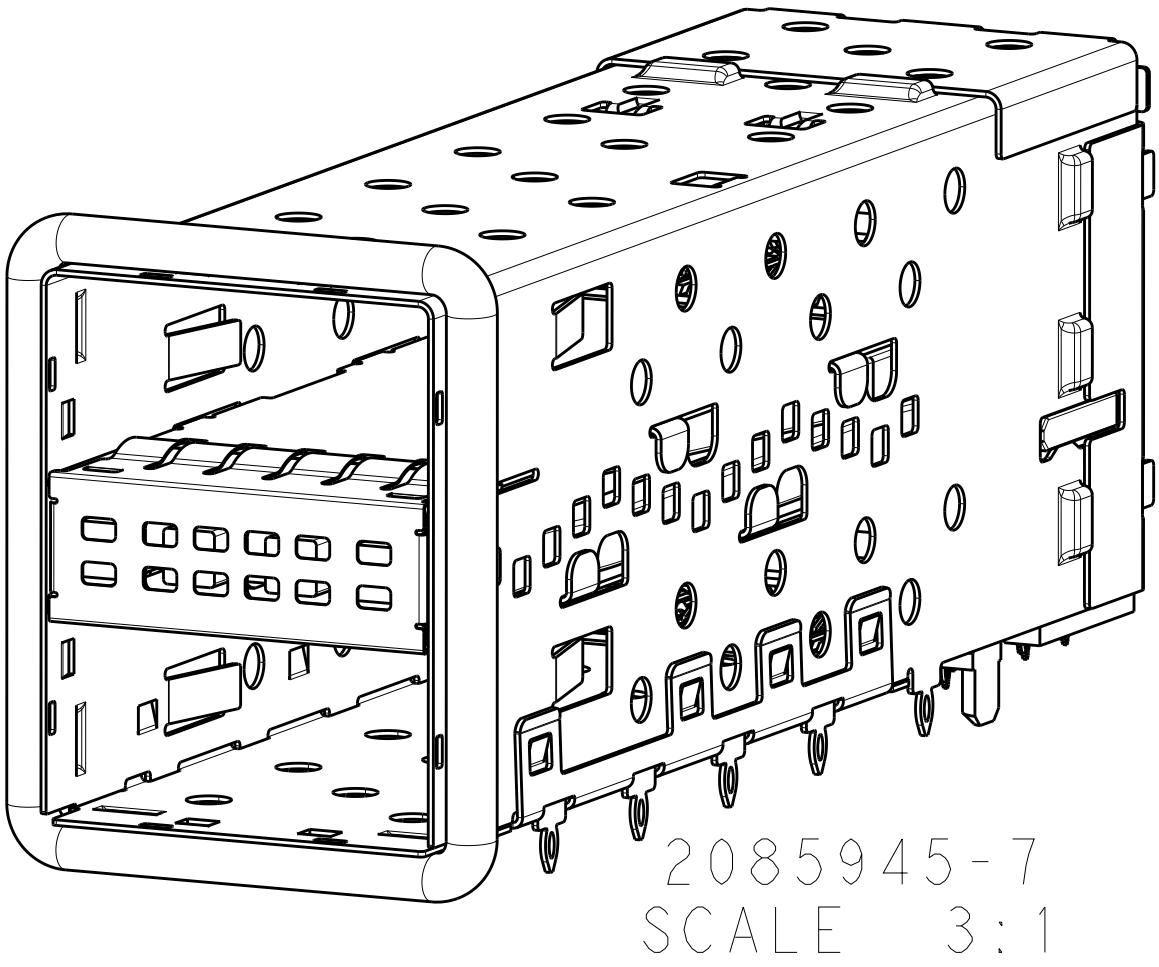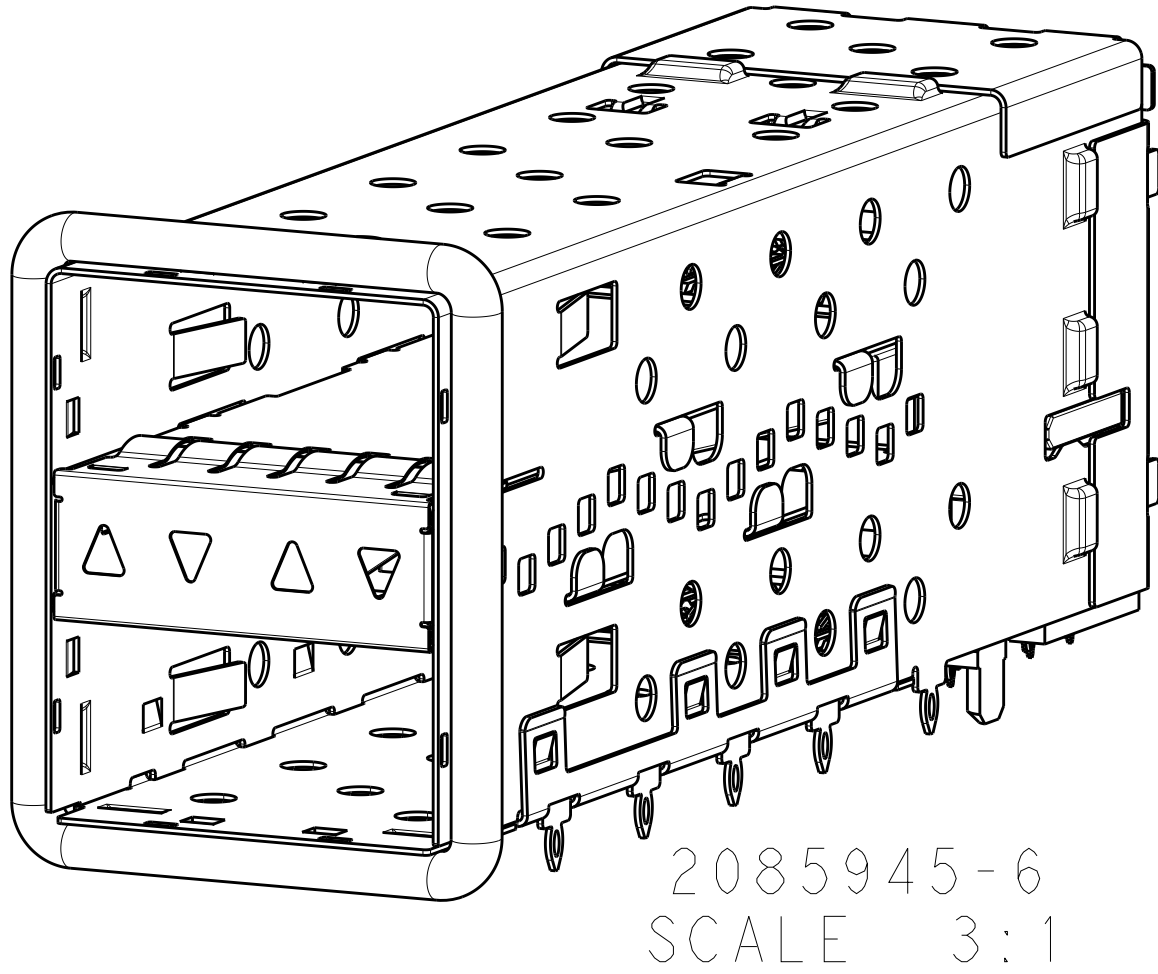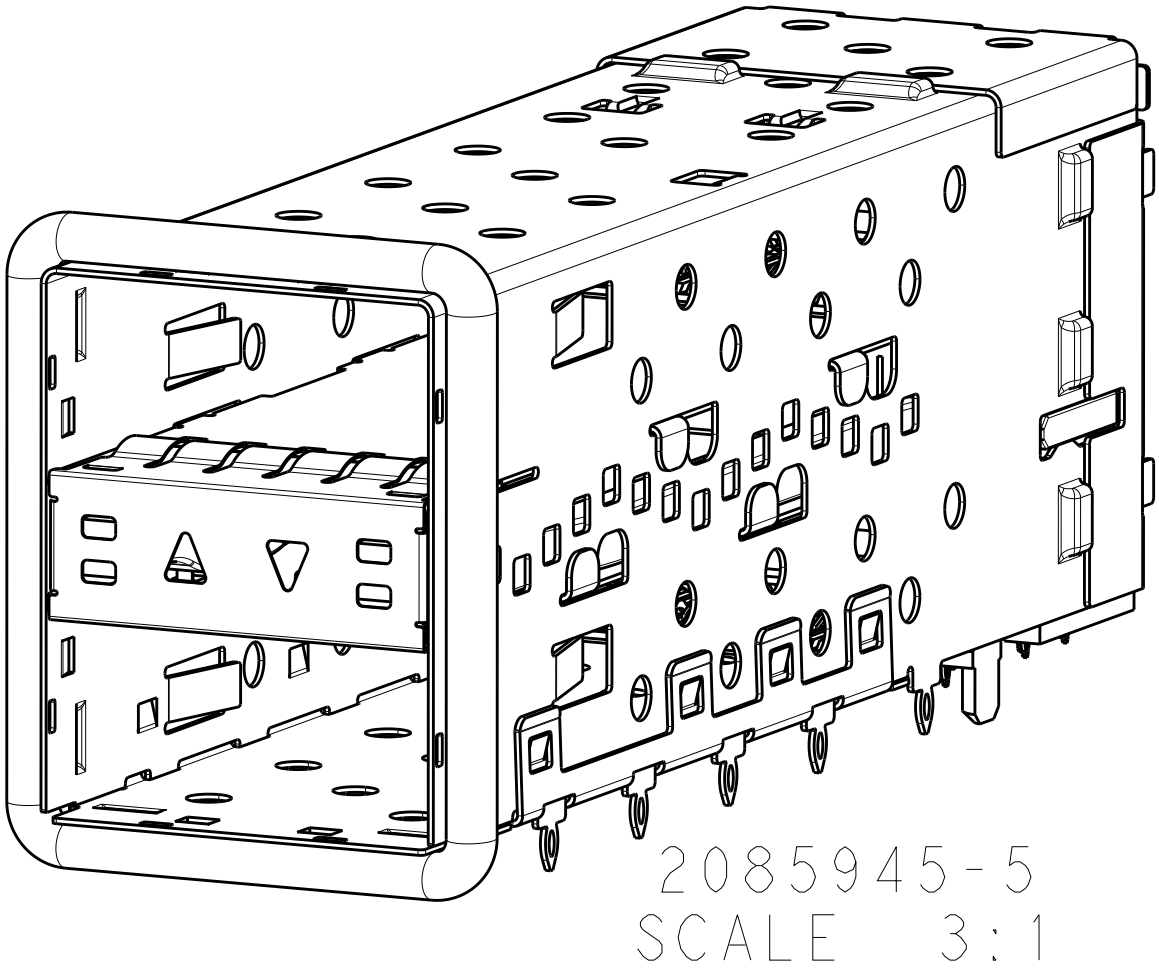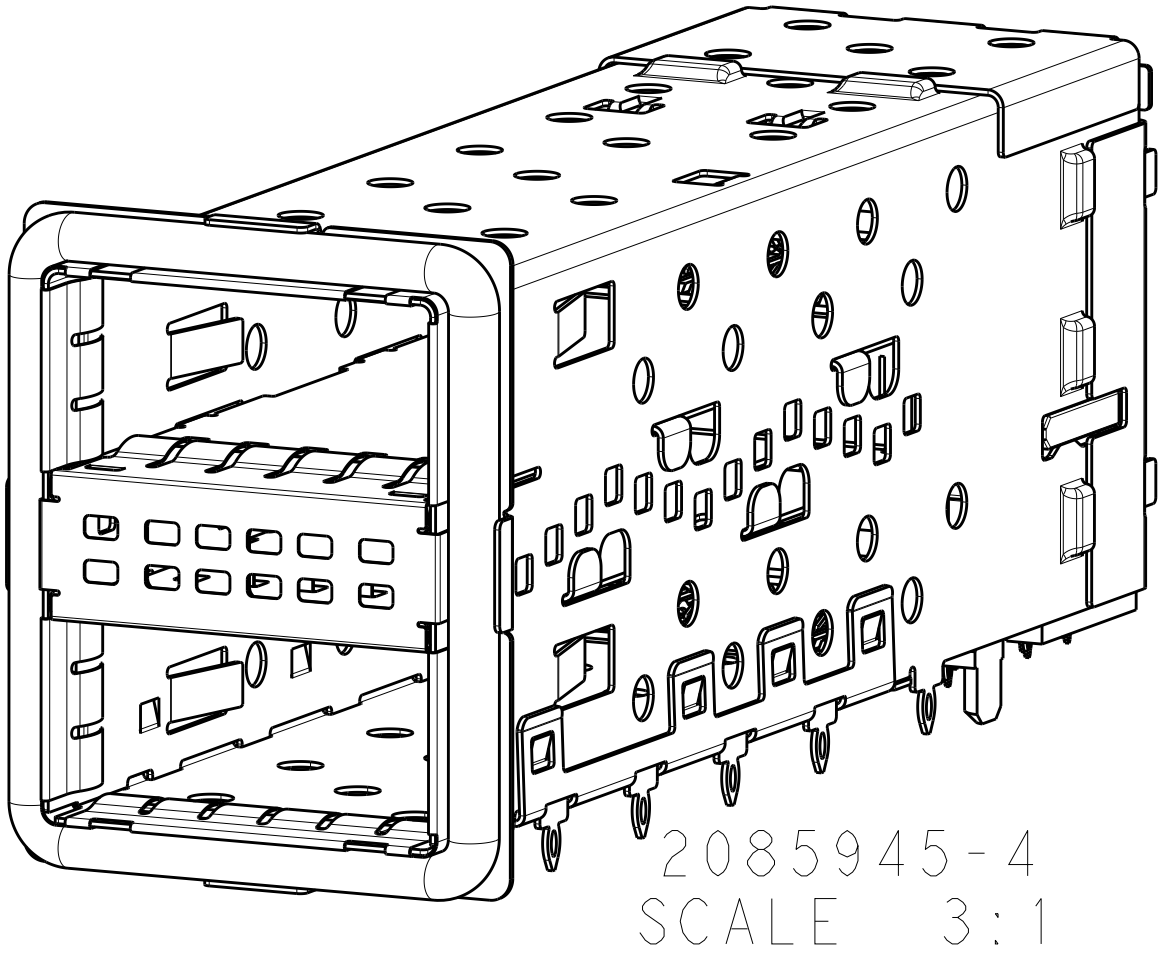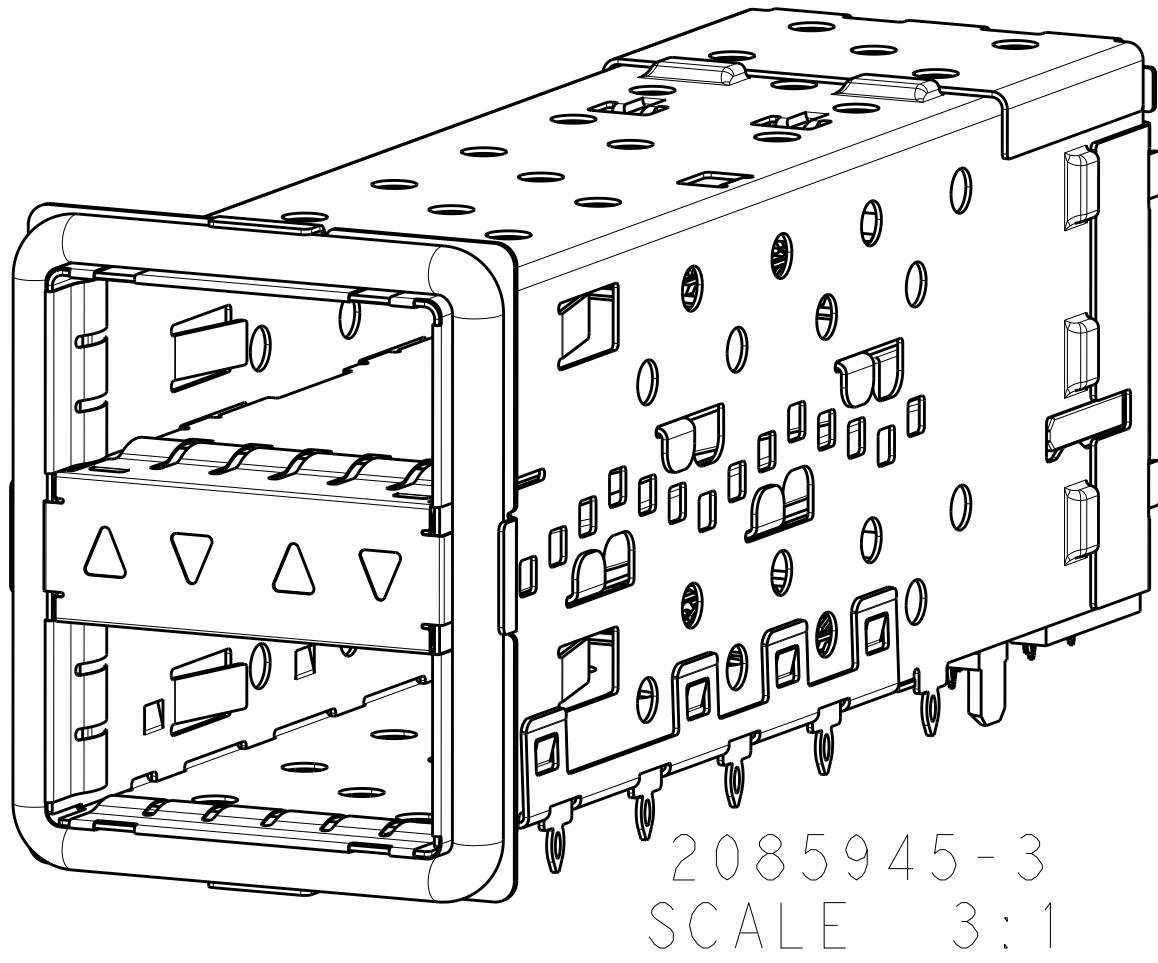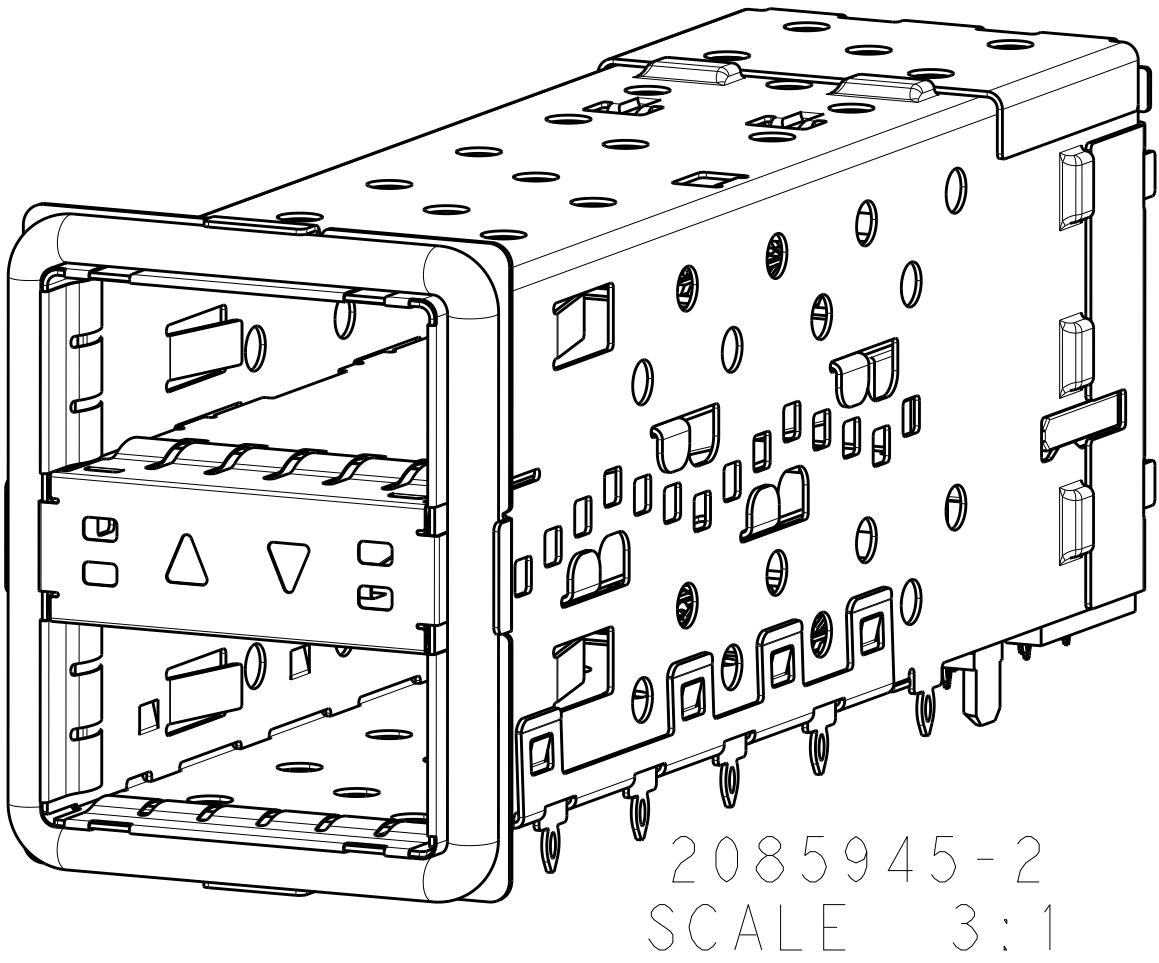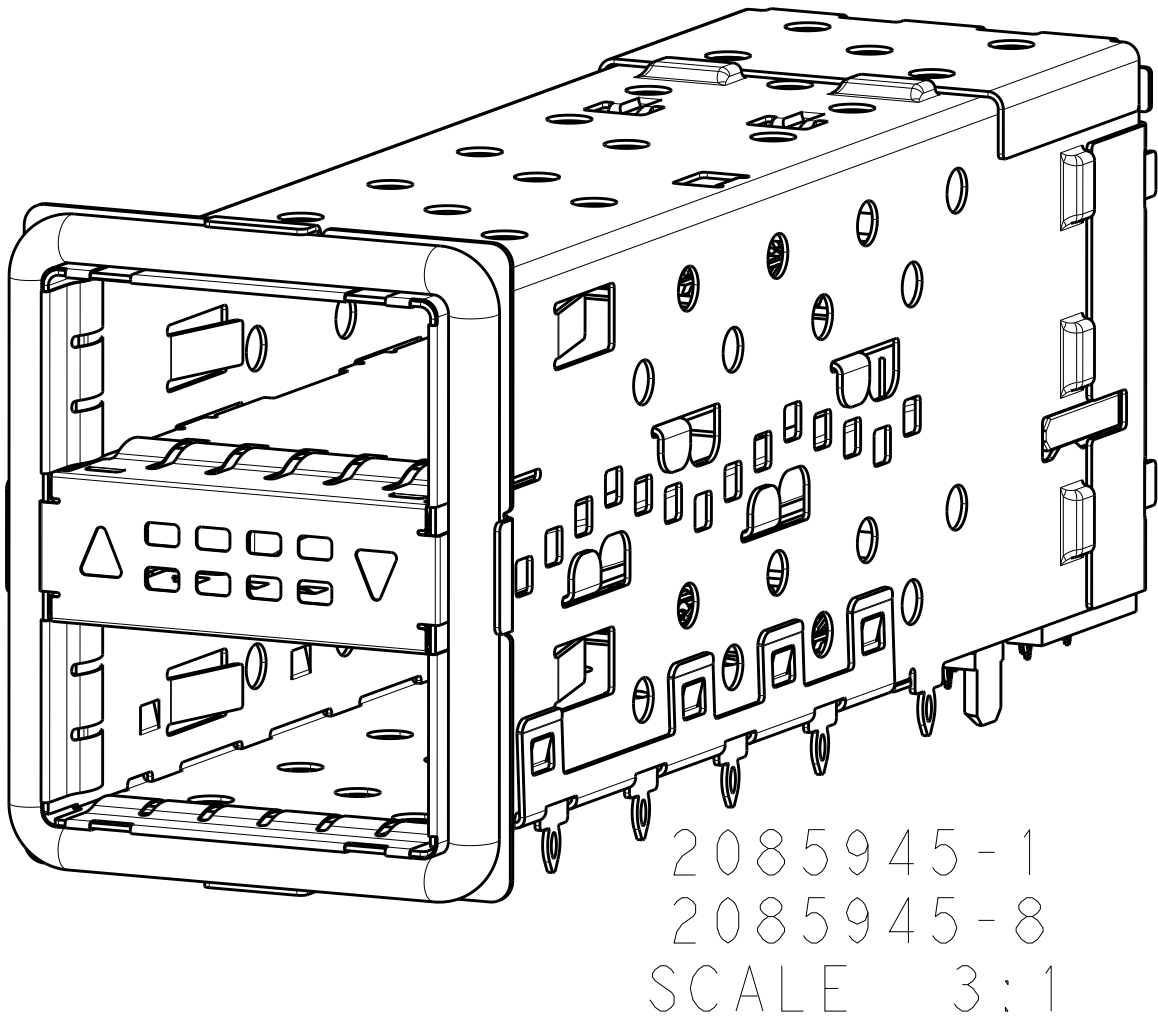

THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT
CONTACT PRODUCT ENGINEERING
BEFORE USING THIS PRINT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER 08AUG11	 TE Connectivity	
		CHK E. WICKES 08AUG11		
DIMENSIONS: mm		APVD F. WICKES 08AUG11	NAME CAGE AND PT CONNECTOR ASSEMBLY, WITH EMI GASKET, PRESS FIT, 2X1, STACKED QSFP+	
		PRODUCT SPEC 108-127010		
		APPLICATION SPEC 114-32020	SIZE A100779C=2085945	
		WEIGHT -		
MATERIAL		CUSTOMER DRAWING		
FINISH		RESTRICTED TO -		
		SCALE 4:1 SHEET 4 OF 4 REV 10		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.