


Photomicrosensor (Transmissive) EE-SX3239-P2


■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

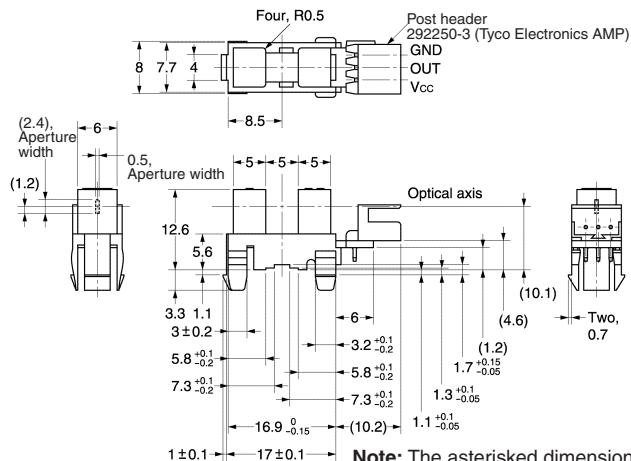

Note: The asterisked dimension is specified by datum A only.

Internal Circuit



Unless otherwise specified, the tolerances are as shown below.

Terminal No.	Name
V	Power supply (Vcc)
O	Output (OUT)
G	Ground (GND)

Dimensions	Tolerance
3 mm max.	± 0.3
$3 < \text{mm} \leq 6$	± 0.375
$6 < \text{mm} \leq 10$	± 0.45
$10 < \text{mm} \leq 18$	± 0.55
$18 < \text{mm} \leq 30$	± 0.65

Recommended Mating Connectors:

Tyco Electronics AMP 175778-3 (crimp connector)
173977-3 (press-fit connector)
179228-3 (crimp connector)

■ Features

- Snap-in mounting model.
- Mounts to 1.0-, 1.2- and 1.6-mm-thick panels.
- High resolution with a 0.5-mm-wide sensing aperture.
- With a 5-mm-wide slot.
- Photo IC output signals directly connect with C-MOS and TTL.
- Connects to Tyco Electronics AMP's CT-series connectors.
- RoHS Compliant.

■ Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Rated value
Power supply voltage		V_{CC}	7 V
Output voltage		V_{OUT}	28 V
Output current		I_{OUT}	16 mA
Permissible output dissipation		P_{OUT}	250 mW (see note)
Ambient temperature	Operating	T_{opr}	−20°C to 75°C
	Storage	T_{stg}	−40°C to 85°C
Soldering temperature		T_{sol}	---

Note: Refer to the temperature rating chart if the ambient temperature exceeds 25°C.


■ Ordering Information

Description		Model
Photomicrosensor (transmissive)	Dark ON	EE-SX3239-P2

■ Electrical and Optical Characteristics (Ta = 25°C, V_{CC} = 5 V ±10%)


Item	Symbol	Value	Condition
Current consumption	I_{CC}	16.5 mA max.	With and without incident
Low-level output voltage	V_{OL}	0.35 V max.	$I_{OUT} = 16$ mA without incident (EE-SX3239-P2)
High-level output voltage	V_{OH}	$(V_{CC} \times 0.9)$ V min.	$V_{OUT} = V_{CC}$ with incident (EE-SX3239-P2), $R_L = 47$ k Ω
Response frequency	f	3 kHz min.	$V_{OUT} = V_{CC}$, $R_L = 47$ k Ω (see note)

Note: The value of the response frequency is measured by rotating the disk as shown below.

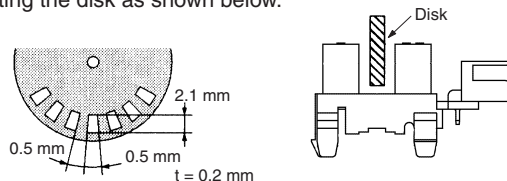


■ Engineering Data


Output Allowable Dissipation vs. Ambient Temperature Characteristics

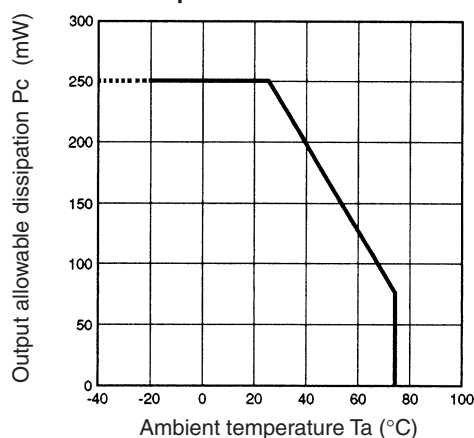


Sensing Position Characteristics (Typical)

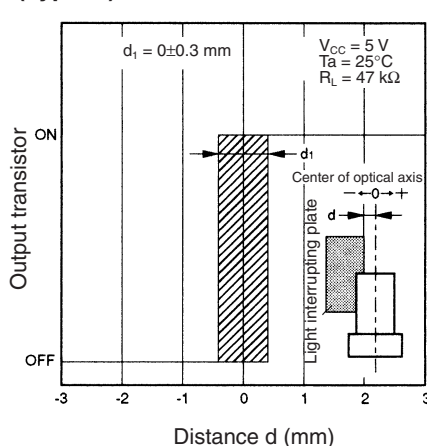


Sensing Position Characteristics (Typical)

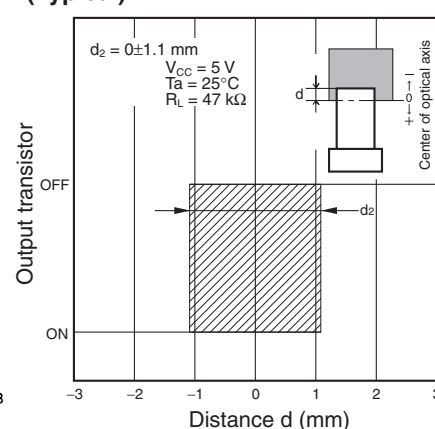

■ Recommended Mounting Holes

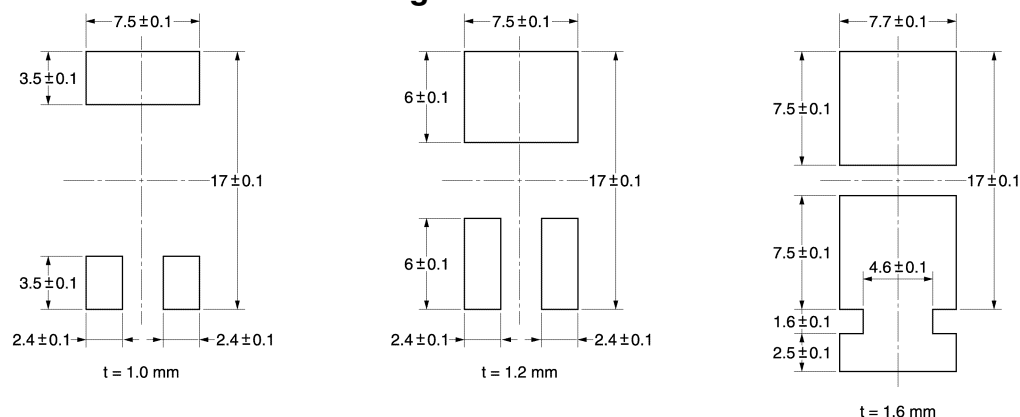

- When mounting the Photomicrosensor to a panel with a hole opened by pressing, make sure that the hole has no burrs. The mounting strength of the Photomicrosensor will decrease if the hole has burrs.
- When mounting the Photomicrosensor to a panel with a hole opened by pressing, be sure to mount the Photomicrosensor on the pressing side of the panel.
- The mounting strength of the Photomicrosensor will increase if the Photomicrosensor is mounted to a panel with a hole that is only a little larger than the size of the Photomicrosensor, in which case, however, it will be difficult to mount the Photomicrosensor to the panel. The mounting strength of the Photomicrosensor will decrease if the Photomicrosensor is mounted to a panel with a hole that is comparatively larger than the size of the Photomicrosensor, in which case, however, it will be easy to mount the Photomicrosensor to the panel. When mounting the Photomicrosensor to a panel, open an appropriate hole for the Photomicrosensor according to the application.
- After mounting the Photomicrosensor to any panel, make sure that the Photomicrosensor does not wobble.
- When mounting the Photomicrosensor to a molding with a hole, make sure that the edges of the hole are sharp enough, otherwise the Photomicrosensor may fall out.

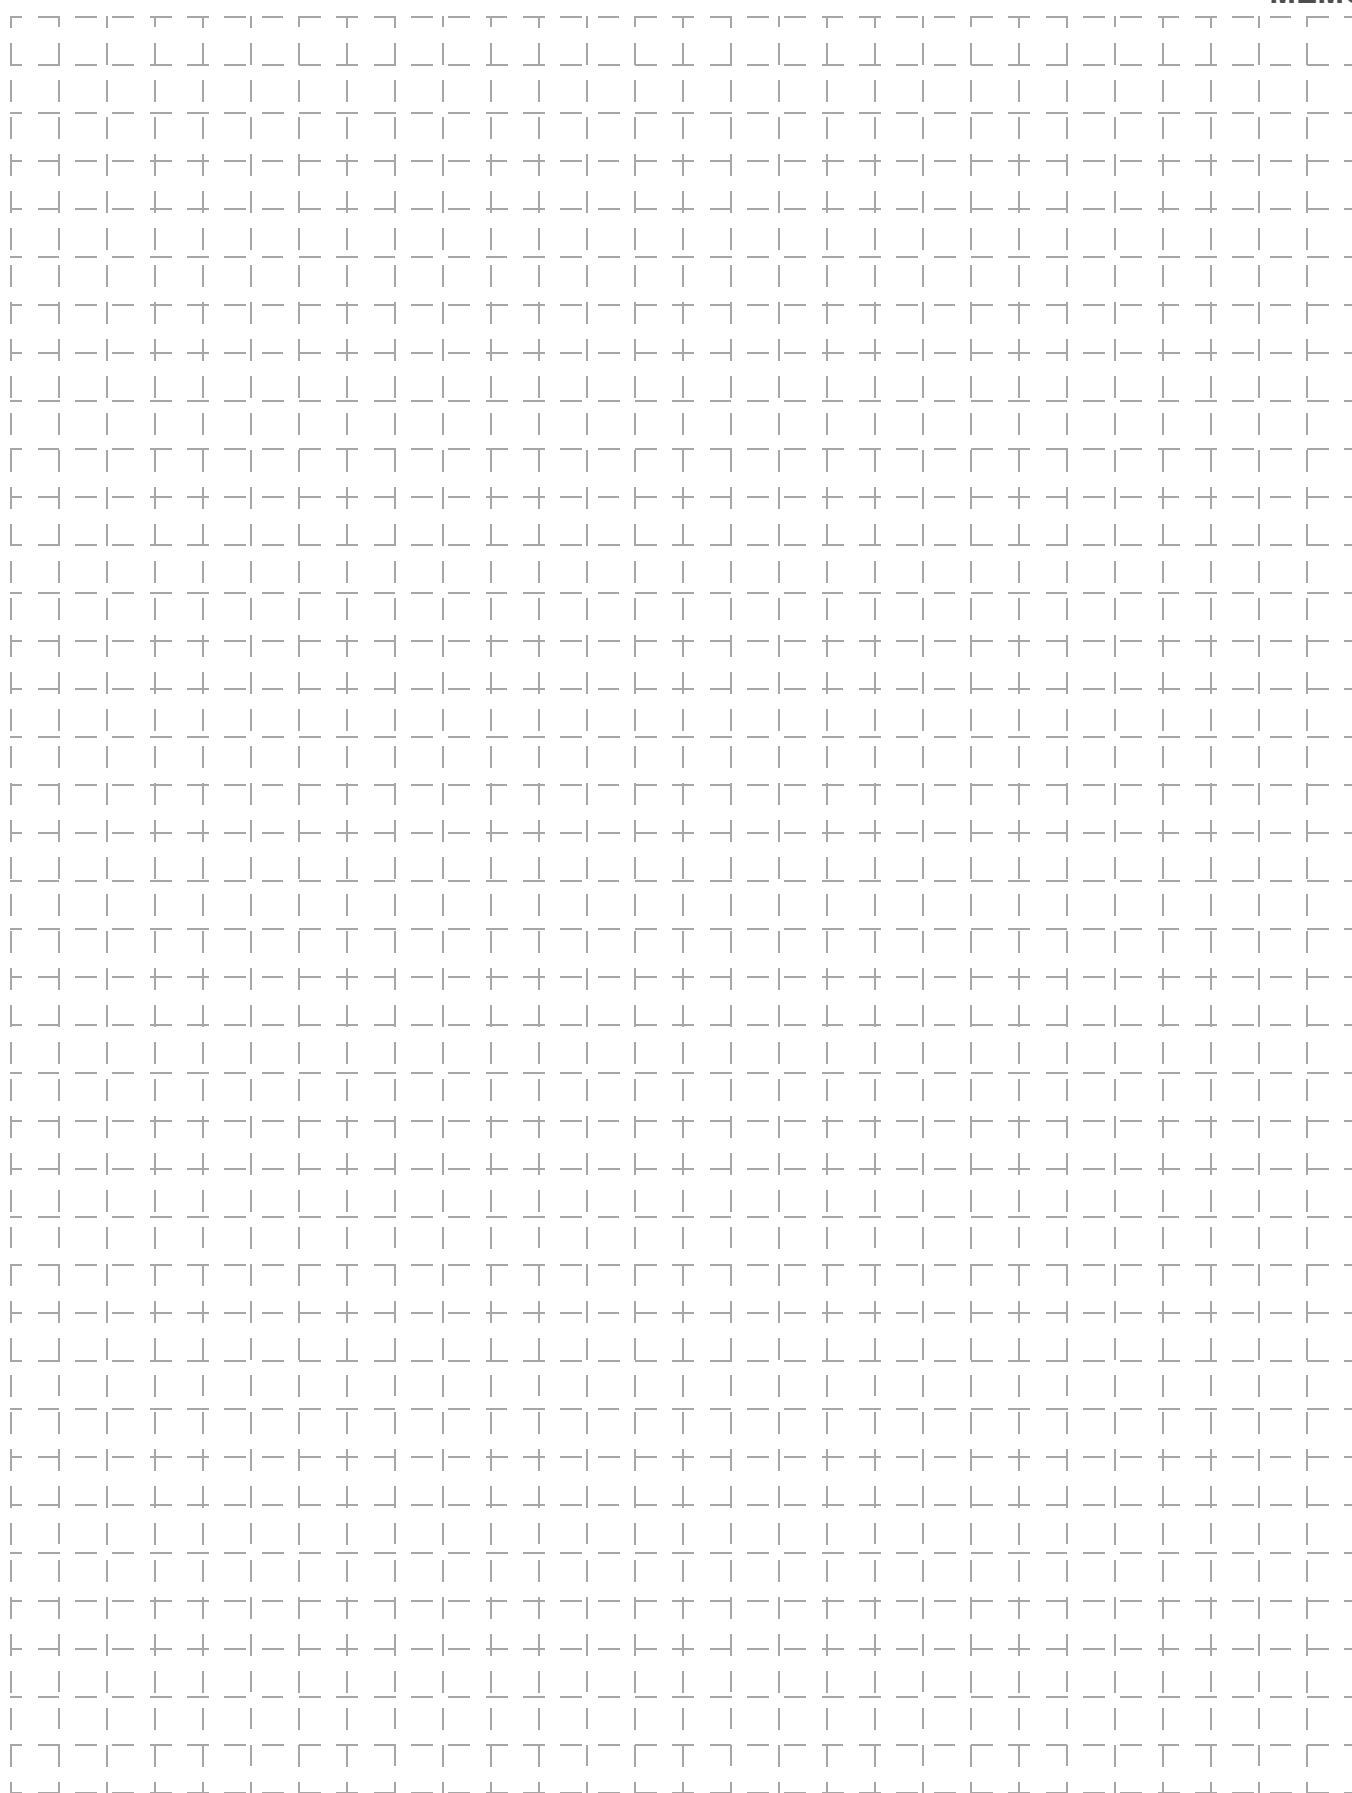

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.