

UST500-517-FL

Fanless Embedded System with 7th/6th Gen Intel® Core™, Pentium® and Celeron® Processor for Railway and Vehicle PC

Features

- CE, FCC certified; EN 50155, ISO 7637-2 compliant
- 7th/6th gen Intel® Core™ & Pentium® processors (LGA1151 up to 65W) with Intel® Q170
- Fanless and Wide operating temperatures from -40°C to +70°C
- Flexible LAN selection, up to 16 RJ-45 GbE PoE LAN ports
- 24 VDC power input
- Intelligent solution of vehicle power management (ACC ignition)
- Convenient and Accessible Storage, two/four 2.5" SATA drive, 1 mSATA



Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty steel, supports up to IP40**
CPU (LGA1151 socket type)	7th gen Intel® Kaby Lake processor, TDP: 35 - 65W 6th gen Intel® Skylake processor, TDP: 35 - 65W
Chipset	Intel® Q170
System Memory	2 x DDR4-1866/2133/2400 SO-DIMM, up to 32GB
BIOS	AMI
TPM	TPM 2.0 (optional)
System I/O Outlet	Serial Display Audio Ethernet USB DIO Others
Expansion Interface	2 x Full-size Rev.1.2 PCI Express Mini Card slot: • 2 x USB/PCIe with external SIM socket 2 x Half-size Rev.1.2 PCI Express Mini Card slot: • 1 x mSATA/USB/PCIe • 1 x USB
Storage	SATA Drive mSATA



Watchdog Timer	255 levels, 1 to 255 sec.
Power in	Power Supply Power Consumption
PoE (PSE, Power Sourcing Equipment)	PoE Performance Up to 16 x RJ-45/8 x RJ-45 & 8 x M12 PoE output max. 200W supports PoE & PoE+ • PoE (802.3af 15.4W/port) • PoE+ (802.3at 30W/port)
System Indicator	1 x LED indicator for SATA drive activity 1 x LED indicator for power 2 x Programmable
Operating Temperature	-40°C to +70°C (-40°F to +158°F) with W.T. peripheral*
Humidity	0% to 95%, non-condensing
Dimensions	2 internal SATA SKU: 280 mm (11.02") (W) x 210.5 mm (8.27") (D) x 70 mm (2.76") (H)* 2 swappable SATA SKU: 280 mm (11.02") (W) x 210.5 mm (8.27") (D) x 83.7 mm (3.30") (H)* 4 swappable SATA SKU: 280 mm (11.02") (W) x 210.5 mm (8.27") (D) x 99.2 mm (3.91") (H)* *Without wall mount
Mounting	Wall mount
Weight (net/gross)	2 internal SATA SKU: 3.95 kg (8.71 lb)/4.97 kg (10.96 lb) 2 swappable SATA SKU: 4.92 kg (10.85 lb)/5.74 kg (12.65 lb) 4 swappable SATA SKU: 4.92 kg (10.85 lb)/5.74 kg (12.65 lb)
Certifications	CE (Class A), FCC (Class A) certified; EN 50155, ISO 7637-2 compliant
EMC	CE/FCC EN 55032 (Class A), EN 55024, FCC part 15 B (Class A) EN 50155 EN 50121-3-2, IEC 62236-3-2
Vibration Endurance	3 Grms w/ SSD (5 to 500Hz, X/Y/Z direction; random, operating) 1 Grms w/ HDD (5 to 150Hz, X/Y/Z direction; random, operating) 2 Grms w/ HDD & Anti-Vibration Kit (5 to 500Hz, X/Y/Z direction; random, operating) MIL-STD-810G, Method 514.6C-VI Category 4 compliant EN 50155 EN (IEC) 61373 category 1 class B
Shock	EN 50155 EN (IEC) 61373 category 1 class B, Half-sine pulse, 5g, 30ms (longitudinal direction), 3g, 30ms (vertical/transverse direction)
EOS Support	Windows® 10 64-bit, Windows® 7 64/32-bit (for 6th gen Intel CPU), Ubuntu 16.04
Software Support	AMS.AXView

*Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

**Please refer the IP rating in ordering information

Ordering Information

System	
UST500-517-FL-16RJ/8RJ8M12/8M12-4SATA-TDC (P/N: E274500100) for 16 x RJ-45 LAN (P/N: E274500101) for 8 x RJ-45 8 x M12 LAN (P/N: E274500102) for 8 x M12 LAN	Fanless embedded IP40-rated system with 6/7th gen Intel® desktop processor (LGA1151), Q170, VGA, DVI-D, HDMI, 6-in/2-out DIO, 2 COM, 4 USB 3.0, 16 RJ-45/8 RJ-45, 8 M12/8 M12 PoE GbE LAN, 4 SATA drive and ACC ignition <i>4 Swappable SATA Drive SKUs</i>
UST500-517-FL-8RJ-2SATA-TDC (P/N: E274500103) for 8 x RJ45 LAN	Fanless embedded IP40-rated system with 6/7th gen Intel® desktop processor (LGA1151), Q170, VGA, DVI-D, HDMI, 6-in/2-out DIO, 2 COM, 4 USB 3.0, 8 RJ-45/16 RJ-45 PoE GbE LAN, 2 internal SATA drive and ACC ignition <i>2 Internal SATA Drive SKUs</i>
UST500-517-FL-16RJ/8RJ-2SATA-TRAY-TDC (P/N: E274500104) for 16 x RJ-45 LAN (P/N: E274500105) for 8 x RJ-45 LAN	Fanless embedded IP30-rated system with 6/7th gen Intel® desktop processor (LGA1151), Q170, VGA, DVI-D, HDMI, 6-in/2-out DIO, 2 COM, 4 USB 3.0, 8 RJ-45/16 RJ-45 PoE GbE LAN, 2 swappable SATA drive and ACC ignition <i>2 Swappable SATA Drive SKUs</i>


Optional	
Anti-vibration Kit (P/N: 8816N5008A0E)	For in-vehicle/rolling stock which improves HDD stability in NVR applications 
Communication Modules	8816N3239A0E 3G UC20GKit for tBOX/UST (3G ANT) (E) 8816N3235A0E 3G/GPS UC20GKit for tBOX (3G/GPS ANT) 8816K6603A0E AMPAK AP12356 Wi-Fi kit (E) 8816N5003A0E AP12356 w/WT Wi-Fi kit for tBOX/UST SFP (E) 881745001A0E GPS Kit M8N w/o adapter for tBOX/UST SFP (E) 88160620BA0E LTE SIMCOM SIM7100 (EU) for tBOX/UST SFP (E) 881745000A0E LTE+GPS SIM7100EU kit for tBOX/UST SFP (E) 8816N5000A0E LTE SIM7100JC kit for tBOX500, JPN SFP (E) 8816N5006A0E LTE+GPS SIM7100 (JPE) kit tBOX (30) SFP (E) 8816N5004A0E LTE+GPS SIM7100C (TWN) kit tBOX (30) SFP (E) 50906D24000E Adapter 24V/120W, wire only, FSP120-AAAN3
AC to DC Adapter	

*Specifications and certifications may vary based on different requirements.

Power Protection

OCP (over current protection)
 OVP (over voltage protection)
 UVP (under voltage protection)
 RPP (reverse polarity protection)
 ISO 7637-2 pulse 1, 2a, 2b, 3a, 3b, 4 (vehicle version)
 Setting for in-vehicle battery protection: system will be automatically turned down at low voltage level
 Setting for ignition control: system will activate a counter while in-vehicle battery at low voltage, ACC-ON delay and shut down delay

Dimensions

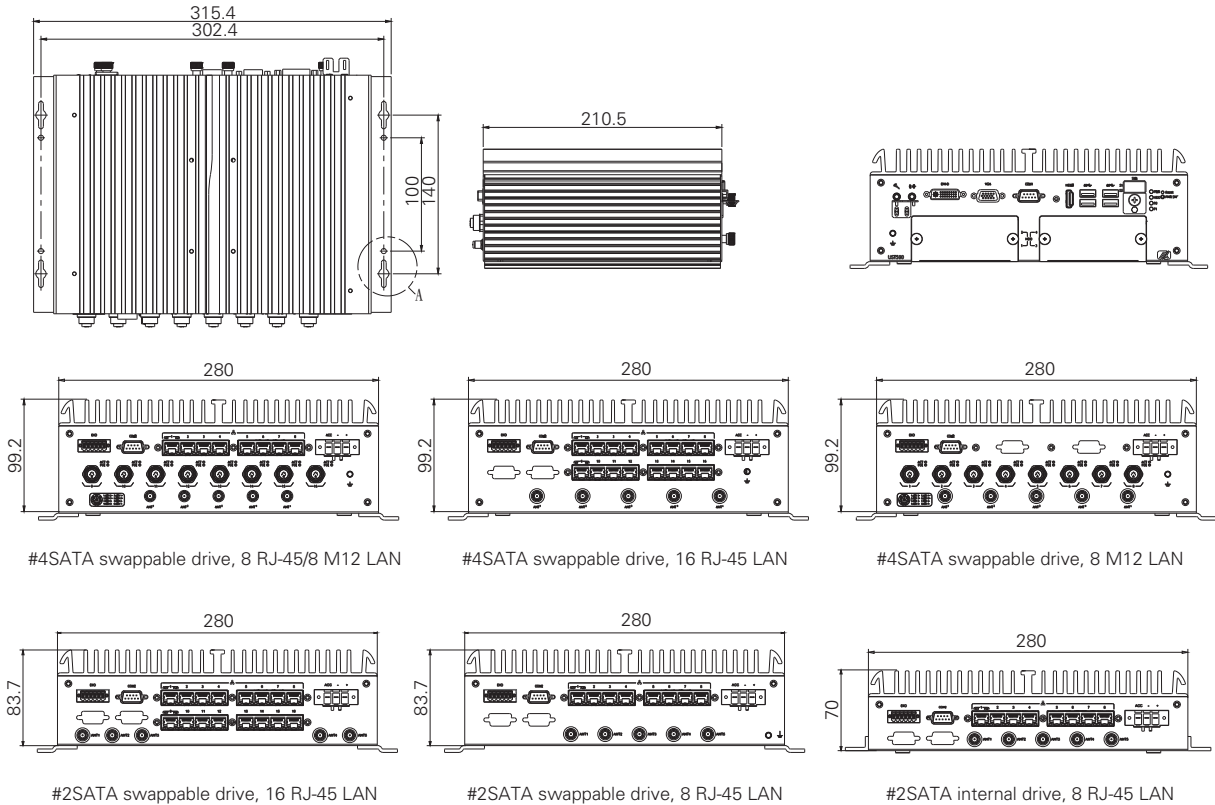



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.