



## FAST CMOS OCTAL TRANSPARENT LATCH

**IDT54/74FCT573T/AT/CT**


### FEATURES:

- Std., A, and C grades
- Low input and output leakage  $\leq 1\mu\text{A}$  (max.)
- CMOS power levels
- True TTL input and output compatibility:
  - $V_{OH} = 3.3V$  (typ.)
  - $V_{OL} = 0.3V$  (typ.)
- High Drive outputs (-15mA  $I_{OH}$ , 48mA  $I_{OL}$ )
- Meets or exceeds JEDEC standard 18 specifications
- Military product compliant to MIL-STD-883, Class B and DESC listed (dual marked)
- Power off disable outputs permit "live insertion"
- Available in the following packages:
  - Industrial: SOIC, QSOP
  - Military: CERDIP, LCC


### DESCRIPTION:

The FCT573T is an octal transparent latch built using an advanced dual metal CMOS technology. These octal latches have 3-state outputs and are intended for bus oriented applications. The flip-flops appear transparent to the data when Latch Enable (LE) is high. When LE is low, the data that meets the set-up time is latched. Data appears on the bus when the Output Enable ( $\overline{OE}$ ) is low. When  $\overline{OE}$  is high, the bus output is in the high-impedance state.


### FUNCTIONAL BLOCK DIAGRAM

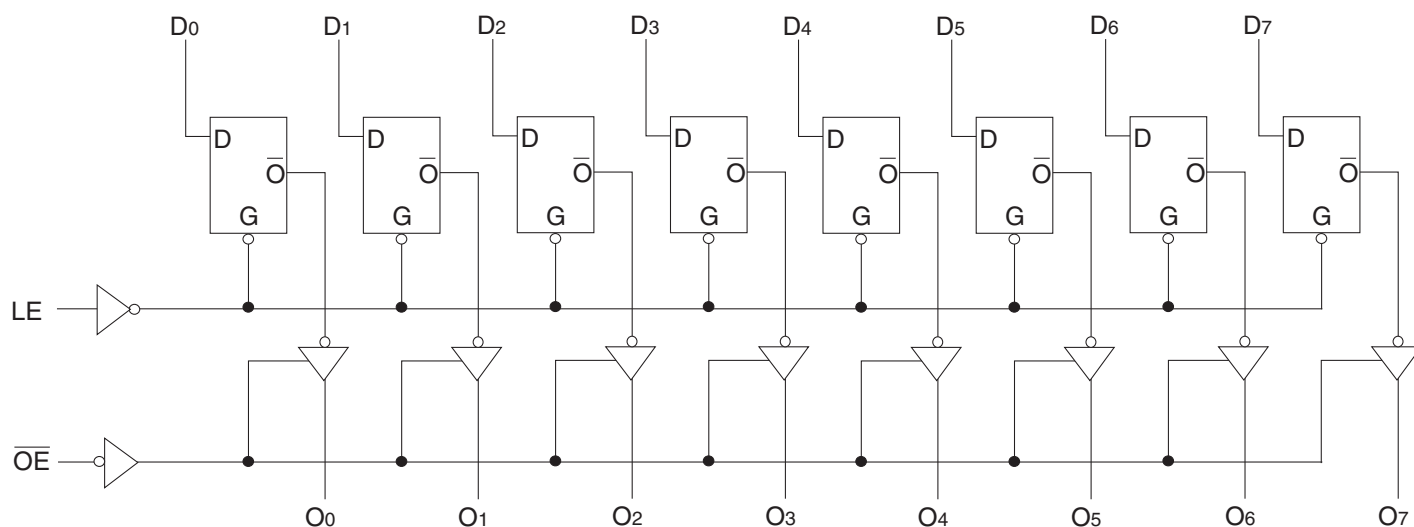

## PIN CONFIGURATION

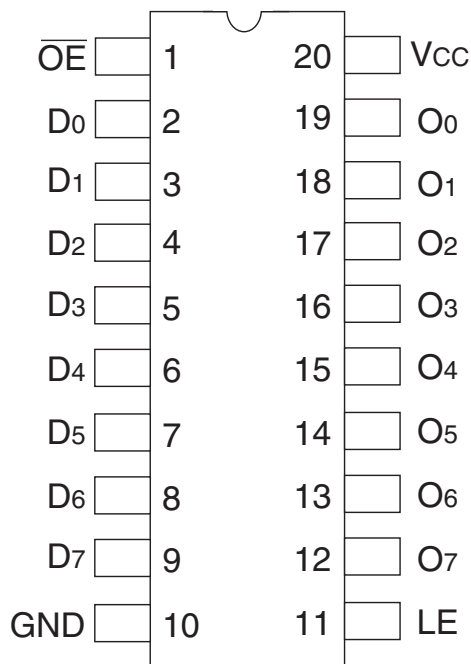

CERDIP/ SOIC/ QSOP  
TOP VIEW

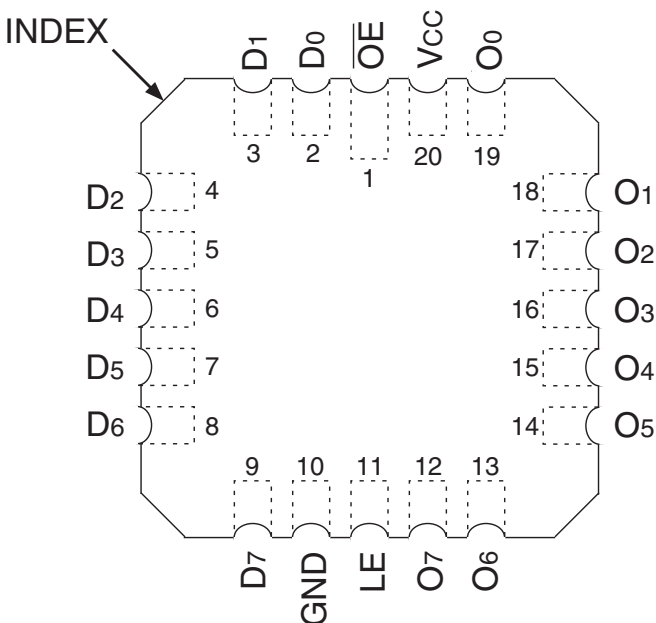

LCC  
TOP VIEW

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol                           | Description                          | Max                          | Unit |
|----------------------------------|--------------------------------------|------------------------------|------|
| V <sub>TERM</sub> <sup>(2)</sup> | Terminal Voltage with Respect to GND | -0.5 to +7                   | V    |
| V <sub>TERM</sub> <sup>(3)</sup> | Terminal Voltage with Respect to GND | -0.5 to V <sub>CC</sub> +0.5 | V    |
| T <sub>STG</sub>                 | Storage Temperature                  | -65 to +150                  | °C   |
| I <sub>OUT</sub>                 | DC Output Current                    | -60 to +120                  | mA   |

### NOTES:

1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability. No terminal voltage may exceed V<sub>CC</sub> by +0.5V unless otherwise noted.
2. Inputs and V<sub>CC</sub> terminals only.
3. Output and I/O terminals only.

## CAPACITANCE (T<sub>A</sub> = +25°C, F = 1.0MHz)

| Symbol           | Parameter <sup>(1)</sup> | Conditions            | Typ. | Max. | Unit |
|------------------|--------------------------|-----------------------|------|------|------|
| C <sub>IN</sub>  | Input Capacitance        | V <sub>IN</sub> = 0V  | 6    | 10   | pF   |
| C <sub>OUT</sub> | Output Capacitance       | V <sub>OUT</sub> = 0V | 8    | 12   | pF   |

### NOTE:

1. This parameter is measured at characterization but not tested.

## PIN DESCRIPTION

| Pin Names       | Description                      |
|-----------------|----------------------------------|
| Dx              | Data Inputs                      |
| LE              | Latch Enable Input (Active HIGH) |
| $\overline{OE}$ | Output Enable Input (Active LOW) |
| Ox              | 3-State Outputs                  |

## FUNCTION TABLE<sup>(1)</sup>

| Inputs |    |                 | Outputs |
|--------|----|-----------------|---------|
| Dx     | LE | $\overline{OE}$ | Ox      |
| H      | H  | L               | H       |
| L      | H  | L               | L       |
| X      | X  | H               | Z       |

### NOTE:

1. H = HIGH Voltage Level  
X = Don't Care  
L = LOW Voltage Level  
Z = High Impedance

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Industrial:  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{V} \pm 5\%$ ; Military:  $T_A = -55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{V} \pm 10\%$

| Symbol    | Parameter                                                             | Test Conditions <sup>(1)</sup>                         |                     | Min. | Typ. <sup>(2)</sup> | Max.    | Unit          |
|-----------|-----------------------------------------------------------------------|--------------------------------------------------------|---------------------|------|---------------------|---------|---------------|
| $V_{IH}$  | Input HIGH Level                                                      | Guaranteed Logic HIGH Level                            |                     | 2    | —                   | —       | V             |
| $V_{IL}$  | Input LOW Level                                                       | Guaranteed Logic LOW Level                             |                     | —    | —                   | 0.8     | V             |
| $I_{IH}$  | Input HIGH Current <sup>(4)</sup>                                     | $V_{CC} = \text{Max.}$                                 | $V_I = 2.7\text{V}$ | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{IL}$  | Input LOW Current <sup>(4)</sup>                                      | $V_{CC} = \text{Max.}$                                 | $V_I = 0.5\text{V}$ | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{OZH}$ | High Impedance Output Current<br>(3-State output pins) <sup>(4)</sup> | $V_{CC} = \text{Max.}$                                 | $V_O = 2.7\text{V}$ | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{OZL}$ |                                                                       |                                                        | $V_O = 0.5\text{V}$ | —    | —                   | $\pm 1$ |               |
| $I_I$     | Input HIGH Current <sup>(4)</sup>                                     | $V_{CC} = \text{Max.}, V_I = V_{CC} (\text{Max.})$     |                     | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $V_{IK}$  | Clamp Diode Voltage                                                   | $V_{CC} = \text{Min.}, I_{IN} = -18\text{mA}$          |                     | —    | -0.7                | -1.2    | V             |
| $V_H$     | Input Hysteresis                                                      | —                                                      |                     | —    | 200                 | —       | mV            |
| $I_{CC}$  | Quiescent Power Supply Current                                        | $V_{CC} = \text{Max.}, V_{IN} = \text{GND or } V_{CC}$ |                     | —    | 0.01                | 1       | mA            |

## OUTPUT DRIVE CHARACTERISTICS

| Symbol    | Parameter                                     | Test Conditions <sup>(1)</sup>                                 |                                                            | Min. | Typ. <sup>(2)</sup> | Max.    | Unit          |
|-----------|-----------------------------------------------|----------------------------------------------------------------|------------------------------------------------------------|------|---------------------|---------|---------------|
| $V_{OH}$  | Output HIGH Voltage                           | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH} \text{ or } V_{IL}$ | $I_{OH} = -6\text{mA MIL}$                                 | 2.4  | 3.3                 | —       | V             |
|           |                                               |                                                                | $I_{OH} = -8\text{mA IND}$                                 | —    | —                   | —       |               |
|           |                                               |                                                                | $I_{OH} = -12\text{mA MIL}$<br>$I_{OH} = -15\text{mA IND}$ | 2    | 3                   | —       |               |
| $V_{OL}$  | Output LOW Voltage                            | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH} \text{ or } V_{IL}$ | $I_{OL} = 32\text{mA MIL}$<br>$I_{OL} = 48\text{mA IND}$   | —    | 0.3                 | 0.5     | V             |
| $I_{OS}$  | Short Circuit Current                         | $V_{CC} = \text{Max.}, V_O = \text{GND}^{(3)}$                 |                                                            | -60  | -120                | -225    | mA            |
| $I_{OFF}$ | Input/Output Power Off Leakage <sup>(5)</sup> | $V_{CC} = 0\text{V}, V_{IN} \text{ or } V_O \leq 4.5\text{V}$  |                                                            | —    | —                   | $\pm 1$ | $\mu\text{A}$ |

### NOTES:

- For conditions shown as Min. or Max., use appropriate value specified under Electrical Characteristics for the applicable device type.
- Typical values are at  $V_{CC} = 5.0\text{V}$ ,  $+25^{\circ}\text{C}$  ambient.
- Not more than one output should be tested at one time. Duration of the test should not exceed one second.
- The test limit for this parameter is  $\pm 5\mu\text{A}$  at  $T_A = -55^{\circ}\text{C}$ .
- This parameter is guaranteed but not tested.

## POWER SUPPLY CHARACTERISTICS

| Symbol          | Parameter                                         | Test Conditions <sup>(1)</sup>                                                                                                                            |                                            | Min. | Typ. <sup>(2)</sup> | Max.              | Unit       |
|-----------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------|---------------------|-------------------|------------|
| $\Delta I_{CC}$ | Quiescent Power Supply Current<br>TTL Inputs HIGH | $V_{CC} = \text{Max.}$<br>$V_{IN} = 3.4V^{(3)}$                                                                                                           |                                            | —    | 0.5                 | 2                 | mA         |
| $I_{CCD}$       | Dynamic Power Supply<br>Current <sup>(4)</sup>    | $V_{CC} = \text{Max.}$<br>Outputs Open<br>$\overline{OE} = \text{GND}$<br>One Input Toggling<br>50% Duty Cycle                                            | $V_{IN} = V_{CC}$<br>$V_{IN} = \text{GND}$ | —    | 0.15                | 0.25              | mA/<br>MHz |
| $I_C$           | Total Power Supply Current <sup>(6)</sup>         | $V_{CC} = \text{Max.}$<br>Outputs Open<br>$f_i = 10\text{MHz}$<br>50% Duty Cycle<br>$\overline{OE} = \text{GND}$<br>$LE = V_{CC}$<br>One Bit Toggling     | $V_{IN} = V_{CC}$<br>$V_{IN} = \text{GND}$ | —    | 1.5                 | 3.5               | mA         |
|                 |                                                   |                                                                                                                                                           | $V_{IN} = 3.4V$<br>$V_{IN} = \text{GND}$   | —    | 1.8                 | 4.5               |            |
|                 |                                                   | $V_{CC} = \text{Max.}$<br>Outputs Open<br>$f_i = 2.5\text{MHz}$<br>50% Duty Cycle<br>$\overline{OE} = \text{GND}$<br>$LE = V_{CC}$<br>Eight Bits Toggling | $V_{IN} = V_{CC}$<br>$V_{IN} = \text{GND}$ | —    | 3                   | 6 <sup>(5)</sup>  | mA         |
|                 |                                                   |                                                                                                                                                           | $V_{IN} = 3.4V$<br>$V_{IN} = \text{GND}$   | —    | 5                   | 14 <sup>(5)</sup> |            |

### NOTES:

1. For conditions shown as Min. or Max., use appropriate value specified under Electrical Characteristics for the applicable device type.

2. Typical values are at  $V_{CC} = 5.0V$ ,  $+25^\circ\text{C}$  ambient.

3. Per TTL driven input; ( $V_{IN} = 3.4V$ ). All other inputs at  $V_{CC}$  or GND.

4. This parameter is not directly testable, but is derived for use in Total Power Supply Calculations.

5. Values for these conditions are examples of  $\Delta I_{CC}$  formula. These limits are guaranteed but not tested.

6.  $I_C = I_{QUIESCENT} + I_{INPUTS} + I_{DYNAMIC}$

$I_C = I_{CC} + \Delta I_{CC} D_H N_T + I_{CCD} (f_{CP}/2 + f_i N_i)$

$I_{CC} = \text{Quiescent Current}$

$\Delta I_{CC} = \text{Power Supply Current for a TTL High Input } (V_{IN} = 3.4V)$

$D_H = \text{Duty Cycle for TTL Inputs High}$

$N_T = \text{Number of TTL Inputs at } D_H$

$I_{CCD} = \text{Dynamic Current caused by an Input Transition Pair (HLH or LHL)}$

$f_{CP} = \text{Clock Frequency for Register Devices (Zero for Non-Register Devices)}$

$f_i = \text{Output Frequency}$

$N_i = \text{Number of Outputs at } f_i$

All currents are in milliamps and all frequencies are in megahertz.

## SWITCHING CHARACTERISTICS OVER OPERATING RANGE - INDUSTRIAL

| Symbol                               | Parameter                            | Condition <sup>(1)</sup>                       | 74FCT573AT          |      | 74FCT573CT          |      | Unit |
|--------------------------------------|--------------------------------------|------------------------------------------------|---------------------|------|---------------------|------|------|
|                                      |                                      |                                                | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. |      |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay<br>Dx to Ox        | C <sub>L</sub> = 50pF<br>R <sub>L</sub> = 500Ω | 1.5                 | 5.2  | 1.5                 | 4.2  | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay<br>LE to Ox        |                                                | 2                   | 8.5  | 2                   | 5.5  | ns   |
| t <sub>PZH</sub><br>t <sub>PZL</sub> | Output Enable Time                   |                                                | 1.5                 | 6.5  | 1.5                 | 5.5  | ns   |
| t <sub>PHZ</sub><br>t <sub>PLZ</sub> | Output Disable Time                  |                                                | 1.5                 | 5.5  | 1.5                 | 5    | ns   |
| t <sub>SU</sub>                      | Set-up Time, HIGH or LOW<br>Dx to LE |                                                | 2                   | —    | 2                   | —    | ns   |
| t <sub>H</sub>                       | Hold Time, HIGH or LOW<br>Dx to LE   |                                                | 1.5                 | —    | 1.5                 | —    | ns   |
| t <sub>W</sub>                       | LE Pulse Width HIGH <sup>(3)</sup>   |                                                | 5                   | —    | 5                   | —    | ns   |


## SWITCHING CHARACTERISTICS OVER OPERATING RANGE - MILITARY

| Symbol                               | Parameter                            | Condition <sup>(1)</sup>                       | 54FCT573T           |      | 54FCT573AT          |      | 54FCT573CT          |      | Unit |
|--------------------------------------|--------------------------------------|------------------------------------------------|---------------------|------|---------------------|------|---------------------|------|------|
|                                      |                                      |                                                | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. |      |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay<br>Dx to Ox        | C <sub>L</sub> = 50pF<br>R <sub>L</sub> = 500Ω | 1.5                 | 8.5  | 1.5                 | 5.6  | 1.5                 | 5.1  | ns   |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay<br>LE to Ox        |                                                | 2                   | 15   | 2                   | 9.8  | 2                   | 8    | ns   |
| t <sub>PZH</sub><br>t <sub>PZL</sub> | Output Enable Time                   |                                                | 1.5                 | 13.5 | 1.5                 | 7.5  | 1.5                 | 6.3  | ns   |
| t <sub>PHZ</sub><br>t <sub>PLZ</sub> | Output Disable Time                  |                                                | 1.5                 | 10   | 1.5                 | 6.5  | 1.5                 | 5.9  | ns   |
| t <sub>SU</sub>                      | Set-up Time, HIGH or LOW<br>Dx to LE |                                                | 2                   | —    | 2                   | —    | 2                   | —    | ns   |
| t <sub>H</sub>                       | Hold Time, HIGH or LOW<br>Dx to LE   |                                                | 1.5                 | —    | 1.5                 | —    | 1.5                 | —    | ns   |
| t <sub>W</sub>                       | LE Pulse Width HIGH <sup>(3)</sup>   |                                                | 6                   | —    | 6                   | —    | 6                   | —    | ns   |

### NOTES:


1. See test circuit and waveforms.
2. Minimum limits are guaranteed but not tested on Propagation Delays.
3. This limit is guaranteed but not tested.

## TEST CIRCUITS AND WAVEFORMS

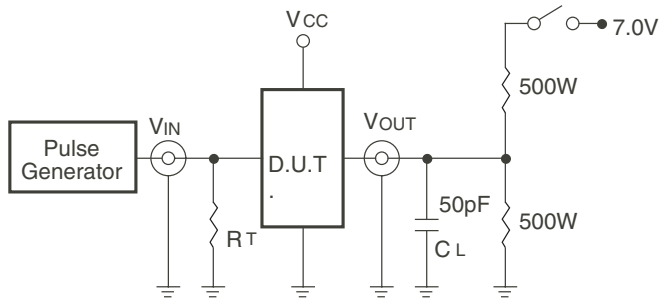


Octal Link

Test Circuits for All Outputs

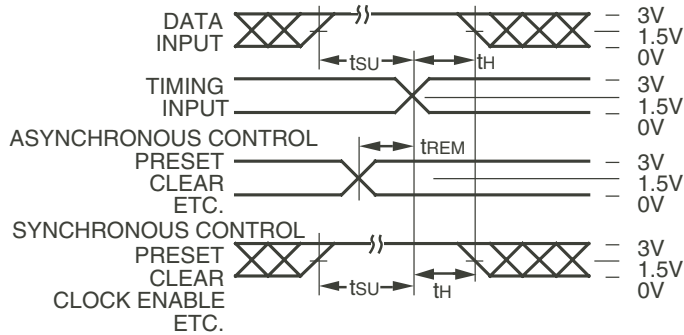

Octal Link

Set-Up, Hold, and Release Times

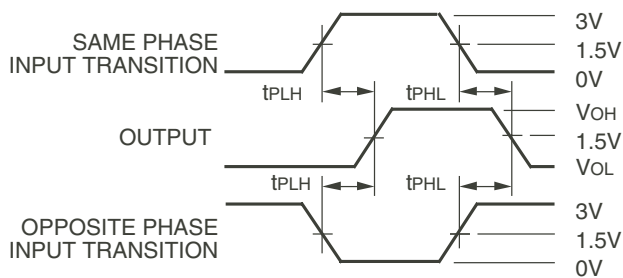

Octal Link

Propagation Delay


## SWITCH POSITION

| Test                                    | Switch |
|-----------------------------------------|--------|
| Open Drain<br>Disable Low<br>Enable Low | Closed |
| All Other Tests                         | Open   |

### DEFINITIONS:


CL = Load capacitance: includes jig and probe capacitance.

RT = Termination resistance: should be equal to ZOUT of the Pulse Generator.

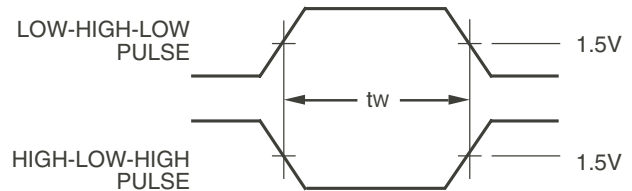

Pulse Width

Octal Link

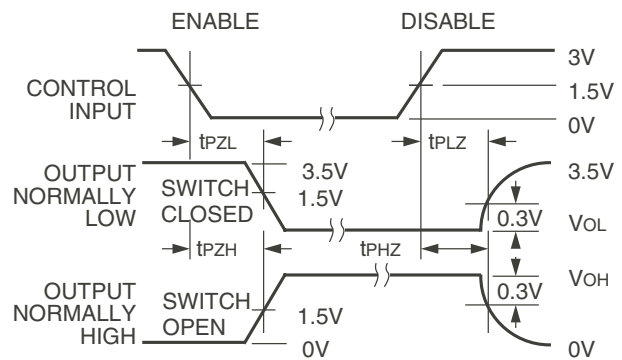

Octal Link

Enable and Disable Times

### NOTES:

- Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.
- Pulse Generator for All Pulses: Rate  $\leq 1.0\text{MHz}$ ;  $t_r \leq 2.5\text{ns}$ ;  $t_f \leq 2.5\text{ns}$ .

## ORDERING INFORMATION

| XX          | FCT | XXXX        | XX      | X                      |                                                                                                     |  |
|-------------|-----|-------------|---------|------------------------|-----------------------------------------------------------------------------------------------------|--|
| Temp. Range |     | Device Type | Package | Process                |                                                                                                     |  |
|             |     |             |         | Blank<br>B             | Industrial<br>MIL-STD-883, Class B                                                                  |  |
|             |     |             |         | SOG<br>QG              | <u>Industrial Options</u><br>Small Outline IC - Green<br>Quarter-size Small Outline Package - Green |  |
|             |     |             |         | D<br>L                 | <u>Military Options</u><br>CERDIP<br>Leadless Chip Carrier                                          |  |
|             |     |             |         | 573T<br>573AT<br>573CT | Fast CMOS Octal Transparent Latch                                                                   |  |
|             |     |             |         | 54<br>74               | 55 C to +125 C<br>40 C to +85 C                                                                     |  |

## Datasheet Document History

10/10/09 Pg. 6

Updated the ordering information by removing the "IDT" notation and non RoHS part.



**CORPORATE HEADQUARTERS**  
6024 Silver Creek Valley Road  
San Jose, CA 95138

**for SALES:**  
800-345-7015 or 408-284-8200  
fax: 408-284-2775  
www.idt.com

**for Tech Support:**  
logichelp@idt.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.