


RHASeries

- Realized higher voltage than RWF series (500 to 650V_{dc})
- Endurance with ripple current : 5,000 hours at 85°C
- Suitable for high voltage inverter
- RoHS2 compliant




SPECIFICATIONS

Items	Characteristics						
Category	-25 to +85°C						
Temperature Range							
Rated Voltage Range	500 to 650V _{dc}						
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)						
Leakage Current	I=0.02CV or 5mA, whichever is smaller. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)						
Dissipation Factor (tan δ)	0.25 max. (at 20°C, 120Hz)						
Low Temperature Characteristics	Capacitance change $C(-25^{\circ}\text{C})/C(+20^{\circ}\text{C}) \geq 0.6$ (at 120Hz)						
Insulation Resistance	When measured between the terminals that are connected to each other and to the mounting clamp on the insulating sleeve covering the case by using an insulation resistance meter of 500V _{dc} , the insulation resistance shall not be less than 100MΩ.						
Insulation Withstanding Voltage	When a voltage of 2,000V _{ac} is applied for 1 minute between the terminals that are connected to each other and to the mounting clamp on the insulating sleeve covering the case, there shall not be electrical damage.						
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 5,000 hours at 85°C. <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>D.F. (tan δ)</td><td>≤ 200% of the initial specified value</td></tr> <tr> <td>Leakage current</td><td>≤ The initial specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	D.F. (tan δ)	≤ 200% of the initial specified value	Leakage current	≤ The initial specified value
Capacitance change	≤ ±20% of the initial value						
D.F. (tan δ)	≤ 200% of the initial specified value						
Leakage current	≤ The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4. <table border="1"> <tr> <td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr> <td>D.F. (tan δ)</td><td>≤ 200% of the initial specified value</td></tr> <tr> <td>Leakage current</td><td>≤ The initial specified value</td></tr> </table>	Capacitance change	≤ ±20% of the initial value	D.F. (tan δ)	≤ 200% of the initial specified value	Leakage current	≤ The initial specified value
Capacitance change	≤ ±20% of the initial value						
D.F. (tan δ)	≤ 200% of the initial specified value						
Leakage current	≤ The initial specified value						

DIMENSIONS (Screw-Mount) [mm]

● Terminal Code : LG




φ50 & φ63.5 : G=6
φ76.2 & φ89 : G=5
φ100 : G=10

<Screw specifications>


to φ89 Plus hexagon-headed screw : M5×0.8×10
Maximum screw tightening torque : 3.23Nm

● Mounting Clamp Code : B



φD	A	B	W	F
50	78.0	64.0	68.0	22.4
63.5	90.0	76.0	80.0	28.0
76.2	104.5	90.0	93.5	31.5

● Mounting Clamp Code : C




φD	E	K	M	F	J
50	32.5	37.0	4.5	22.4	14.0
63.5	38.1	43.5	4.5	28.0	14.0
76.2	44.5	50.0	4.5	31.5	14.0
89	50.8	56.5	4.5	31.5	16.0
100	56.5	63.4	5.5	41.5	18.0

φ100 Cross-recessed head (phillips) screw : M8×1.25×16
Spring washer, Washer
Maximum screw tightening torque : 6.31Nm

* The screw and the mounting clamp are separately supplied and not attached to the product.

PART NUMBERING SYSTEM

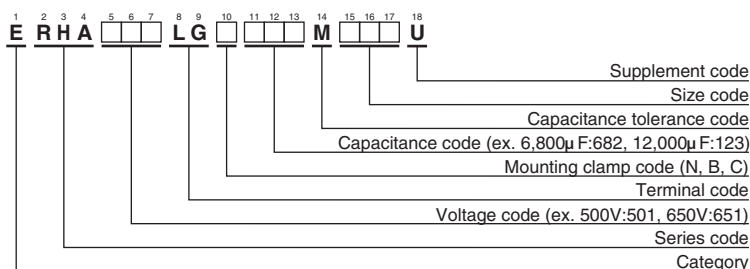

Please refer to "Product code guide (screw-mount terminal type)"

◆ **STANDARD RATINGS**

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tan δ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tan δ	Rated ripple current (Arms/ 85°C,120Hz)	Part No.
500	1,200	50×95	0.25	5.90	ERHA501LGC122MC95U	550	5,600	89×150	0.25	18.2	ERHA551LGC562MFF0U
	1,500	50×115	0.25	7.20	ERHA501LGC152MCB5U		6,800	89×170	0.25	21.1	ERHA551LGC682MFH0U
	1,800	50×130	0.25	8.30	ERHA501LGC182MCD0U		8,200	100×170	0.25	24.8	ERHA551LGC822MGH0U
	2,200	50×150	0.25	9.80	ERHA501LGC222MCF0U		10,000	100×200	0.25	29.4	ERHA551LGC103MGL0U
	2,700	63.5×120	0.25	11.2	ERHA501LGC272MDC0U	600	1,200	63.5×95	0.25	6.70	ERHA601LGC122MD95U
	3,300	63.5×140	0.25	13.3	ERHA501LGC332MDE0U		1,500	63.5×110	0.25	8.00	ERHA601LGC152MDB0U
	3,900	63.5×170	0.25	15.7	ERHA501LGC392MDH0U		1,800	63.5×125	0.25	9.30	ERHA601LGC182MDC5U
	3,900	76.2×130	0.25	15.4	ERHA501LGC392MED0U		1,800	76.2×95	0.25	9.10	ERHA601LGC182ME95U
	4,700	76.2×150	0.25	18.1	ERHA501LGC472MEF0U		2,200	63.5×145	0.25	11.0	ERHA601LGC222MDE5U
	5,600	76.2×170	0.25	20.8	ERHA501LGC562MEH0U		2,200	76.2×110	0.25	10.8	ERHA601LGC222MEB0U
	5,600	89×130	0.25	17.1	ERHA501LGC562MFD0U		2,700	63.5×170	0.25	13.1	ERHA601LGC272MDH0U
	6,800	89×150	0.25	20.0	ERHA501LGC682MFF0U		2,700	76.2×125	0.25	12.6	ERHA601LGC272MEC5U
	8,200	89×190	0.25	24.4	ERHA501LGC822MFK0U		3,300	76.2×145	0.25	14.9	ERHA601LGC332MEE5U
	10,000	89×210	0.25	28.2	ERHA501LGC103MFM0U		3,900	76.2×170	0.25	17.3	ERHA601LGC392MEH0U
	12,000	100×210	0.25	32.9	ERHA501LGC123MGM0U		3,900	89×130	0.25	14.2	ERHA601LGC392MFD0U
	15,000	100×250	0.25	39.8	ERHA501LGC153MGR0U		4,700	76.2×190	0.25	20.0	ERHA601LGC472MEK0U
							4,700	89×150	0.25	16.6	ERHA601LGC472MFF0U
							5,600	89×170	0.25	19.1	ERHA601LGC562MFH0U
550	1,000	50×95	0.25	5.40	ERHA551LGC102MC95U	650	1,000	63.5×100	0.25	6.30	ERHA651LGC102MDA0U
	1,200	50×110	0.25	6.30	ERHA551LGC122MCB0U		1,200	63.5×110	0.25	7.20	ERHA651LGC122MDB0U
	1,500	50×130	0.25	7.60	ERHA551LGC152MCD0U		1,500	63.5×130	0.25	8.60	ERHA651LGC152MDD0U
	1,800	63.5×105	0.25	8.60	ERHA551LGC182MDA5U		1,800	63.5×150	0.25	10.1	ERHA651LGC182MDF0U
	2,200	63.5×120	0.25	10.1	ERHA551LGC222MDC0U		2,200	63.5×170	0.25	11.7	ERHA651LGC222MDH0U
	2,700	63.5×150	0.25	12.4	ERHA551LGC272MDF0U		2,700	76.2×150	0.25	13.6	ERHA651LGC272MEF0U
	2,700	76.2×105	0.25	11.7	ERHA551LGC272MEA5U		3,300	76.2×170	0.25	15.8	ERHA651LGC332MEH0U
	3,300	63.5×170	0.25	14.5	ERHA551LGC332MDH0U		3,900	89×155	0.25	15.3	ERHA651LGC392MFF5U
	3,300	76.2×130	0.25	14.2	ERHA551LGC332MED0U		4,700	89×190	0.25	18.4	ERHA651LGC472MFK0U
	3,900	76.2×140	0.25	15.9	ERHA551LGC392MEE0U						
	4,700	76.2×170	0.25	19.1	ERHA551LGC472MEH0U						
	4,700	89×130	0.25	15.6	ERHA551LGC472MFD0U						

◆ **RATED RIPPLE CURRENT MULTIPLIERS**

● Frequency Multipliers

Frequency (Hz)	50	120	300	1k	3k
Coefficient	0.8	1.0	1.2	1.3	1.4

Note : The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5 to 10°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced. Also, for the RHA series capacitors, using them at operating voltage less than their rated voltage can extend their lifetime. For details, please contact a representative of Nippon Chemi-Con.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

United Chemi-Con (UCC):

<u>ERHA651LGC332MEH0M</u>	<u>ERHA551LGC392MEE0M</u>	<u>ERHA501LGC182MCD0M</u>	<u>ERHA551LGC332MED0M</u>
<u>ERHA651LGC472MFK0M</u>	<u>ERHA551LGC822MGH0M</u>	<u>ERHA501LGC123MGM0M</u>	<u>ERHA501LGC332MDE0M</u>
<u>ERHA551LGC472MEH0M</u>	<u>ERHA551LGC122MCB0M</u>	<u>ERHA601LGC332MEE5M</u>	<u>ERHA501LGC562MEH0M</u>
<u>ERHA551LGC102MC95M</u>	<u>ERHA651LGC392MFF5M</u>	<u>ERHA601LGC182ME95M</u>	<u>ERHA601LGC392MEH0M</u>
<u>ERHA501LGC682MFF0M</u>	<u>ERHA601LGC472MFF0M</u>	<u>ERHA501LGC103MFM0M</u>	<u>ERHA601LGC562MFH0M</u>
<u>ERHA651LGC272MEF0M</u>	<u>ERHA651LGC152MDD0M</u>	<u>ERHA551LGC103MGL0M</u>	<u>ERHA551LGC222MDC0M</u>
<u>ERHA651LGC122MDB0M</u>	<u>ERHA551LGC272MDF0M</u>	<u>ERHA501LGC122MC95M</u>	<u>ERHA651LGC102MDA0M</u>
<u>ERHA551LGC562MFF0M</u>	<u>ERHA501LGC472MEF0M</u>	<u>ERHA651LGC182MDF0M</u>	<u>ERHA651LGC222MDH0M</u>
<u>ERHA551LGC182MDA5M</u>	<u>ERHA551LGC152MCD0M</u>	<u>ERHA601LGC272MDH0M</u>	<u>ERHA601LGC272MEC5M</u>
<u>ERHA501LGC562MFD0M</u>	<u>ERHA501LGC153MGR0M</u>	<u>ERHA501LGC222MCF0M</u>	<u>ERHA551LGC682MFH0M</u>
<u>ERHA501LGC272MDC0M</u>	<u>ERHA601LGC222MEB0M</u>	<u>ERHA501LGC822MFK0M</u>	<u>ERHA601LGC392MFD0M</u>
<u>ERHA501LGC392MED0M</u>	<u>ERHA601LGC152MDB0M</u>	<u>ERHA501LGC152MCB5M</u>	<u>ERHA501LGC392MDH0M</u>
<u>ERHA601LGC222MDE5M</u>	<u>ERHA551LGC332MDH0M</u>	<u>ERHA551LGC272MEA5M</u>	<u>ERHA551LGC472MFD0M</u>
<u>ERHA601LGC182MDC5M</u>	<u>ERHA601LGC472MEK0M</u>	<u>ERHA601LGC122MD95M</u>	<u>ERHA601LGC562MFH0U</u>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.